



A I R M A T T E R S



## Cooker Hood Collection

11th edition

# AIR MATTERS

Air is without substance: a free spirit. At Faber we can weigh it, measure it, adapt it and shape it like solid matter. Air has been our substance for more than 60 years. Air technology is the reason we work. We are confident about our achievements because we know how to handle it.

Established in 1955 in Fabriano Italy, Faber are the original inventors of the cooker hood for kitchens.

Faber invented the kitchen hood in a small Italian workshop; for decades they have created, designed and manufactured hoods, becoming a global leader in the industry with regards to both production and technology. In Italy, one hood out of every two is a Faber hood. Faber's mission is to design and produce cooker hoods with high quality, technology and efficiency, to satisfy tastes and needs of the most diverse consumers.

Faber are an industrial group with a presence across the globe. They have commercial and production sites in eight nations and three continents. Today, with 60 years experience, key strengths include commitment, solidity, dedication and dynamism, which have always characterised the company. Faber transformed the range hood from a simple built-in element to a beautiful and functional appliance.

Faber do not confuse function with design but they are committed to innovation in both areas. Faber design their models knowing that the hood has a strong visual impact, enhancing and harmonizing the lines of the kitchen, integrating itself without losing its own style. Faber's response to consumer tastes can be seen in the wide range they offer so that every individual can reflect their own style in the kitchen. Faber's hoods are beautiful, ergonomic, efficient, and silent. More importantly, Faber's hoods do what they are intended to: they circulate the air in your kitchen in comfort.

## 1955

Faber Plast is founded.

## 1958



The first Plexiglas hood.

## 1963



EURO  
The first compact extractor fan housed in the hood.

## 1976



FL12 & FL15  
The first pull-out hoods.

## 1986



NOVA  
The first chimney hood.

## 1995



AXIA  
The first T-shape hood.

## 1999



M@STER  
The first smart hood.

## 2004



MATRIX  
The first hood that hangs like a picture.

## 2005



MAGICA  
The first self-activated hood..

## 2008



KLIMA  
The first air conditioning hood..

## 2009



IMAGO  
The first multi-function hood.

## 2010



F-LIGHT GENERATION  
The first chandelier hoods.

## 2014



SKYLIFT  
The first retractable hood built into the ceiling.

## 2015

Faber celebrate 60 years

# LEADERSHIP ALL OVER THE WORLD.



FABER  
**Fabriano (AN) - ITALIA**

FABER OFFICE  
**Hudson - U.S.A.**

SPAR SAN LUIS  
**Buenos Aires - ARGENTINA**

FRANKE MUTFAK  
**Manisa - TURKEY**

FRANKE FABER INDIA  
**Pune - INDIA**


ROBLIN  
**Villedieu-les-Poeles - FRANCE**

FRANKE FUTURUM  
**Byske - SWEDEN**

FABER OFFICE  
**Moscow - RUSSIA**

FABER NORTH AMERICA  
**San Luis Potosi - MEXICO**

## Choosing the right Cooker Hood



Choosing the right hood for your kitchen is not just about visual appeal...

In order to select the most suitable hood for your kitchen, you need to perform some very simple calculations to establish if the hood can extract sufficient volumes in your kitchen.

Simply measure, in meters, the length, width and height of your kitchen to calculate the volume. The volume calculation is performed as follows:

$$\text{Length (m)} \times \text{Width (m)} \times \text{Height (m)} = \text{Volume (m}^3\text{)}$$

Next multiply the volume by 10. The answer will give you the required capacity for your kitchen. When selecting your hood examine the Max Airflow and if the maximum airflow matches or exceeds your required capacity the hood is suitable for your kitchen.

You should also factor in the noise levels as you do not want to have a hood that matches your required capacity but is very loud. A simple guide for noise levels is if the hoods noise levels are below 55dB(A) it will not disturb your normal kitchen life. All hoods show the noise level range with the loudest noise representing the max airflow.

Please note that all extraction rates and noise levels reported within this brochure are in accordance with IEC standards. The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECED Code of Conduct. This Code of Conduct establishes clear rules of measurement common to all cooker hood manufacturers IEC/EN 61591. Please ensure that any cooker hoods you make look at comply with the code of conduct to make an accurate comparison.

## Built In



104/2104  
7



2108  
7



Scrigno  
7



Flexa/Hip  
8



Omnia  
8



Maxima  
8



Inca Smart  
9



Inca Smart HC  
9



Inca Plus  
9



In-Nova Smart  
9 **NEW**



In-Nova Comfort  
10 **NEW**



Inca Lux 2.0  
10



Victory 2.0  
11



Inca Lux Glass  
11



In-Nova Premium  
12 **NEW**



In-Light  
12



Swift  
12



## Wall



Vesta  
15



Strip  
15



Gemma  
15



Ray  
16



Nice  
16




Stilo  
16



Glove  
17



Bella  
17 **NEW**



Stilux  
18



Look  
18



T-Light  
19



Solaris  
19



## Vertical & Designer



Tweet  
21



Daisy Plus  
21 **NEW**

Steelmax  
12



Vanity  
22 **NEW**



Cocktail XS  
23



Cocktail  
23



Glam Light  
24



Chloe XL  
24 **NEW**



Northia  
25



Jolie  
25



BlackTie  
26



Infinity  
26




Chloe  
27 **NEW**



Veil  
28 **NEW**



Talika  
29




## Down Draft



Hoo-B  
31



Hob FCH32  
31



Hob FCH64  
32



Hob FCH93  
33

## Ceiling Island



Heaven 2.0  
35



Heaven 2.0 Glass  
35



Heaven 2.0 Flat  
36



Heaven 2.0 Flat Glass  
36



High-Light  
37



High-Light White  
37

Heaven Compact  
38 **NEW**



SkyPad 2.0  
38



Pareo Plus  
39 **NEW**



Tratto  
40



Stilo  
40



T-Light  
41



Vanilla Plus  
41 **NEW**



Kalidos Plus  
42 **NEW**



Lybra Plus  
42 **NEW**

## External Motor



Heaven 2.0  
45



Heaven 2.0 Glass  
45



Fabula  
45



Jolie  
46



Ray  
46



Stilo  
46



Stilo Island  
46


## Accessories And Diagrams



Ducting Kit  
47



Filters  
47




High Performance  
Filters 48



HFH Filter  
48



Silent Kit  
49




Remote Blower  
49



Splashbacks  
49



Chimney  
50



Diagrams  
51







Hood can be vented directly out without the use of the chimney



The new Faber diffuser enables a leap in energy quality from Class C to Class A. It also provides high performance with low power consumption.



This technology offers pleasant natural lighting and faithfully reproduces the colour of the illuminated items at just 2W.



85% power consumption (kW/h) at medium-low speeds that are most often used. It is the most silent motor on the market.



Allows the hood to be switched on for 24 hours a day for continuous air renewal with a level of noise that is imperceptible.



Energy Diffuser: it reduces noise up to 3dB(A) and higher hood efficiency by 30% even in the presence of long air outlet.



High Filtration kit that reduces extraction by just 5%, the filter can be placed in the dishwasher and reused



The Evo diffuser has an optimised geometry that results in excellent energy efficiency, reduced power consumption and noise level.



Filter saturation alarm: warns you when it is time to clean the anti-grease filter or substitute the anti-odour filter.



The ability to install the motor away from the hood frees it from architectural constraints and reduces noise in the kitchen.



A high performance filter that only reduces extraction by 15% and lasts twice as long as standard filters



Function which activates maximum aspiration for 6 minutes to meet special cooking needs.



Reduced light intensity with the simple press of a button with low level of energy consumption, light can be left on for long periods of time.



A special range of hoods and hobs that communicate and can be controlled via the hob.




Allows automatic delayed switching off of the motor to complete elimination of residual odours.



Faber hoods with electronic commands come with remote controls, which are particularly useful for people with reduced mobility.



Reduces the perceived sound by up to 25%. (\*) Washable sound-absorbing cushions which sound proof the hood. (\*) Equal to a reduction of 3dB(A) according to norm EN 60704-3



Hoods that have the motor concealed in the main body, thus eliminating the need for a chimney in recycle mode.



Offers maximum comfort and practicality in the kitchen: operated by remote control the hood gently lowers onto the hob increasing its efficiency.



Reduces the perceived sound by 25%. This aspiration guarantees optimised effectiveness




Anti-fingerprint steel, Special anti-fingerprint steel for a perfectly clean hood and a steel surface free of annoying marks.



Double extraction is derived from the overlapping of two glass panels in vertical hoods, ensuring greater hood effectiveness



Eliminates the condensation effect under and around the hood. Controlled air jets released from the hood create two vortices that control the intake of smoke and steam.

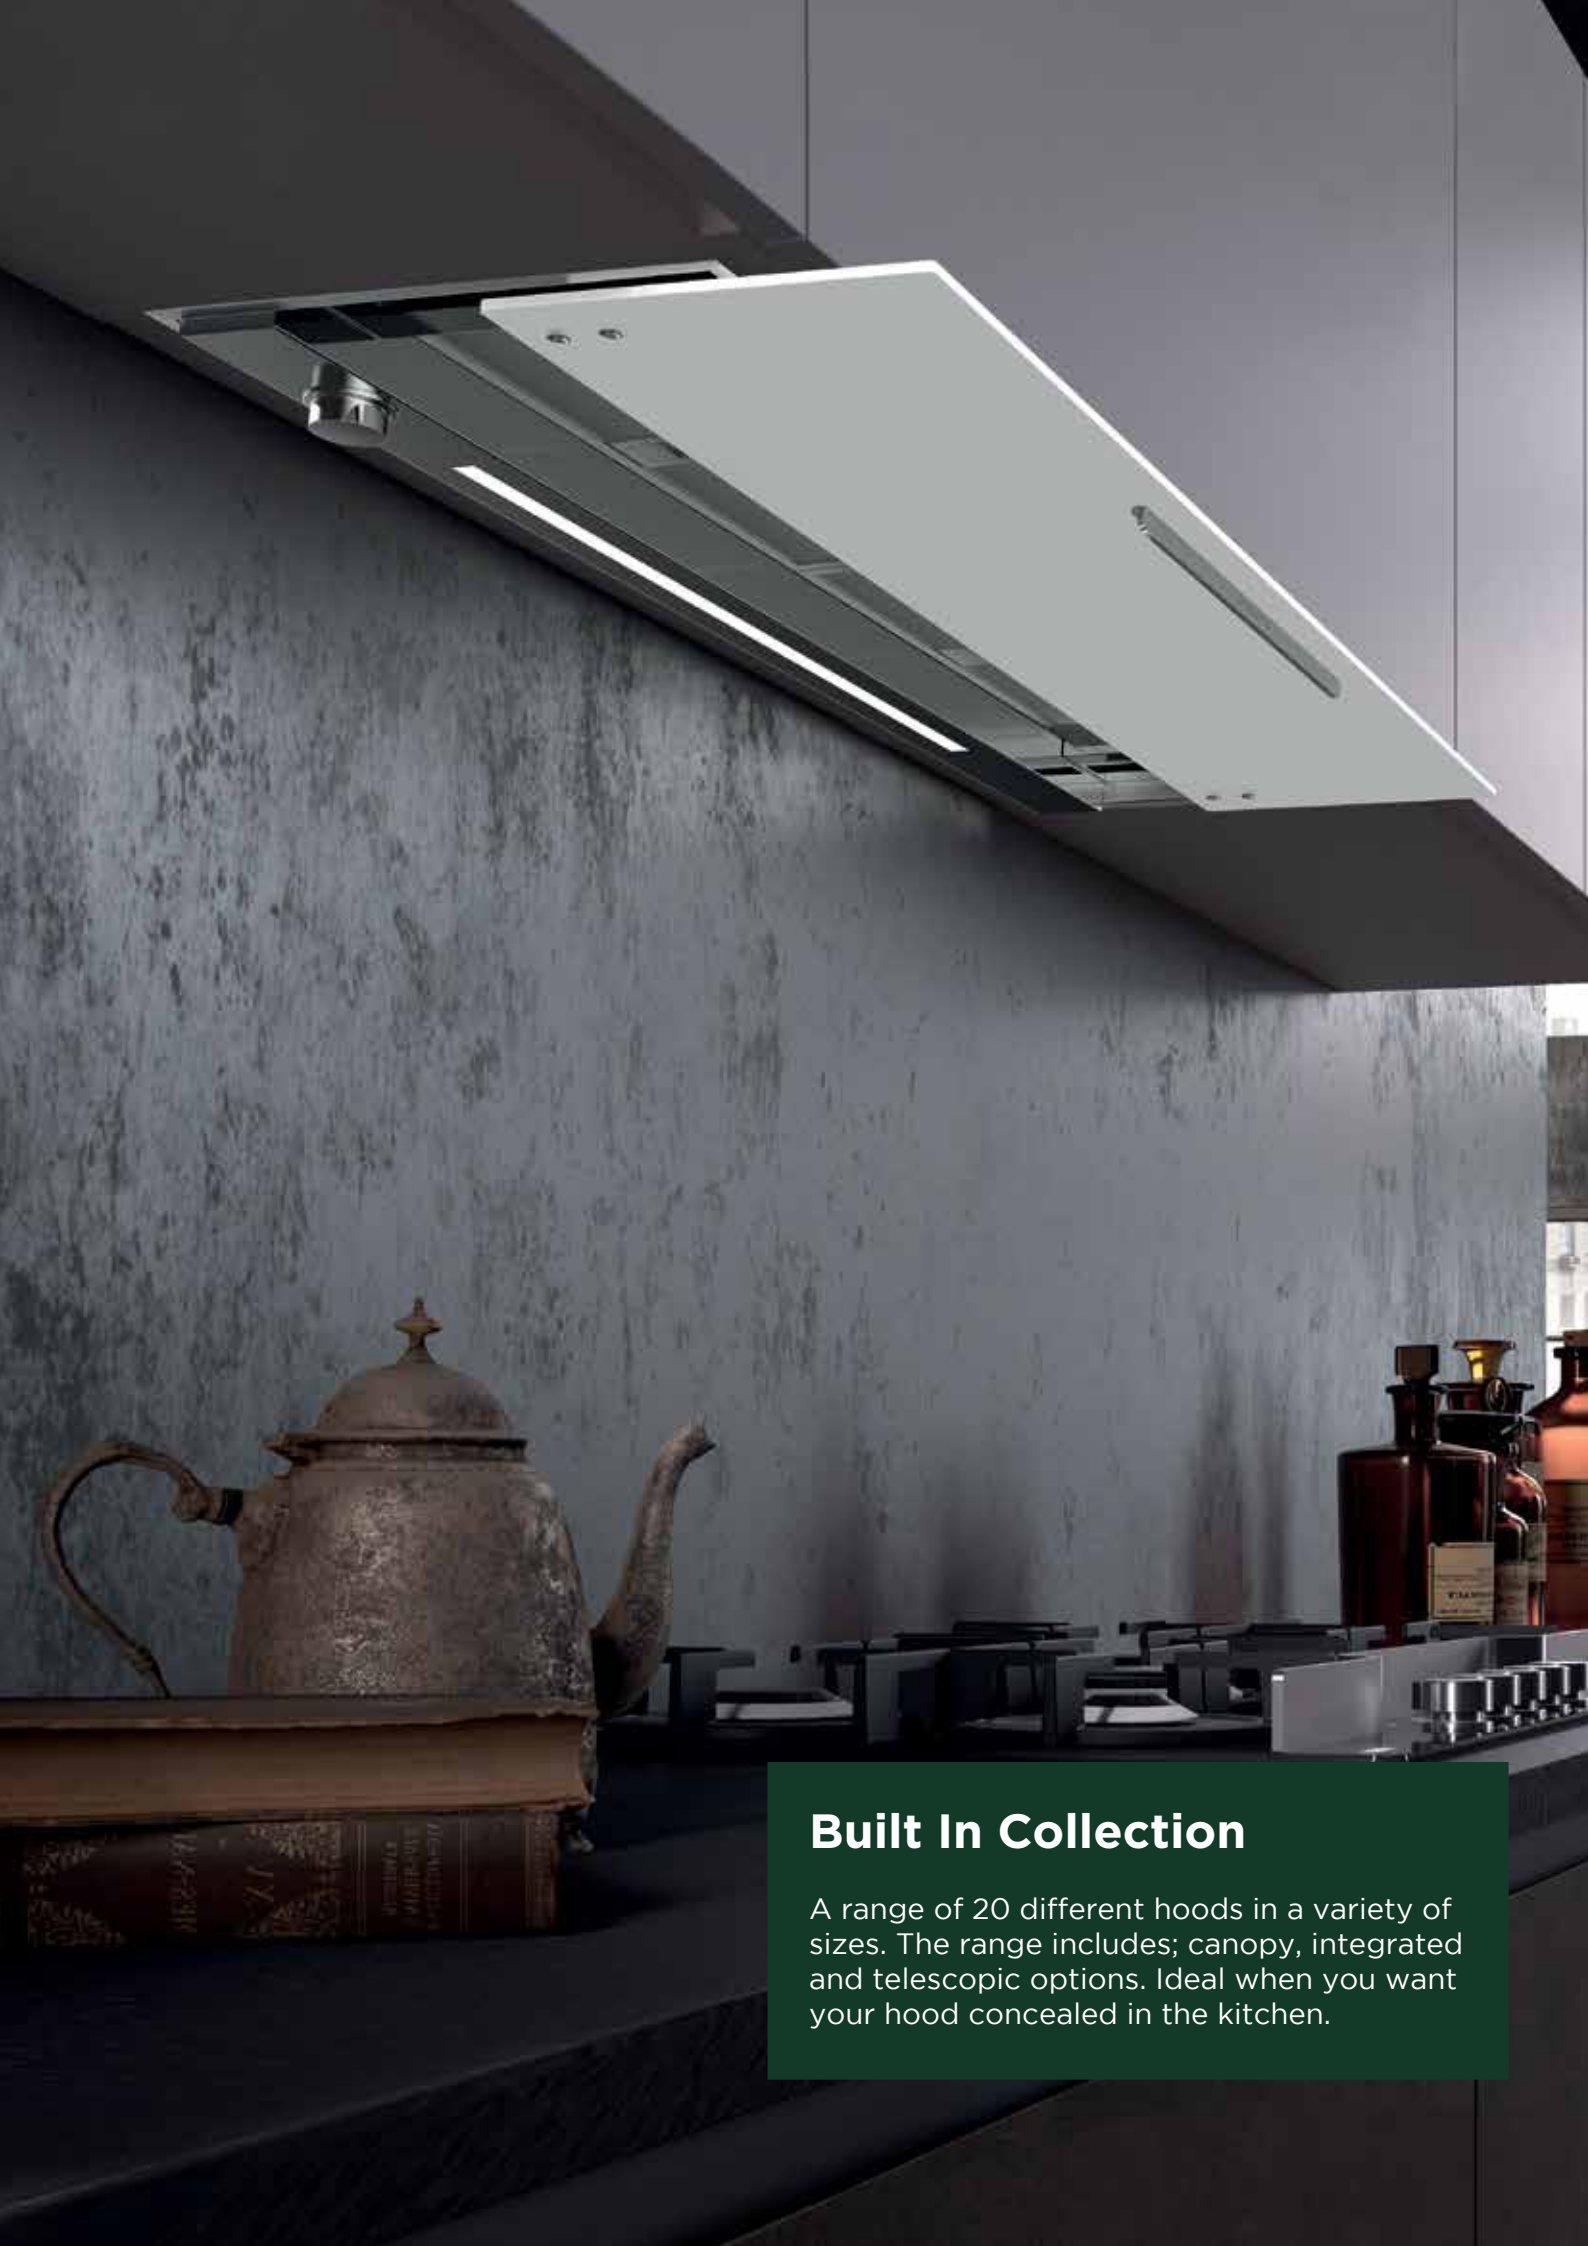

## Built In Collection

A range of 20 different hoods in a variety of sizes. The range includes; canopy, integrated and telescopic options. Ideal when you want your hood concealed in the kitchen.

## 104

FA104 Single Motor



Finish: Grey  
Micro Switch controls  
Width: 600 mm

Metal Filters  
Incandescent lamps  
Energy: E rated

Speed	1	2	3
Air m3/h	120	160	230
Noise dB(A)	52	56	62

Single Motor €83

## 2104

FA2104 Twin Motor



Finish: Grey  
Micro Switch controls  
Width: 600 mm

Dishwasher Safe Filters  
Incandescent lamps  
Energy: E rated

Speed	1	2	INT
Air m3/h	250	370	490
Noise dB(A)	56	61	67

Twin Motor €105

## 2108

FA210860GR - 600 mm

FA210869GR - 900 mm



Finish: Light Grey  
Electromechanical Controls  
Width: 600 / 900 mm

Dishwasher Safe Filters  
2 x 28W lights  
Energy: D rated

Speed	1	2	INT
Air m3/h	240	310	510
Noise dB(A)	60	64	72

600 mm €205

900 mm €215

## Scrigno

FASC60SSG - 563 mm

FASC90SSG - 863 mm



Finish: Stainless Steel  
Electromechanical Controls  
Width: 560 / 860 mm

Dishwasher Safe Filters  
2 x 20W lights  
Energy: C rated

Speed	1	2	3
Air m3/h	310	480	620
Noise dB(A)	49	58	65

563 mm €409

863 mm €459



All extraction rates and noise levels reported are in accordance with IEC standards.

The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECD **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591



## Flexa

FAFL60GR - 600 mm



Finish: Metal Grey      Dishwasher Safe Filters  
Electromechanical Controls      2 x 28W lights  
Width: 600 mm      Energy: E rated

Speed	1	2	3
Air m3/h	190	250	300
Noise dB(A)	50	56	62

600 mm €109

## Flexa Hip

FAFH60ASS - 600 mm



Finish: Alu / Stainless Steel      Dishwasher Safe Filters  
Electromechanical Controls      2 x 28W lights  
Width: 600 mm      Energy: E rated

Speed	1	2	3
Air m3/h	220	320	420
Noise dB(A)	57	65	69

600 mm €135

## Omnia

FAOM60ASS - 600 mm

FAOM90ASS - 900 mm



Finish: Alu / Stainless Steel      Dishwasher Safe Filters  
Electromechanical Controls      2x9W lights  
Width: 600 / 900 mm      Energy: E rated

Speed	1	2	3	4
Air m3/h	270	375	430	480
Noise dB(A)	53	60	63	67

600 mm €219

900 mm €249

## Maxima

FAMX60ASS - 600 mm

FAMX90ASS - 900 mm



Finish: Alu / Stainless Steel      Dishwasher Safe Filters  
Electromechanical Controls      2 x 20W lights  
Width: 600 / 900 mm      Energy: C rated

Speed	1	2	3
Air m3/h	310	490	640
Noise dB(A)	51	61	67

600 mm €269

900 mm €289

All extraction rates and noise levels reported are in accordance with IEC standards.  
The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECD **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591

All retail prices include VAT at 23%  
For technical information log onto [www.fff.ie](http://www.fff.ie)

⌘ = Lead times apply for these models of up to 6 Weeks

Subject to technical modifications and changes to the range without notice



Finish: Light Grey      Dishwasher Safe Filters  
Electromechanical Controls      2 X LED lights  
Width: 520 / 700 mm      Energy: C rated

Speed	1	2	3
Air m3/h	160	220	335
Noise dB(A)	54	59	66

520 mm €85

700 mm €95



Finish: Stainless Steel      Dishwasher Safe Filters  
Electromechanical Controls      2 X LED lights  
Width: 520 / 700 mm      Energy: B rated

Speed	1	2	INT
Air m3/h	180	270	390
Noise dB(A)	54	62	70

520 mm €139

700 mm €145



Finish: Stainless Steel      Dishwasher Safe Filters  
Electromechanical Controls      2 X LED lights  
Width: 520 / 700 mm      Energy: B rated

Speed	1	2	3
Air m3/h	260	400	580
Noise dB(A)	56	61	70

520 mm €155

700 mm €169



Finish: Stainless Steel      Dishwasher Safe Filters  
Pull Out Knob Control      2 X LED lights  
Width: 900 / 1200 mm      Energy: D rated

Speed	1	2	3
Air m3/h	200	260	360
Noise dB(A)	57	62	68

900 mm €309

1200 mm €339

All extraction rates and noise levels reported are in accordance with IEC standards IEC/EN 61591. See Page 2

## In-Nova Comfort

FAINC90SS - 900 mm

FAINC120SS - 1200 mm



Finish: Stainless Steel  
Pull Out Knob Control  
Width: 900 / 1200 mm

Dishwasher Safe Filters  
2 LED lights  
Energy: C rated

Speed	1	2	3
Air m3/h	270	410	540
Noise dB(A)	56	64	69

900 mm €399

1200 mm €439

## Inca Lux 2.0

FAIL52SS - 520 mm

FAIL70SS - 700 mm



Finish: Stainless Steel  
Electronic LED Controls  
Width: 520 / 700 mm

Dishwasher Safe Filters  
2 x LED lights  
Energy: B-700 C-520

Speed	1	2	3	INT
Air m3/h	310	470	610	690
Noise dB(A)	50	59	65	68

520 mm €389

700 mm €399

All extraction rates and noise levels reported are in accordance with IEC standards.  
The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECEC **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/ EN 61591


All retail prices include VAT at 23%  
For technical information log onto [www.fff.ie](http://www.fff.ie)

⌘ = Lead times apply for these models of up to 6 Weeks

Subject to technical modifications and changes to the range without notice

## Victory 2.0

FAVI277SS - 770 mm  
FAVI299SS - 990 mm

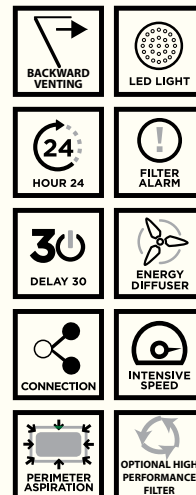

Finish: Stainless Steel      Dishwasher Safe Filters  
Electronic LED Controls      LED lights  
Width: 770 / 990 mm      Energy: C rated


Speed	1	2	3	INT
Air m3/h	230	350	485	585
Noise dB(A)	50	61	67	70

770 mm €459

990 mm €489

## Inca Lux Black Glass

FAIL52BG - 520 mm  
FAIL70BG - 700 mm

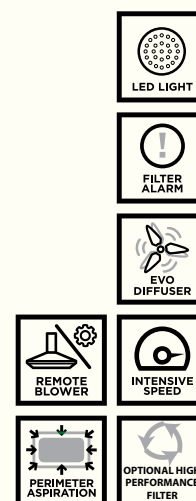

Finish: Glass/Stainless Steel      Dishwasher Safe Filters  
Electronic Touch Controls      2 x LED lights  
Width: 520 / 700 mm      Energy: B-700 C-520

Speed	1	2	3	INT
Air m3/h	300	460	590	660
Noise dB(A)	54	65	69	71

520 mm €419


700 mm €439

All extraction rates and noise levels reported are in accordance with IEC standards.

The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECD **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591

## Inca Lux White Glass

FAIL52WG - 520 mm  
FAIL70WG - 700 mm

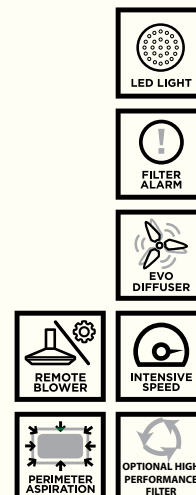

Finish: Glass/Stainless Steel    Dishwasher Safe Filters  
Electronic Touch Controls    2 x LED lights  
Width: 520 / 700 mm    Energy: B-700 C-520


Speed	1	2	3	INT
Air m3/h	300	460	590	660
Noise dB(A)	54	65	69	71

520 mm €419

700 mm €439

## In-Nova Premium

FAINP90SS - 900 mm  
FAINP120SS - 1200 mm

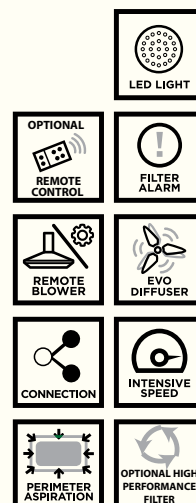

Finish: Stainless Steel    Dishwasher Safe Filters  
Electronic SENSOR    2 LED lights  
Width: 900 / 1200 mm    Energy: A rated

Speed	1	2	3	INT
Air m3/h	280	420	570	670
Noise dB(A)	53	62	68	70

900 mm €529

1200 mm €559

All extraction rates and noise levels reported are in accordance with IEC standards.

The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECD **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/ EN 61591

All retail prices include VAT at 23%  
For technical information log onto [www.fff.ie](http://www.fff.ie)


⚡ = Lead times apply for these  
models of up to 6 Weeks

Subject to technical modifications  
and changes to the range without notice



## In-Light

FAINL52SS - 520 mm  
FAINL70SS - 700 mm

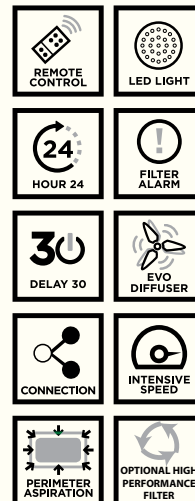

Finish: Stainless Steel  
Electronic LED Controls  
Width: 520 / 700 mm

Dishwasher Safe Filters  
Perimeter LED light  
Energy: A rated

Speed	1	2	3	INT
Air m3/h	260	380	525	635
Noise dB(A)	56	65	70	72

520 mm €719

700 mm €739

## Swift

FASW60WG - 600 mm  $\text{†}$   
FASW90WG - 900 mm  $\text{†}$



Finish: S-Steel/White Glass  
Knob/Sliding Glass Controls  
Width: 600 / 900 mm

Dishwasher Safe Filters  
LED lights  
Energy: A rated

Speed	1	2	3	INT
Air m3/h	240	380	460	520
Noise dB(A)	59	66	69	71

600 mm €899

900 mm €949

All extraction rates and noise levels reported are in accordance with IEC standards.

The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECD **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591



## Wall Collection

A range of 13 different hoods in a variety of sizes. The range includes; T-Shaped, glass and chimney designs. High performance as a standard.

## Vesta

FAVE60BK - 600 mm  
FAVE90BK - 900 mm



Finish: Black  
Electromechanical Controls  
Width: 600 / 900 mm  
Dishwasher Safe Filters  
2 x 28W lights  
Energy: E rated

Speed	1	2	3
Air m3/h	230	330	430
Noise dB(A)	53	61	67

600 mm €115

900 mm €125

## Vesta

FAVE60SS - 600 mm  
FAVE90SS - 900 mm



Finish: Stainless Steel  
Electromechanical Controls  
Width: 600 / 900 mm  
Dishwasher Safe Filters  
2 x 28W lights  
Energy: E rated

Speed	1	2	3
Air m3/h	230	330	430
Noise dB(A)	53	61	67

600 mm €125

900 mm €135

## Strip

FAST60SS - 600 mm  
FAST90SS - 900 mm



Finish: Stainless Steel  
Push Button Controls  
Width: 600 / 900 mm  
Dishwasher Safe Filters  
2 x 28W lights  
Energy: E rated

Speed	1	2	3
Air m3/h	265	355	410
Noise dB(A)	49	54	61

600 mm €169

900 mm €179

## Gemma

FAGE60SS - 600 mm  
FAGE90SS - 900 mm



Finish: Stainless Steel  
Electromechanical Controls  
Width: 600 / 900 mm  
Dishwasher Safe Filters  
2 x 28W lights  
Energy: E rated

Speed	1	2	3
Air m3/h	210	285	370
Noise dB(A)	52	59	63

600 mm €239

900 mm €259

All extraction rates and noise levels reported are in accordance with IEC standards.

The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECD **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591

## Ray

FARA60SS - 600 mm  
FARA90SS - 900 mm



Finish: Glass/Stainless Steel      Dishwasher Safe Filters  
Push Button Controls              2 x 20W Lights  
Width: 600 / 900 mm              Energy: E rated

Speed	1	2	3
Air m3/h	210	330	410
Noise dB(A)	50	60	66

600 mm €249

900 mm €269

## Nice

FANI60SS - 600 mm  
FANI90SS - 900 mm



Finish: Glass/Stainless Steel      Dishwasher Safe Filters  
Push Button Controls              2 x 20W Lights  
Width: 600 / 900 mm              Energy: E rated


Speed	1	2	3
Air m3/h	210	330	410
Noise dB(A)	50	60	66

600 mm €249

900 mm €269

## Stilo

FASE60SS - 600 mm  
FASE90SS - 900 mm  
FASE120SS - 1200 mm  $\nabla$

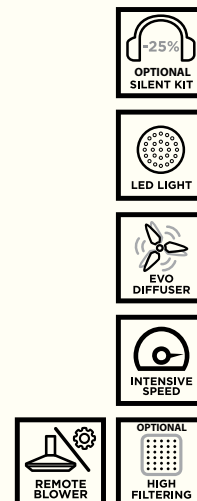

Finish: Stainless Steel              Dishwasher Safe Filters  
Electronic Touch Controls          2 x LED lights  
Width: 600 / 900 mm              Energy: B rated

Speed	1	2	3	INT
Air m3/h	300	460	620	700
Noise dB(A)	52	62	69	71

600 mm €329

900 mm €349

1200 mm €419

All extraction rates and noise levels reported are in accordance with IEC standards.  
The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECEC **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591

All retail prices include VAT at 23%  
For technical information log onto [www.fff.ie](http://www.fff.ie)

$\nabla$  = Lead times apply for these  
models of up to 6 Weeks

Subject to technical modifications  
and changes to the range without notice

FAGL60SS - 600 mm  
FAGL90SS - 900 mm




Finish: Stainless Steel	Dishwasher Safe Filters
Touch Controls	2 x LED lights
Width: 600 / 900 mm	Energy: C rated

Speed	1	2	3	INT
Air m3/h	275	400	480	510
Noise dB(A)	57	64	68	70

900 mm €399

FABE60SS - 600 mm  
FABE90SS - 900 mm

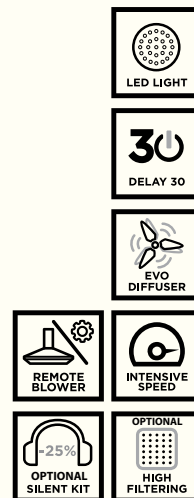

Finish: Stainless Steel	Dishwasher Safe Filters
SquarCLE Touch Controls	2 x LED lights
Width: 600 / 900 mm	Energy: B rated

Speed	1	2	3	INT
Air m3/h	300	460	620	700
Noise dB(A)	52	62	69	71

900 mm €479

The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECEC **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591

Subject to technical modifications  
and changes to the range without notice



## Stilux

FASX60SSG - 600 mm  
FASX90SSG - 900 mm



Finish: Glass/Stainless Steel    Dishwasher Safe Filters  
Touch Controls                      2 x LED lights  
Width: 600 / 900 mm              Energy: A+ rated

Speed	1	2	3	INT
Air m3/h	300	420	580	700
Noise dB(A)	52	59	66	69

600 mm €479

900 mm €499

## Look

FALO90SS - 900 mm



Finish: Glass/Stainless Steel    Dishwasher Safe Filters  
Evo Touch Controls                      2 LED lights  
Width: 900 mm                          Energy: A+ rated

Speed	1	2	3	INT
Air m3/h	400	510	620	680
Noise dB(A)	54	61	65	69

900 mm €839

All extraction rates and noise levels reported are in accordance with IEC standards.  
The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECEC **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591

All retail prices include VAT at 23%  
For technical information log onto [www.fff.ie](http://www.fff.ie)

⌚ = Lead times apply for these models of up to 6 Weeks

Subject to technical modifications and changes to the range without notice



T-Light  
FATL90SS - 900 mm

- LED LIGHT
- PERIMETER ASPIRATION
- EVO DIFFUSER
- OPTIONAL REMOTE CONTROL
- INTENSIVE SPEED
- CONNECTION
- OPTIONAL HIGH PERFORMANCE FILTER

Finish: Stainless Steel  
Squarcle Controls  
Width: 900 mm

Dishwasher Safe Filters  
Perimeter LED lights  
Energy: A rated

Speed	1	2	3	INT
Air m3/h	260	380	525	635
Noise dB(A)	56	65	70	72

900 mm €959



Solaris  
FASO100SS - 1000 mm

- REMOTE BLOWER
- ENERGY DIFFUSER

Finish: Stainless Steel  
Electromechanical Controls  
Width: 1000 x 1000 mm

Dishwasher Safe Filters  
4 x 20 W lights  
Energy: D rated

Speed	1	2	3
Air m3/h	300	440	570
Noise dB(A)	57	64	71

1000 mm €799

All extraction rates and noise levels reported are in accordance with IEC standards.  
The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECEC **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591



## Vertical & Designer Collection

A range of 15 different hoods in a variety of sizes and finishes. Vertical hoods have the advantage of attractive designs which also act as "head savers"





## Tweet

FATW80BG - 800 mm  
FATW80WG - 800 mm




Finish: Black/White Glass  
Electronic Touch Controls  
Width: 800 mm

Dishwasher Safe Filters  
2 x 20W lights  
Energy: C rated

Speed	1	2	3	INT
Air m3/h	310	480	620	700
Noise dB(A)	52	61	67	70

Black Glass €429

White Glass €469

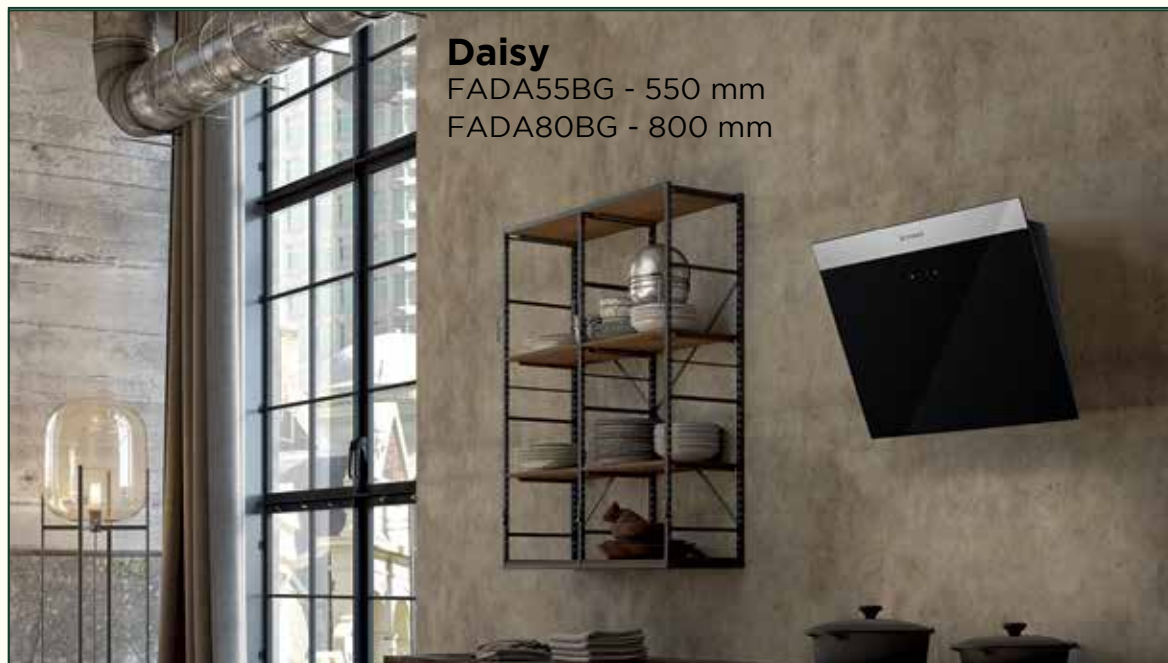

## Daisy

FADA55BG - 550 mm  
FADA80BG - 800 mm



Finish: Glass/Stainless Steel  
Electronic Touch Controls  
Width: 550 / 800 mm


Dishwasher Safe Filters  
2 LED lights  
Energy: D rated

Speed	1	2	3	INT
Air m3/h	290	430	510	550
Noise dB(A)	56	63	68	70

550 mm €489

800 mm €539

All extraction rates and noise levels reported are in accordance with IEC standards.  
The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECD **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591

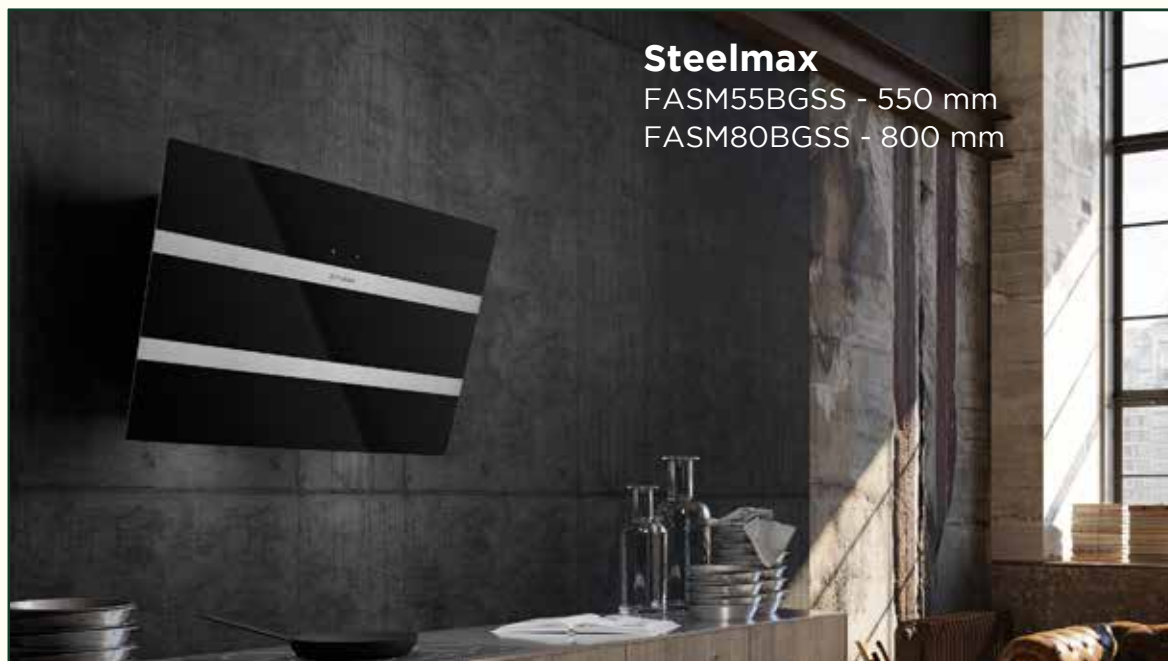

## Steelmax

FASM55BGSS - 550 mm  
FASM80BGSS - 800 mm



Finish: Glass/Stainless Steel    Dishwasher Safe Filters  
Electronic Touch Controls    2 x 20W  
Width: 550 / 800 mm    Energy: C rated

Speed	1	2	3	INT
Air m3/h	310	480	620	700
Noise dB(A)	52	61	67	70

550 mm €499

800 mm €559



## Vanity

FAVA80BG - 800 mm



Finish: Black Glass    Dishwasher Safe Filters  
Touch Control    2 LED lights  
Width: 800 mm    Energy: C rated

Speed	1	2	3	INT
Air m3/h	290	430	510	550
Noise dB(A)	56	63	68	70

800 mm €579

All extraction rates and noise levels reported are in accordance with IEC standards.  
The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECD **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591

All retail prices include VAT at 23%  
For technical information log onto [www.fff.ie](http://www.fff.ie)

⌘ = Lead times apply for these models of up to 6 Weeks

Subject to technical modifications and changes to the range without notice





## Cocktail XS

FACO55BG - Black Glass 550 mm

FACO55BG - White Glass 550 mm



Finish: Glass/Stainless Steel    Dishwasher Safe Filters  
Electronic Touch Controls    2 x LED lights  
Width: 800 mm    Energy: C rated

Speed	1	2	3	INT
Air m3/h	285	415	500	535
Noise dB(A)	56	62	66	68

White Glass 550 mm €589


Black Glass 550 mm €589



## Cocktail

FACO80BG - Black Glass 800 mm

FACO80BG - White Glass 800 mm

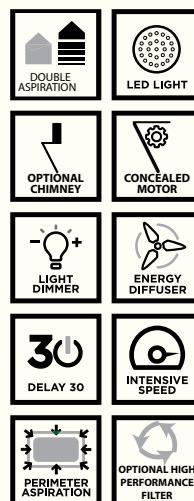

Finish: Glass/Stainless Steel    Dishwasher Safe Filters  
Electronic Touch Controls    2 x LED lights  
Width: 800 mm    Energy: C rated

Speed	1	2	3	INT
Air m3/h	285	415	500	535
Noise dB(A)	56	62	66	68

White Glass 800 mm €599

Black Glass 800 mm €599

All extraction rates and noise levels reported are in accordance with IEC standards.

The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECD **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591

## Glam-Light

FAGT80WG - 800 mm



Finish: White Glass

Touch Controls

Width: 800 mm

Dishwasher Safe Filters

LED Lights

Energy: A+ rated

Speed	1	2	3	INT
Air m3/h	310	420	580	720
Noise dB(A)	52	56	62	65

800 mm €689

## Chloe XL

FACHX110xx- 1100 mm ₣



Finish: Matt Grey/Cast Iron

Electromechanical Knob

Width: 1100 mm

Dishwasher Safe Filters

2 LED lights

Energy: C rated

Speed	1	2	3
Air m3/h	280	420	570
Noise dB(A)	51	60	67

Grey Matt 1100 mm €699

Cast Iron 1100 mm €699

All extraction rates and noise levels reported are in accordance with IEC standards.  
The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECD **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/ EN 61591

All retail prices include VAT at 23%  
For technical information log onto [www.fff.ie](http://www.fff.ie)


₣ = Lead times apply for these  
models of up to 6 Weeks

Subject to technical modifications  
and changes to the range without notice



## Northia

FANO90BG - Black Glass  
FANO90WG - White Glass

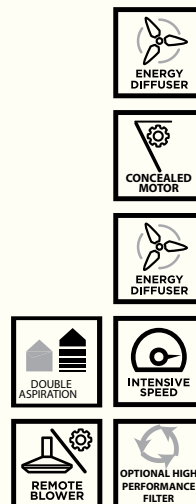

Finish: Glass/Stainless Steel    Dishwasher Safe Filters  
Touch Controls    2 x LED lights  
Width: 900 mm    Energy: A rated


Speed	1	2	3	INT
Air m3/h	300	410	580	720
Noise dB(A)	52	59	66	70

Black Glass 900 mm €729

White Glass 900 mm €749

## Jolie

FAJO80BG - 800 mm

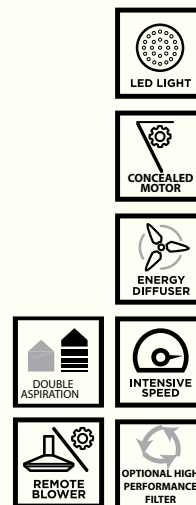

Finish: Glass    Dishwasher Safe Filters  
Electronic Backlit Controls    2 x LED lights  
Width: 800 mm    Energy: C rated

Speed	1	2	3	INT
Air m3/h	280	400	480	520
Noise dB(A)	57	63	68	69

800 mm €749

All extraction rates and noise levels reported are in accordance with IEC standards.

The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECD **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591



**Black Tie**  
FABT90BG - 800 mm




Finish: Glass  
Touch Controls  
Width: 800 mm


Dishwasher Safe Filters  
2 x LED light  
Energy: A+ rated

Speed	1	2	3	4	INT
Air m3/h	200	390	500	620	700
Noise dB(A)	43	57	62	67	69

900 mm €999

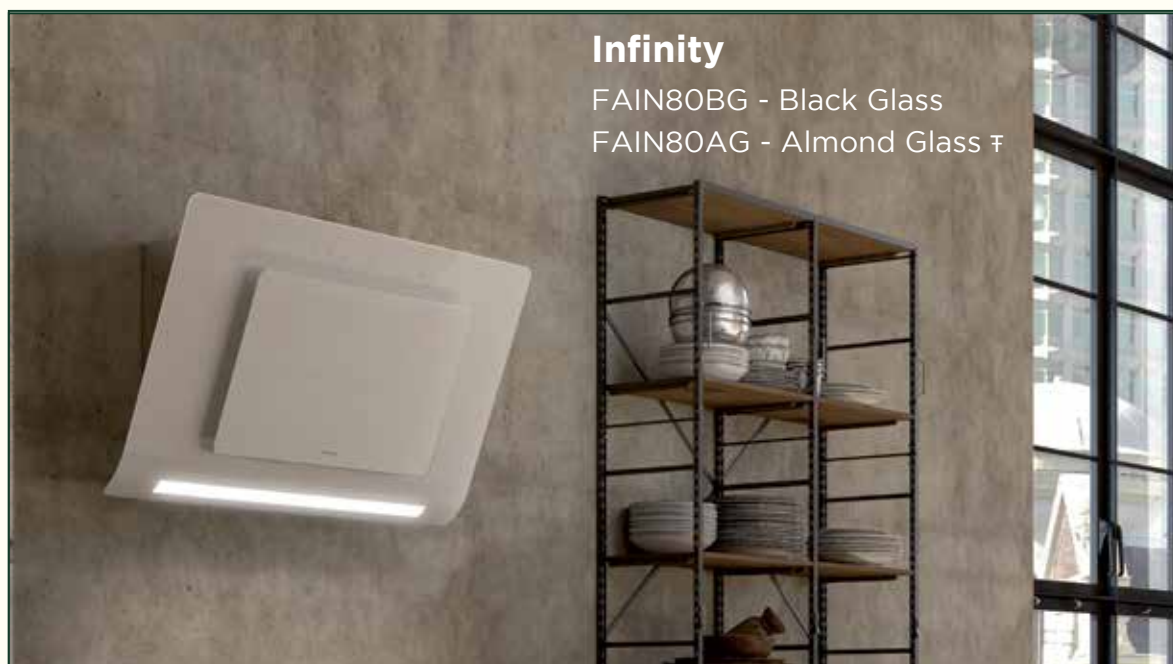

**Infinity**  
FAIN80BG - Black Glass  
FAIN80AG - Almond Glass †

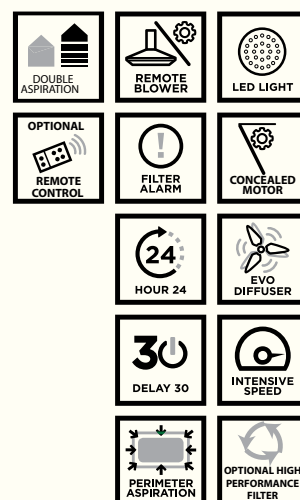

Finish: Glass  
EVO Touch Controls  
Width: 800 mm

Dishwasher Safe Filters  
LED bar light  
Energy: A rated

Speed	1	2	3	INT
Air m3/h	300	420	590	720
Noise dB(A)	52	60	67	71

Black Glass €1,089

Almond Glass €1,089

All extraction rates and noise levels reported are in accordance with IEC standards.  
The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECEC **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591

All retail prices include VAT at 23%  
For technical information log onto [www.fff.ie](http://www.fff.ie)

† = Lead times apply for these models of up to 6 Weeks

Subject to technical modifications and changes to the range without notice





CONNECTION

PERIMETER ASPIRATION

DELAY 30

LED LIGHT

HOUR 24

EVO DIFFUSER

FILTER ALARM

INTENSIVE SPEED

OPTIONAL  
REMOTE CONTROL

Finish: See table Below	Dishwasher Safe Filters	Speed	1	2	3	INT
Electronic LED	LED light	Air m3/h	300	420	590	700
Width: 700 mm	Energy: A rated	Noise dB(A)	51	59	66	69

Old Copper / Old Brass / Old Metal €1,099

Cast Iron €1,199

FACH70OC  
Old Copper ₺



FACH70OB  
Old Brass ₺



FACH70OM  
Old Metal ₺



FACH70CI  
Cast Iron ₺



Rear Outlet Kit  
(Optional) ₺







# Veil

FAVL90\*\* - 900 mm  $\mp$



Finish: See Table Below  
Electronic Controls  
Width: 900 mm

Dishwasher Safe Filters  
2 x LED lights  
Energy: A+ rated

Speed	1	2	3	INT
Air m3/h	300	410	570	700
Noise dB(A)	50	58	65	69

Concrete / Tibetan Silver €1,329

Matt White / Matt Black €999


FAVL90BK  
Matt Black  $\mp$



FAVL90TS  
Tibetan Silver  $\mp$



FAVL90WH  
Matt White  $\mp$

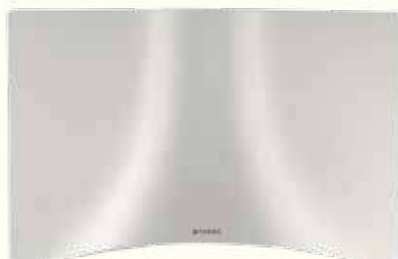

FAVL90CON  
Concrete  $\mp$



All extraction rates and noise levels reported are in accordance with IEC standards.  
The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECD **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591

All retail prices include VAT at 23%  
For technical information log onto [www.fff.ie](http://www.fff.ie)

$\mp$  = Lead times apply for these models of up to 6 Weeks

Subject to technical modifications and changes to the range without notice



- LED LIGHT
- CONCEALED MOTOR
- OPTIONAL REMOTE CONTROL
- NAUTILUS
- DOUBLE ASPIRATION
- INTENSIVE SPEED
- PERIMETER ASPIRATION
- OPTIONAL HIGH PERFORMANCE FILTER

Finish: Dark Concrete	Dishwasher Safe Filters	Speed	1	2	3	INT
Squarcle Controls	2 x LED lights	Air m3/h	260	385	445	530
Width: 800 mm	Energy: A rated	Noise dB(A)	55	64	68	69

Dark Concrete €1,549



- LED LIGHT
- CONCEALED MOTOR
- OPTIONAL REMOTE CONTROL
- NAUTILUS
- DOUBLE ASPIRATION
- INTENSIVE SPEED
- PERIMETER ASPIRATION
- OPTIONAL HIGH PERFORMANCE FILTER

Finish: Copper	Dishwasher Safe Filters	Speed	1	2	3	INT
Squarcle Controls	2 x LED lights	Air m3/h	260	385	445	530
Width: 800 mm	Energy: A rated	Noise dB(A)	55	64	68	69

Copper €1,549

All extraction rates and noise levels reported are in accordance with IEC standards.  
The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECD **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591



## Downdraft and Hob Collection

A range of downdraft hoods and induction cooking hobs that can control numerous hoods via wireless connection

## Hoo-B Glass Downdraft

FAHO52BG



**NEW**

Finish: Glass

Electronic Touch Controls

Depth: 520 mm

Dishwasher Safe Filters

Min 600 mm worktop

Energy: A+ Rated

Speed	1	2	3	INT
Air m3/h	415	480	540	600
Noise dB(A)	62	64	68	70

Black Glass €1,499

## Hoo-B Glass / Alu Downdraft

FAHO52BGA



**NEW**

Finish: Glass/Aluminium Frame

Electronic Touch Controls

Depth: 520 mm

Dishwasher Safe Filters

Min 600 mm worktop

Energy: A+ Rated

Speed	1	2	3	INT
Air m3/h	415	480	540	600
Noise dB(A)	62	64	68	70

Black Glass / Aluminium €1,499

## Induction Hob FCH32

FAPI290G



**NEW**

Finish: Glass

Touch Controls

Width: 290 mm

9 Power Levels

Timer 1-99 min

Booster

Min-Max pan size: 110-225.

Energy: 3700W

Auto Switch off

Over Heat Protection

Auto Shutdown Protection

Power On Indicator

Black Glass €559

## Induction Hob FCH32C Alu Frame

FAPI290GA



**NEW**

Finish: Glass/Aluminium

Touch Controls

Width: 290 mm

9 Power Levels

Timer 1-99 min

Booster

Min-Max pan size: 110-225.

Energy: 3700W

Auto Switch off

Over Heat Protection

Auto Shutdown Protection

Power On Indicator

Black Glass / Aluminium €619

All extraction rates and noise levels reported are in accordance with IEC standards.

The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECD **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591



## Induction Hob FCH64

FAP1580G



**NEW**



Finish: Glass  
Touch Controls  
Width: 580 mm  
9 Power Levels  
Timer 1-99 min  
Booster

Min-Max pan size: 110-225.  
Energy: 7400W  
Auto Switch off  
Over Heat Protection  
Auto Shutdown Protection  
Power On Indicator

Black Glass €929



## Hoo-B plus FCH32 combinations



### 4 Ring Induction 670 Width

- 2 x Induction Hob FCH32C
- 1 x Hoo-B Aluminium downdraft



### 6 Ring Induction 1050 Width

- 3 x Induction Hob FCH32C
- 2 x Hoo-B Aluminium downdraft

All extraction rates and noise levels reported are in accordance with IEC standards.  
The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECEC **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591

All retail prices include VAT at 23%  
For technical information log onto [www.fff.ie](http://www.fff.ie)

⌘ = Lead times apply for these models of up to 6 Weeks

Subject to technical modifications and changes to the range without notice



Fabula  
FAFA90BG

- REMOTE BLOWER
- LED LIGHT
- FILTER ALARM
- OPTIONAL REMOTE CONTROL
- 24 HOUR 24
- EVO DIFFUSER
- 30 DELAY 30
- INTENSIVE SPEED
- PERIMETER ASPIRATION
- OPTIONAL HIGH PERFORMANCE FILTER

Finish: Glass/Stainless Steel	Dishwasher Safe Filters	Speed	1	2	3	4	INT
EVO Touch Controls	LED Light	Air m3/h	160	290	350	439	700
Width: 900 mm	Energy: C Rated	Noise dB(A)	40	53	54	60	70

Black Glass €1549

Induction Hob FCH93  
FAPI90G †



- CONNECTION
- TIMER
- BOOSTER


NEW

Finish: Glass  
Touch Controls  
Width: 900 x 350 mm  
9 Power Levels  
Timer 1-99 min  
Booster

Min-Max pan size: 110-265  
Energy: 6700W  
Auto Switch off  
Over Heat Protection  
Auto Shutdown Protection  
Power On Indicator

Black Glass €1149

All extraction rates and noise levels reported are in accordance with IEC standards.  
The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECD **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591

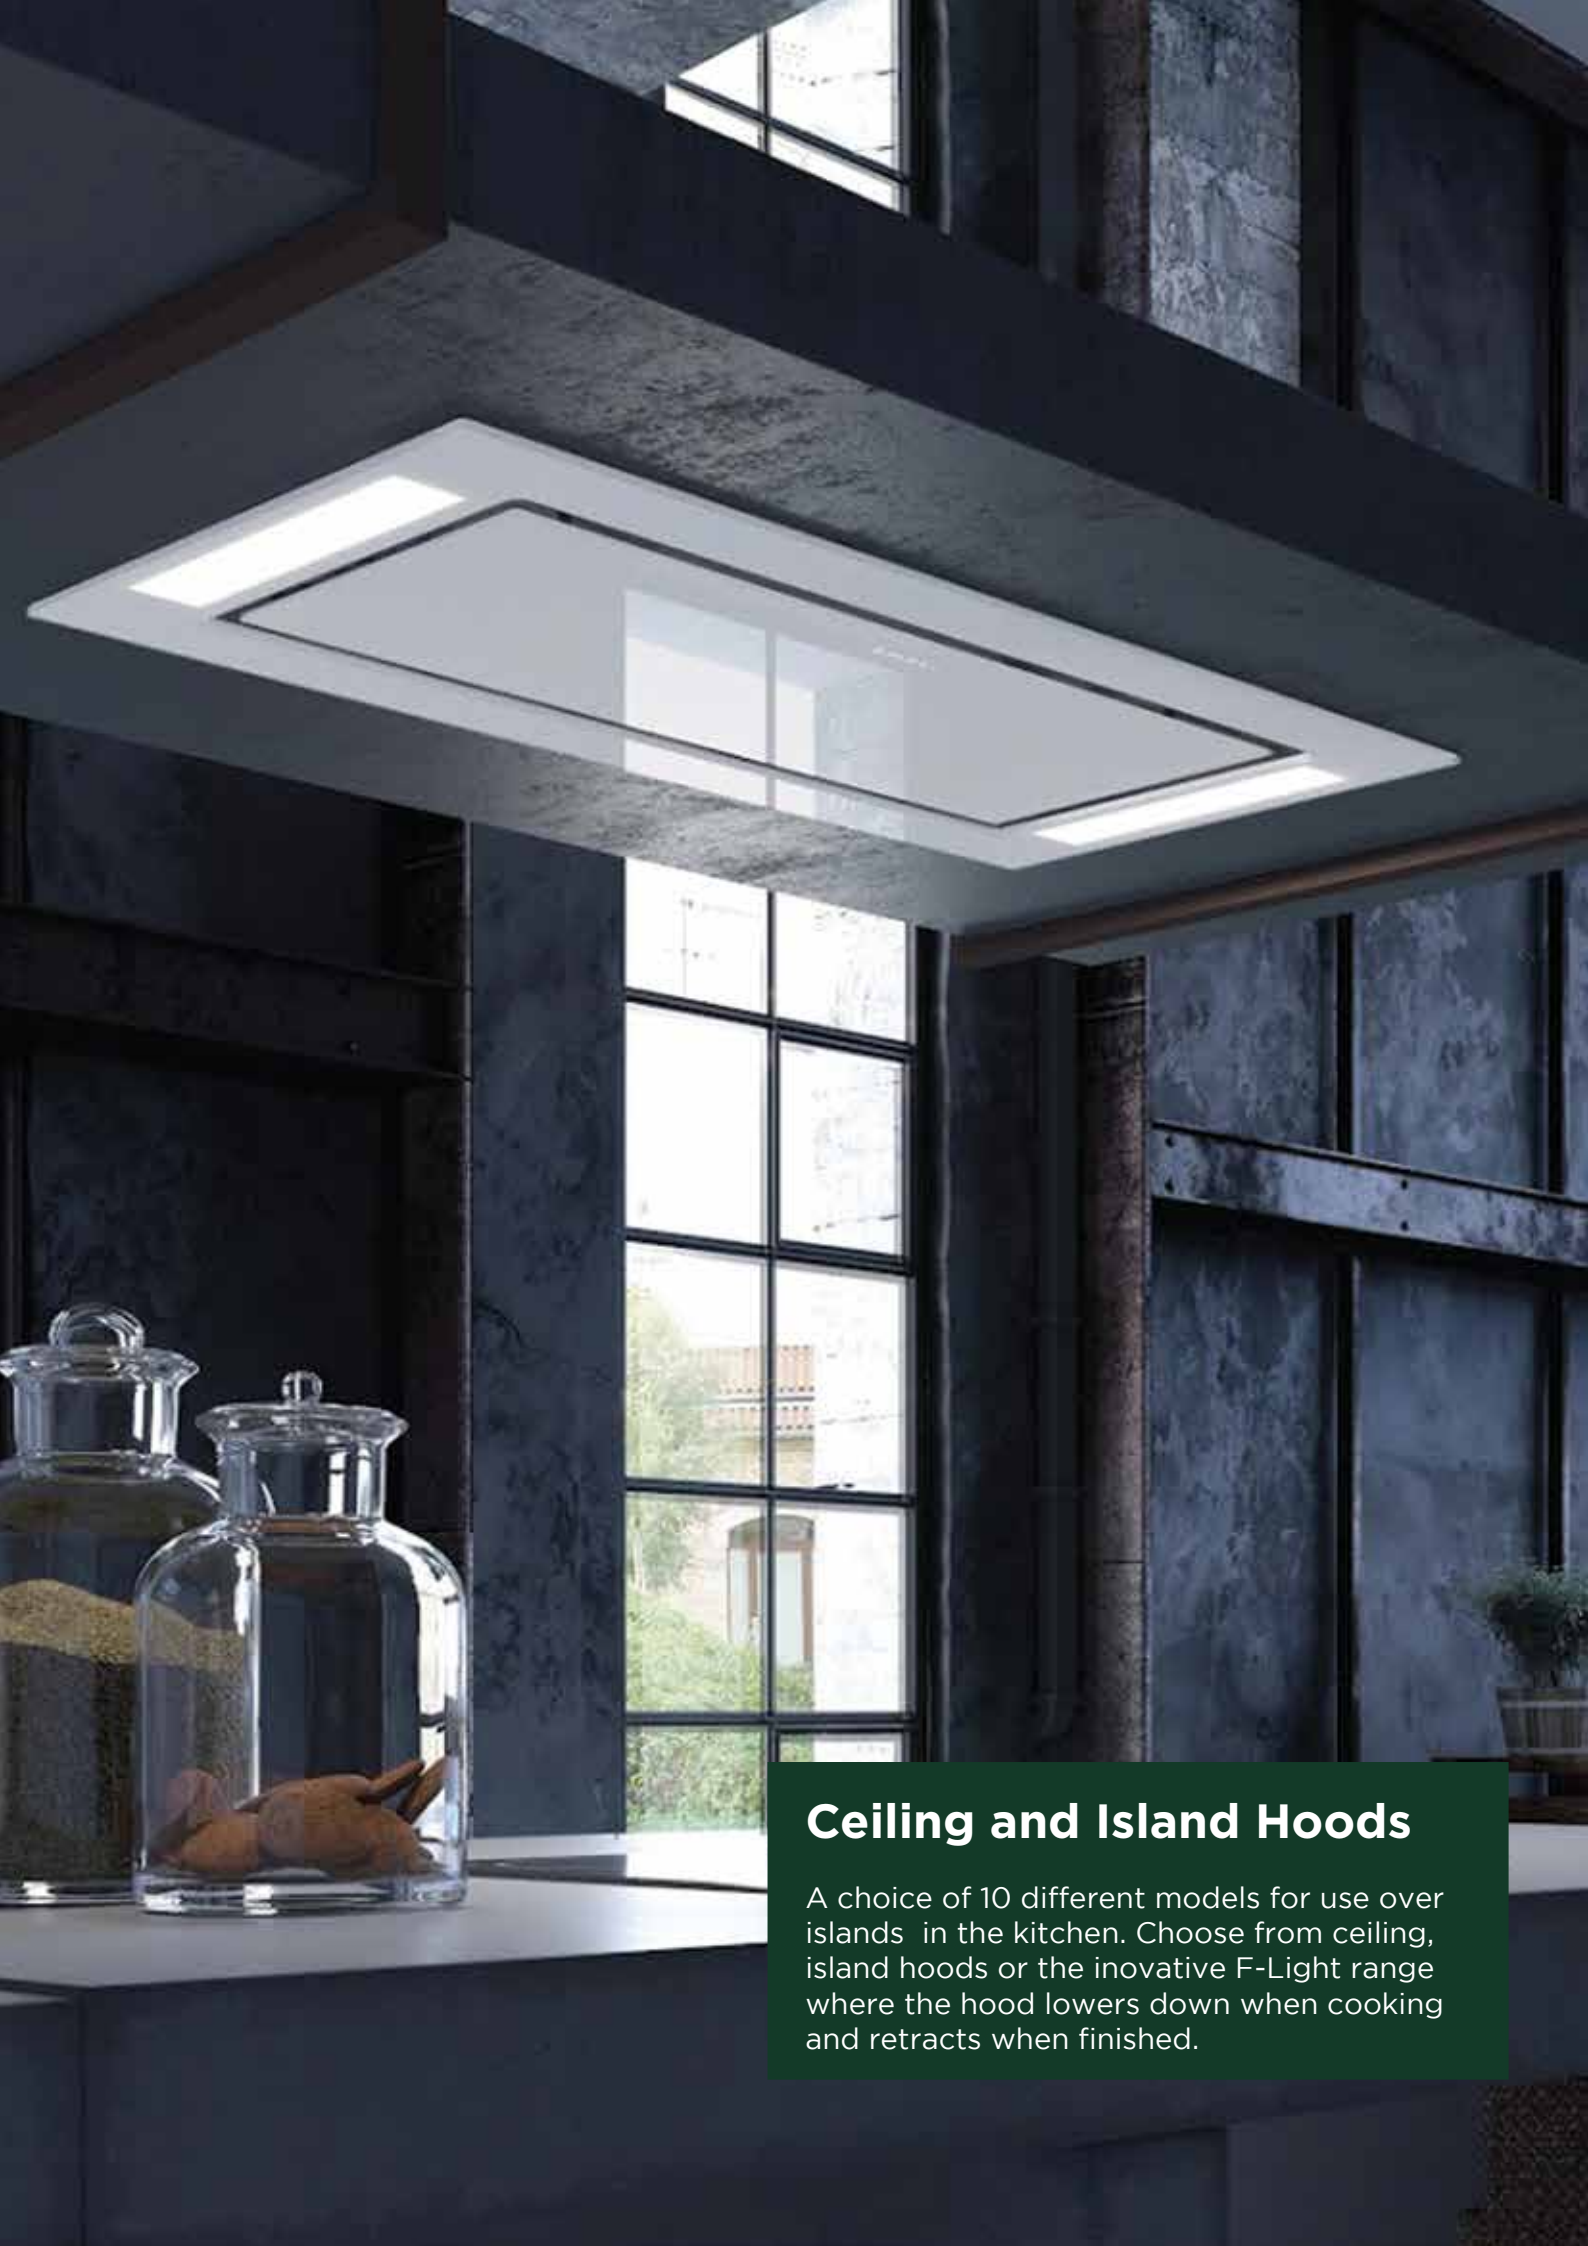

## Ceiling and Island Hoods

A choice of 10 different models for use over islands in the kitchen. Choose from ceiling, island hoods or the innovative F-Light range where the hood lowers down when cooking and retracts when finished.





REMOTE BLOWER

REMOTE CONTROL

LED LIGHT

24 HOUR 24

FILTER ALARM

DELAY 30

EVO DIFFUSER

CONNECTION

INTENSIVE SPEED

PERIMETER ASPIRATION

OPTIONAL HIGH PERFORMANCE FILTER

Finish: White Glass

Dishwasher Safe Filters

Electronic LED Touch Controls

LED lights

Width: 900 mm

Energy: A rated

Speed	1	2	3	INT
Air m3/h	290	400	560	700
Noise dB(A)	53	62	70	70



### Heaven 2.0 Glass

FAHE90WG

### Heaven 2.0

FAHE90SS - 900 mm

FAHE120SS - 1200 mm †

Stainless Steel 900 mm €999


Stainless Steel 1200 mm €1,059

White Glass 900 mm €1,389

All extraction rates and noise levels reported are in accordance with IEC standards.  
The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECEC **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591



## Heaven 2.0 Flat

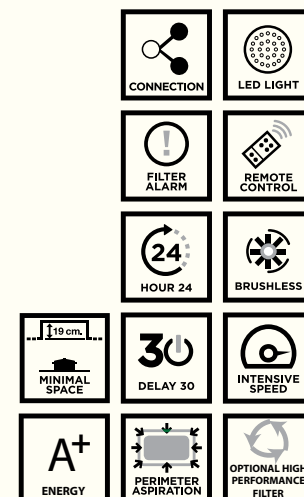

Finish: White Glass  
Electronic LED Touch Controls  
Width: 900 mm

Dishwasher Safe Filters  
LED lights  
Energy: A+ rated

Speed	1	2	3	INT
Air m3/h	480	550	620	700
Noise dB(A)	63	66	70	72

## Heaven 2.0 Flat Glass

FAHEF90WG



## Heaven 2.0 Flat

FAHEF90SS - 900 mm  
FAHEF120SS - 1200 mm †



Stainless Steel 900 mm €1,079

Stainless Steel 1200 mm €1,149

White Glass 900 mm €1,479

All extraction rates and noise levels reported are in accordance with IEC standards.  
The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECEC **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591

All retail prices include VAT at 23%  
For technical information log onto [www.fff.ie](http://www.fff.ie)

† = Lead times apply for these models of up to 6 Weeks

Subject to technical modifications and changes to the range without notice



CONNECTION

LED LIGHT

FILTER ALARM

REMOTE CONTROL

HOUR 24

BRUSHLESS

MINIMAL SPACE

DELAY 30

INTENSIVE SPEED

A+ ENERGY

PERIMETER ASPIRATION

MINIMAL SPACE

Finish: White Glass	Dishwasher Safe Filters	Speed	1	2	3	INT
Electronic LED Touch Controls	Perimeter LED light	Air m3/h	415	490	550	710
Width: 910 mm	Energy: A+ rated	Noise dB(A)	63	65	68	71

High-Light

FAHI91SS - 910 mm ₣

FAHI121SS - 1210 mm ₣

High-Light White

FAHI91WG - 910 mm ₣

Stainless Steel 910 mm €1,449	Stainless Steel 1210 mm €1,549	White Matt 910 mm €1,549
-------------------------------	--------------------------------	--------------------------

All extraction rates and noise levels reported are in accordance with IEC standards.  
The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECD **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591

## Heaven Compact

FAHC90SSWG



Min space  
requirement 319 mm

Finish: Stainless Steel/Glass  
Electronic LED Touch Controls  
Width: 900 mm


Dishwasher Safe Filters  
2 x LED lights  
Energy: C rated

Speed	1	2	3	INT
Air m3/h	300	460	580	640
Noise dB(A)	53	63	68	70

Stainless Steel 900 mm €999

## SkyPad 2.0

FASK120SSWG †

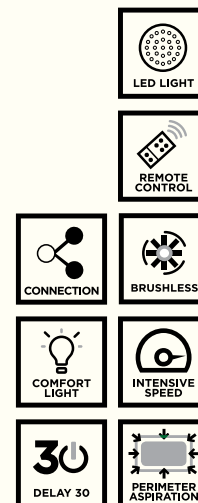

Includes carbon filter  
\* No energy data as  
SkyPad only works in  
recycle mode

Finish: Stainless Steel/Glass  
Electronic Controls  
1200 x 700 mm

Dishwasher Safe Filters  
2 x LED lights  
Energy: N/A

Speed	1	2	3	INT
Air m3/h	440	600	780	850
Noise dB(A)	57	64	70	72

Stainless Steel / White Glass 1,200 mm €1,649

All extraction rates and noise levels reported are in accordance with IEC standards.  
The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECEC **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591

All retail prices include VAT at 23%  
For technical information log onto [www.fff.ie](http://www.fff.ie)

† = Lead times apply for these  
models of up to 6 Weeks

Subject to technical modifications  
and changes to the range without notice



REMOTE CONTROL

LED LIGHT

24 HOUR 24

UP & DOWN

30 DELAY 30

EVO DIFFUSER

CONNECTION

INTENSIVE SPEED

PERIMETER ASPIRATION

Finish: See Below	Dishwasher Safe Filters	Speed	1	2	3	INT
Electronic Controls	Micro LED lights	Air m3/h	270	340	430	620
Width: Ø 500 mm	Energy: A rated	Noise dB(A)	52	58	64	71



FAPP50SS † - Stainless Steel

FAPP50TS † - Tibetan Silver



Stainless Steel €1,999

Tibetan Silver €2,849

All extraction rates and noise levels reported are in accordance with IEC standards.  
The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECD **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591



## Tratto Island

FATRI90SSG



Finish: Stainless Steel

Electronic Controls

Width: 900 mm

Dishwasher Safe Filters

4 x LED lights

Energy: C rated

Speed	1	2	3	INT
Air m3/h	300	480	620	700
Noise dB(A)	54	64	69	71

Stainless Steel 900 mm €799

## Stilo Island

FASAI90SS



Finish: Stainless Steel/Glass

Electronic Controls

1200 x 700 mm

Dishwasher Safe Filters

4 x LED lights

Energy: C rated

Speed	1	2	3	INT
Air m3/h	300	460	620	700
Noise dB(A)	52	62	69	71

Stainless Steel 900 mm €949

All extraction rates and noise levels reported are in accordance with IEC standards.

The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECEC **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591


All retail prices include VAT at 23%  
For technical information log onto [www.fff.ie](http://www.fff.ie)

⌘ = Lead times apply for these  
models of up to 6 Weeks

Subject to technical modifications  
and changes to the range without notice

## T Light Island

FATLI100SS †

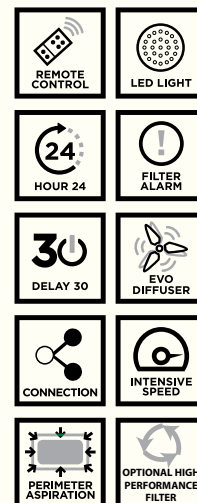

Finish: Stainless Steel  
Soft Touch Controls  
Width: 1000 mm


Dishwasher Safe Filters  
Perimeter LED lights  
Energy: A rated

Speed	1	2	3	INT
Air m3/h	290	420	580	690
Noise dB(A)	50	58	65	68

Stainless Steel 1000 mm €1,299

## Vanilla

FAVA52SSWG †

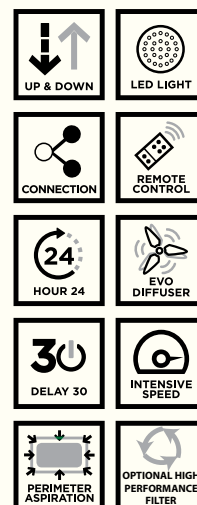

Finish: Stainless Steel  
Electronic Touch Controls  
Width: 520 mm diameter

Dishwasher Safe Filters  
6 x Micro LED Lights  
Energy: A rated

Speed	1	2	3	INT
Air m3/h	270	340	430	620
Noise dB(A)	49	60	65	68


520 mm €1,899

All extraction rates and noise levels reported are in accordance with IEC standards.

The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECD **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591

## Kaleidos Plus

FAKA60SSBF †

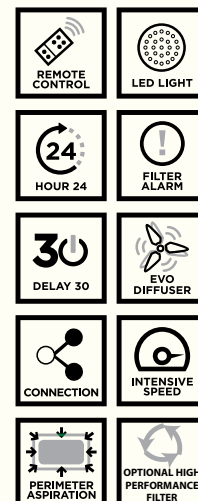

Finish: Stainless Steel/Fabric Dishwasher Safe Filters  
Electronic Touch Controls 6 x Micro LED Lights  
Width: 600 mm diameter Energy: A rated

Speed	1	2	3	INT
Air m3/h	270	340	430	620
Noise dB(A)	52	58	64	71

600 mm €2,199

## Lybra Plus

FALY40SSG †



Finish: Stainless Steel Dishwasher Safe Filters  
Electronic Touch Controls 2 LED lights  
Width: 409 x 409 mm Energy: A rated

Speed	1	2	3	INT
Air m3/h	270	340	430	620
Noise dB(A)	52	58	64	71

409 mm €1,699

All extraction rates and noise levels reported are in accordance with IEC standards.  
The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECEC **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591

All retail prices include VAT at 23%  
For technical information log onto [www.fff.ie](http://www.fff.ie)

† = Lead times apply for these models of up to 6 Weeks

Subject to technical modifications and changes to the range without notice






Lybra Plus Limited Edition  
FALY40SSBG ‡

- REMOTE CONTROL
- LED LIGHT
- 24 HOUR 24
- FILTER ALARM
- 30 DELAY 30
- EVO DIFFUSER
- CONNECTION
- INTENSIVE SPEED
- PERIMETER ASPIRATION
- OPTIONAL HIGH PERFORMANCE FILTER

Finish: Stainless Steel/Glass	Dishwasher Safe Filters	Speed	1	2	3	INT
Electronic Touch Controls	2 LED lights	Air m3/h	270	340	430	620
Width: 409 x 409 mm	Energy: A rated	Noise dB(A)	52	58	64	71

600 mm €2,849



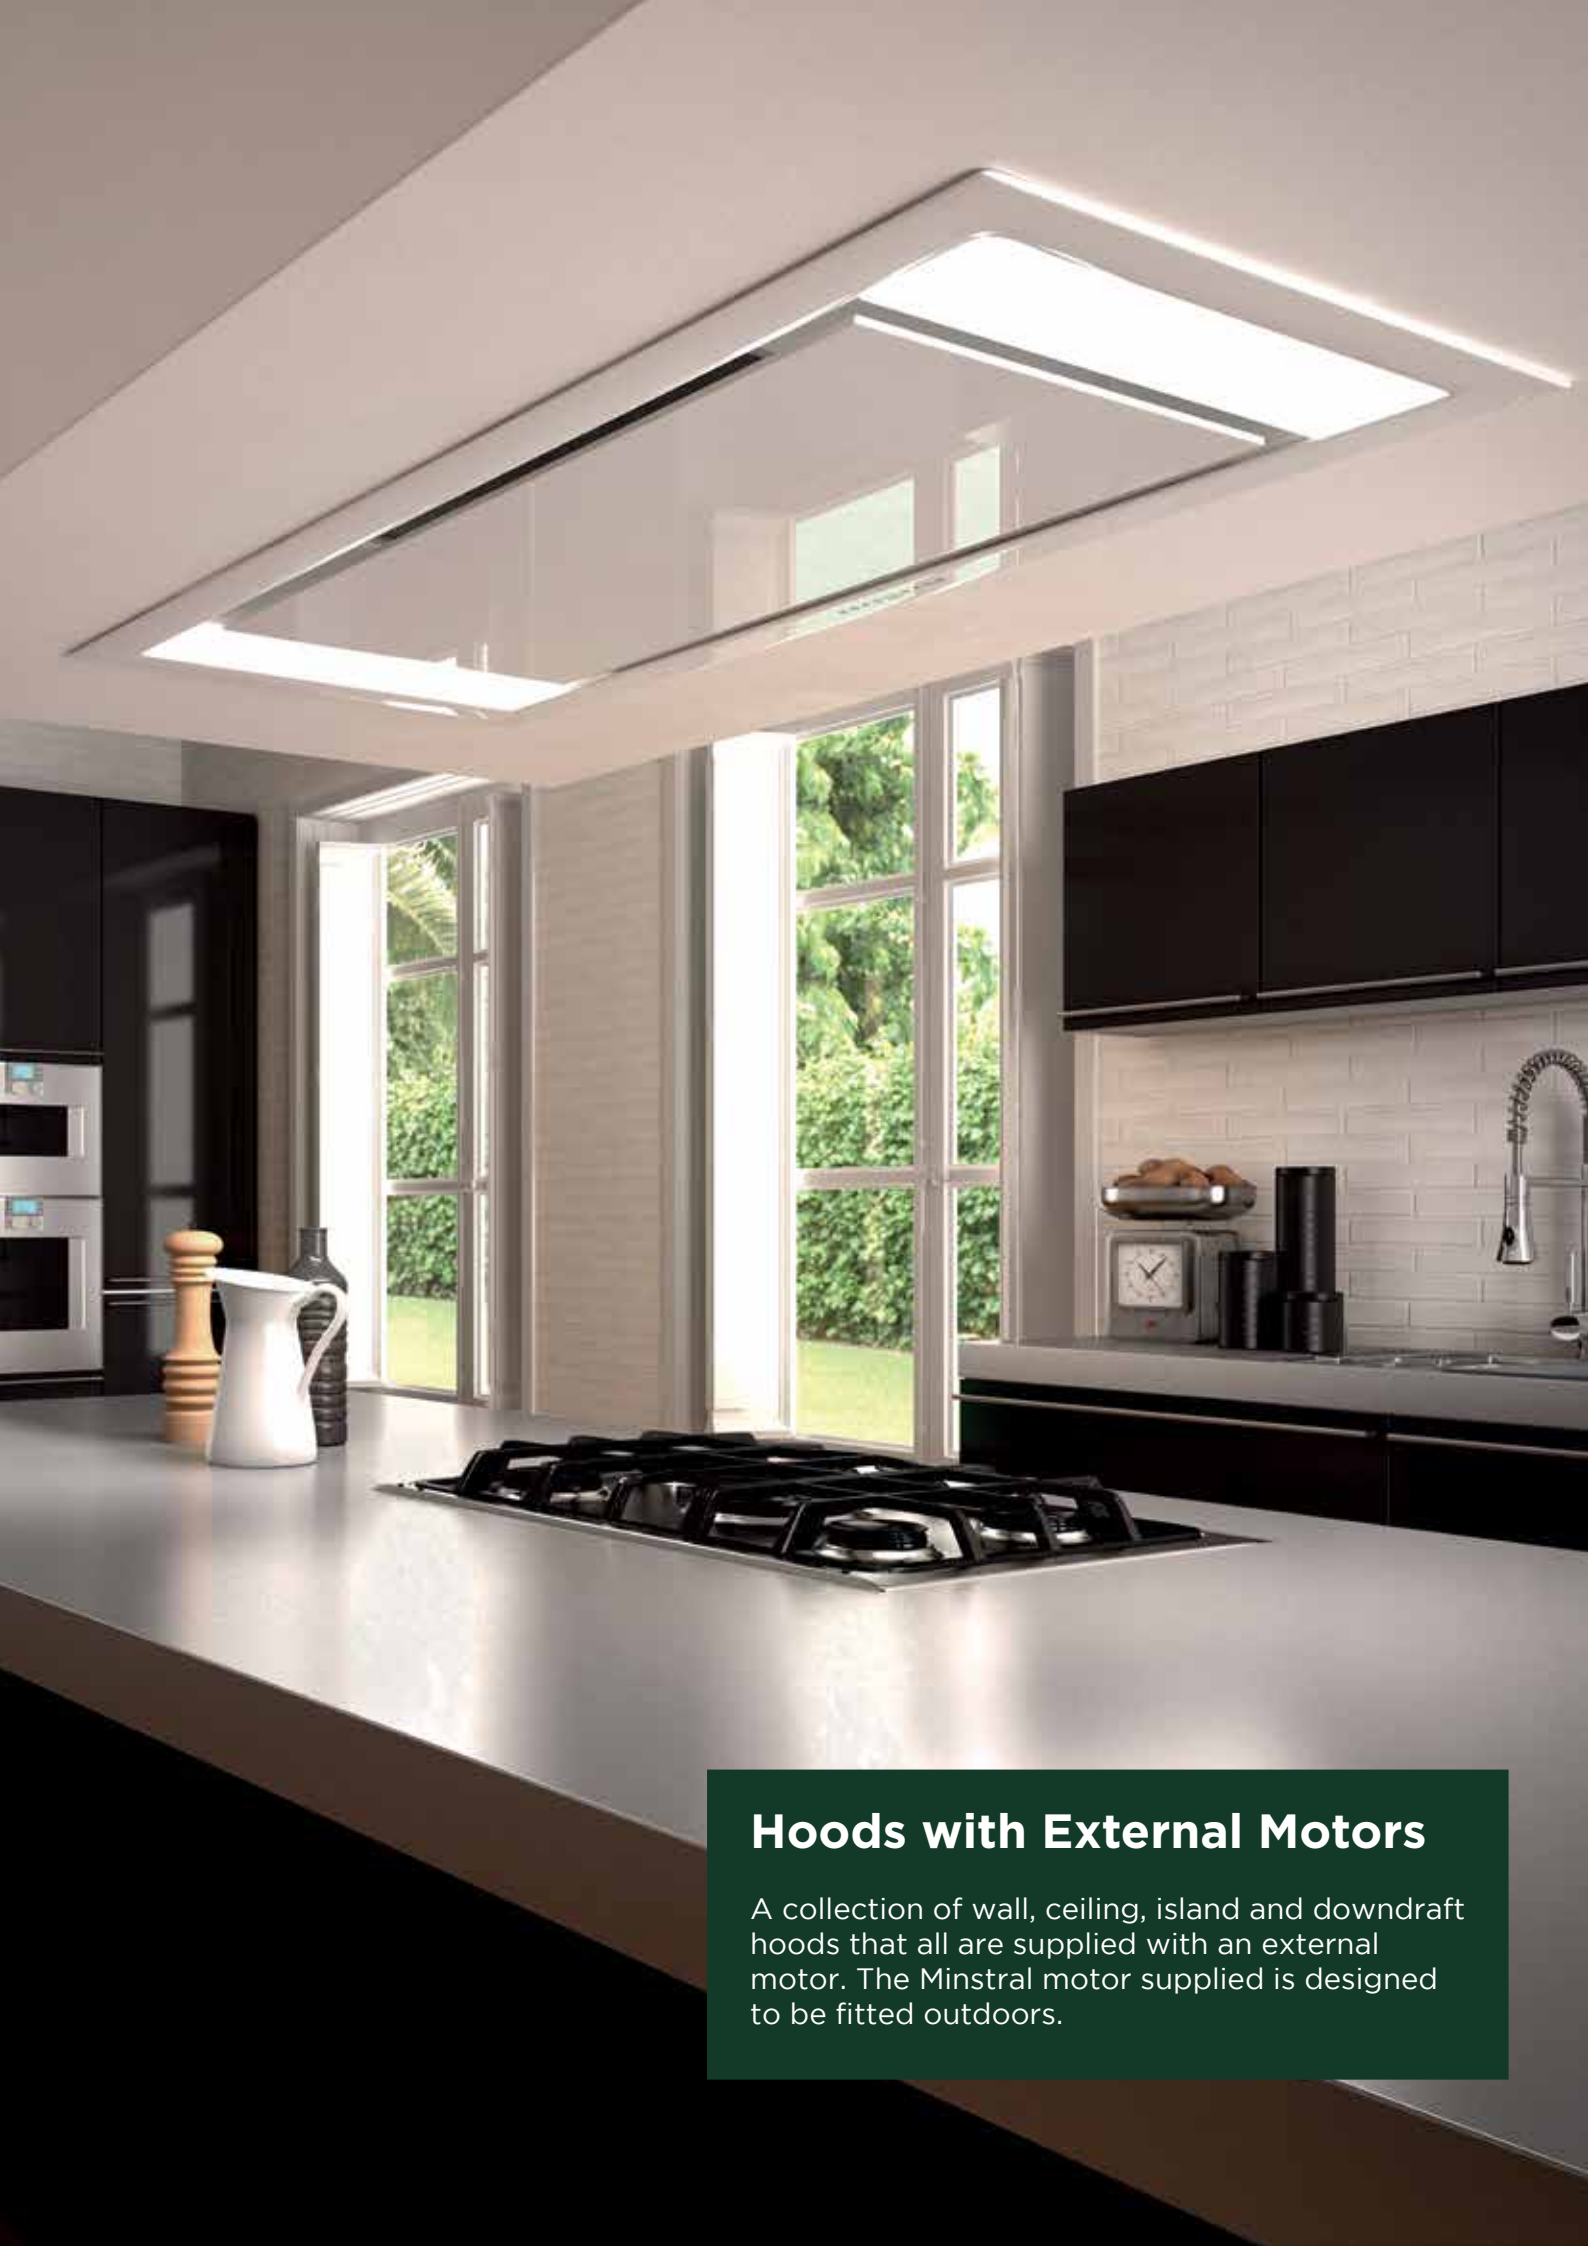


## Hoods with External Motors

A collection of wall, ceiling, island and downdraft hoods that all are supplied with an external motor. The Minstral motor supplied is designed to be fitted outdoors.

## Heaven with External Motor

FAHE90WGEM - White Glass ₣

FAHE90SSEM - Stainless Steel ₣

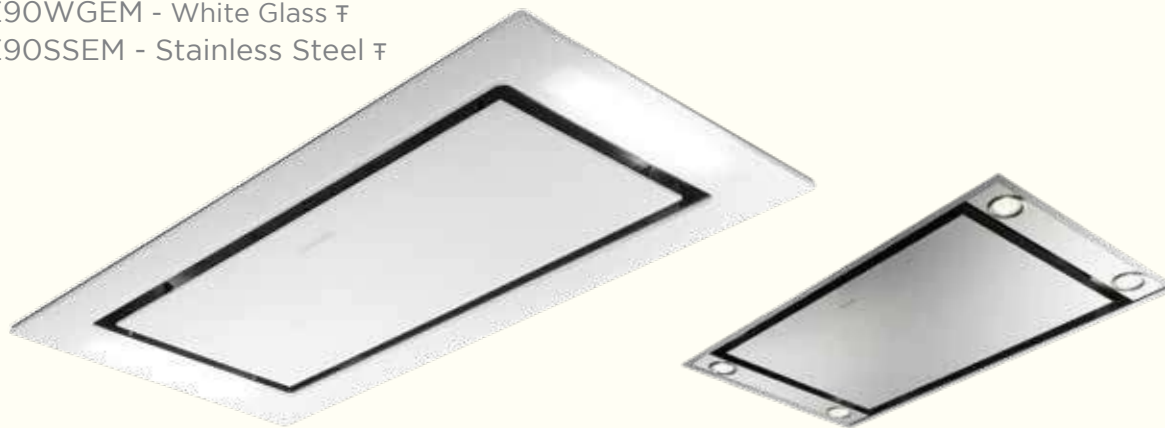

Finish: White Glass / S-Steel

Electronic LED Controls

Width: 900 mm

Dishwasher Safe Filters

4 x LED lights


Energy: B rated

Includes remote external motor

Speed	1	2	3	INT
Air m3/h	230	340	390	650
Noise dB(A)	54	57	59	71

Stainless Steel 900 mm €1,549

White Glass 900 mm €1,949

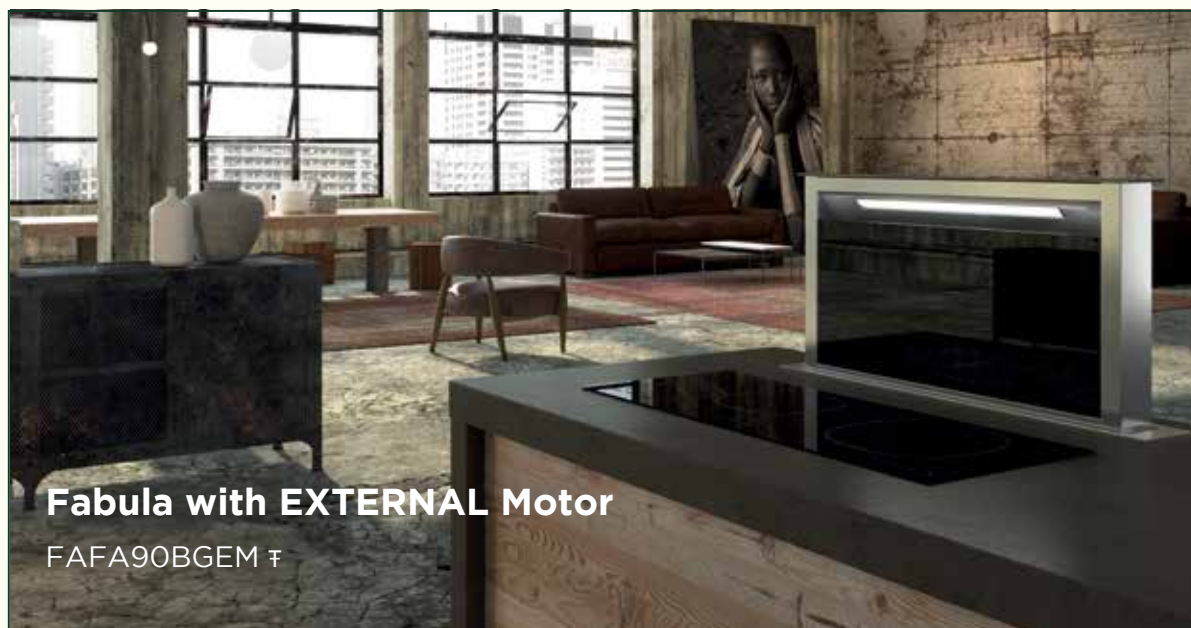

## Fabula with EXTERNAL Motor

FAFA90BGEM ₣



Includes remote external motor

Finish: Glass/Stainless Steel

EVO Touch Controls

Width: 900 mm

Dishwasher Safe Filters

LED Light

Energy: B Rated

Speed	1	2	3	INT
Air m3/h	280	370	440	530
Noise dB(A)	55	64	67	69

900mm €2,199

All extraction rates and noise levels reported are in accordance with IEC standards.

The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECD **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591

## Jolie with External Motor

FAJO80BGEM - 800 mm ƒ



Finish: Glass      Dishwasher Safe Filters  
LED Electronic Controls      2 x LED lights  
Width: 800 mm      Energy: B rated

Speed	1	2	3	INT
Air m3/h	280	370	440	530
Noise dB(A)	55	64	67	69

Black Glass €1,379

## Ray with External Motor

FARA90SSEM - 900 mm ƒ



Finish: Glass/Stainless Steel      Dishwasher Safe Filters  
LED Electronic Controls      2 x LED Lights  
Width: 900 mm      Energy: B rated

Speed	1	2	3	INT
Air m3/h	290	390	455	540
Noise dB(A)	54	58	62	67

900 mm €999

## Stilo with External Motor

FASE90SSEM - 900 mm ƒ



Finish: Stainless Steel      Dishwasher Safe Filters  
LED Electronic Controls      2 x LED lights  
Width: 900 mm      Energy: B rated

Speed	1	2	3	INT
Air m3/h	290	390	455	540
Noise dB(A)	54	58	62	67

900 mm €1,059

## Stilo Island with External Motor

FASAI90SSEM - 900 mm ƒ



Finish: Stainless Steel      Dishwasher Safe Filters  
LED Electronic Controls      4 x LED lights  
Width: 900 mm      Energy: B rated

Speed	1	2	3	INT
Air m3/h	290	390	455	540
Noise dB(A)	54	58	62	67

900 mm €1,449

All extraction rates and noise levels reported are in accordance with IEC standards.

The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECEC **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/ EN 61591

All retail prices include VAT at 23%  
For technical information log onto [www.fff.ie](http://www.fff.ie)

ƒ = Lead times apply for these  
models of up to 6 Weeks

Subject to technical modifications  
and changes to the range without notice

Please note that all extraction rates and noise levels reported are in accordance with IEC standards. The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECED Code of Conduct. The CECED Code establishes clear rules of measurement common to all cooker hood manufacturers IEC/EN 61591. Please ensure that any cooker hoods you make look at comply with the code of conduct to make an accurate comparison.











## Ducting Kits

In order to achieve the highest extraction rates a ducting kit should be used. Extraction rates will drop and noise levels will change when the hood is used in recycle mode with filters. All hoods in this brochure can be vented or used in a recycle mode.

Ducting Code	Description	RRP
F02DK120	2 mtr. 120 mm Ø Flexible ducting, External Vent White, 2 x fixing clips	€18

## Charcoal Filters - Standard

Where venting is not possible, use of charcoal filters allows the air to be recycled. Charcoal filters reduce extraction rate by 40% and last up to 3 months. Charcoal filters are available to suit whichever cooker hood you choose. To order replacement filters simply call us on + 353 1 844 8400

Filter Code	Cooker Hood	RRP	
F01CF01	Bella, Gemma, Glove, Look, Nice, Ray, Stilo, Stilo Island, Stilux, T-Light, T-Light island, Tratto Island, Victory, Victory 2.0	€33	
F01CF02	Black Tie, Cocktail, Cocktail XS, City, Daisy, Glam Light, Heaven 2.0, Heaven glass, In-Light, Inca Lux, Inca Lux Glass, Infinity, Jolie, Kaleidos, Maxima, Northia, Scrigno, Skypad, Steelmax, Strip, Solaris, Vanilla, Vertigo	€38	
F01CF03	104, 2104, 2108 (Order 2 for twin Motors)	€13	
F01CF04	Inca Plus,	€28	
F01CF05	Omnia	€36	
F01CF08	Flexa, Flexa HIP, Vesta, Inca Smart HC, Inca Smart	€24	
F01CF09	Fabula and Hoo-B Downdraft	€135	
F01CF10	Luft	€65	
F01CF11	Heaven 2.0 Flat 90, Heaven 2.0 Flat Glass 90, High-Light 910	€105	
F01CF12	Heaven 2.0 Flat 120, High-Light 1210	€135	

## Special Filter Holder

The filter holder ensures humidity does not remain in the cabinet

Filter Code	Cooker Hood	RRP	
F01CF13	Fabula and Hoo-B Downdraft including filter, replacement filters F01CF09 in table above	€181	




## Charcoal Filters - High Performance

Several hoods have High performance filters available to suit. These special Charcoal filters only reduce extraction rate by 15% and last up to 6 months..

Filter Code	Cooker Hood	RRP	
F01CF02HP	Black Tie, Cocktail, Cocktail XS, City, Daisy, Glam Light, Heaven 2.0, Heaven glass, In-Light, Inca Lux, Inca Lux Glass, Infinity, Jolie, Kaleidos, Maxima, Northia, Scrigno, Steelmax, Strip, Solaris, Talika, Vanilla, Vertigo	€53	
F01CF04HP	Skypad	€136	


## HFH Filter - Premium Performance

HFH filters only reduce extraction rate by 5% and they can be washed in the dishwasher up to five times.

Filter Code	Cooker Hood	RRP	
F01HFH01	HFH kit including filter for; Bella, Gemma, Look, Nice, Ray, Stilo, Stilux, T-Light, T-Light island,	€270	
F01HFH01R	Replacement filter for HFH kit	€169	

## Hood Cap

For use with hoods in recycle mode without chimney. Deflects exhaled air from hitting the ceiling and prevents dirt from falling into the motor.

Filter Code	Cooker Hood	RRP	
F05HC1	Black Tie, Cocktail, Cocktail XS, City, Daisy, Glam Light, Infinity, Jolie, Northia, Steelmax.	€30	

## Remote Control

Filter Code	Cooker Hood	RRP	
F05RC1	Black Tie, Glam Light, Heaven 2.0, Heaven Flat, High-Light, Hoo-b, In-Light, Inca Lux, Infinity, Kaleidos, Look, Luft, SkyPad, T-Light, T-Light Island, Talika, Vanilla, Vertigo	€65	

## Remote Blower


The ability to install the motor away from the hood frees it from architectural constraints and reduces noise in the kitchen. Motor can be installed up to 7 metres from the hood.

Filter Code	Cooker Hood	RRP	
F10RB01	Bella, City, Daisy, Gemma, Glove, Heaven, Heaven Glass, Inca Lux, Inca Lux Glass, Infinity, Jolie, Maxima, Nice, Ray, Stilo, Stilux, Strip, Tratto island	€215	
F10RB02	Fabula	€159	

## Silent Kit




Reduces the perceived sound by up to 25%\* Washable sound-absorbing cushions which sound proof the hood.

\*Equal to a reduction of 3dB(A) according to norm EN 60704-3.

Code	Cooker Hood	RRP	
F04SK1	Bella, Gemma, Nice, Premio, Ray, Stilo, Stilux, Tratto island,	€115	



## Splashbacks

High Quality Stainless Steel Splashbacks for 60 and 90 cm wide hoods

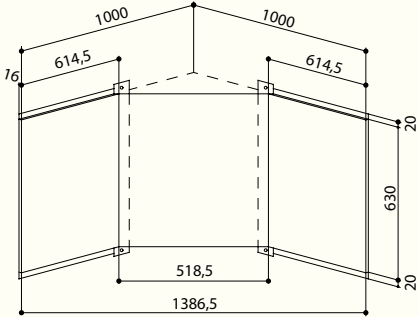
Code	Cooker Hood	RRP	
F06W6063	60 cm Bella, Gemma, Glove, Stilo, Stilux, Strip, Vesta	€75	
F06W9063	90 cm Bella, Gemma, Glove, Look, Stilo, Stilux, Strip, T-Light Vesta	€119	
F06W1001	100 cm Solaris Corner	€269	

## Chimneys


Extra height Chimneys for high ceilings - Lead times of 6 weeks apply

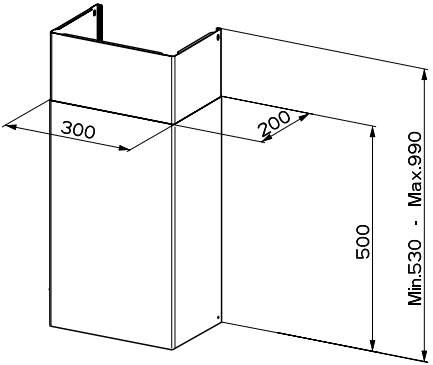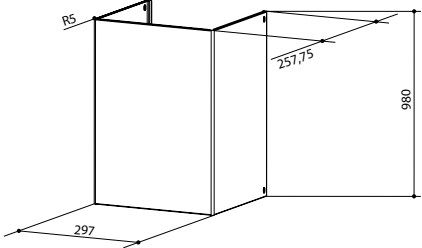Code	Cooker Hood	RRP	
F03W290B	Chimney for Cocktail Black	€65	
F03W846W	Chimney for Cocktail White	€65	
F03W02 ₣	Bella, Gemma, Glove, Look, Nice, Ray Stilo, Stilux	€101	


104/2104

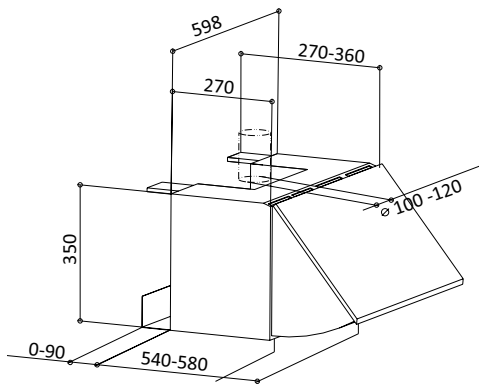


## 2108

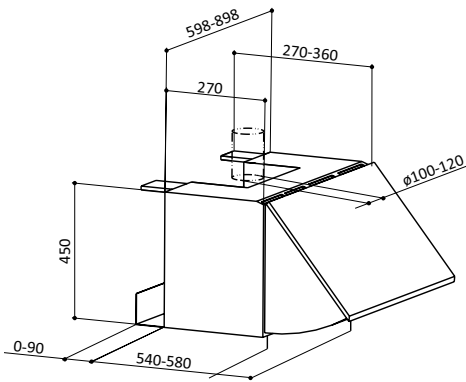


# Scrigno

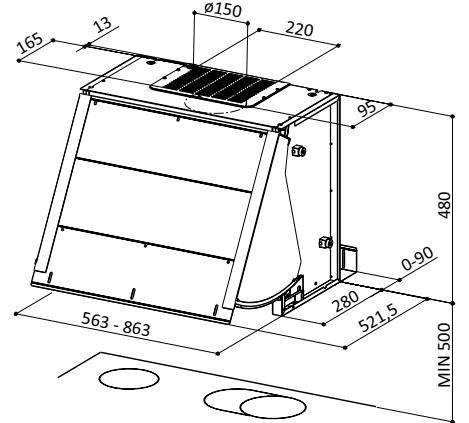


# Flexa

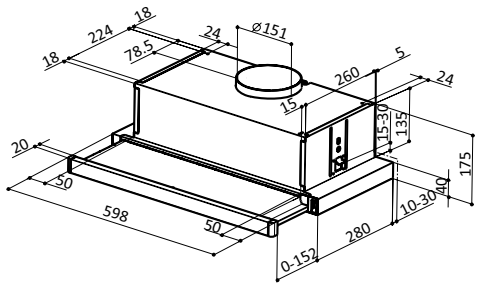


## Flexa Hip

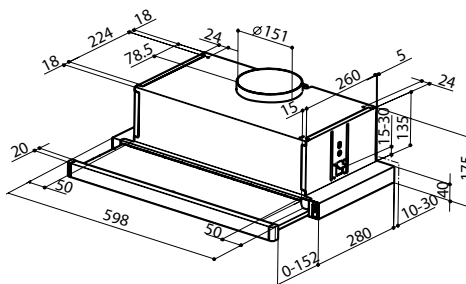


# Omnia

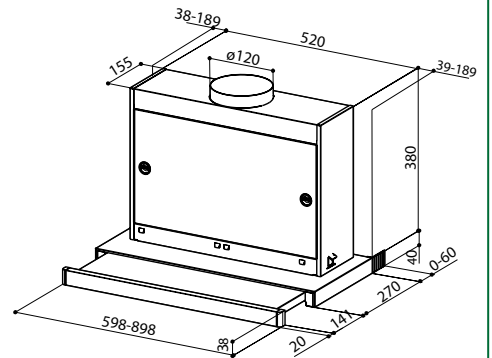


# Maxima

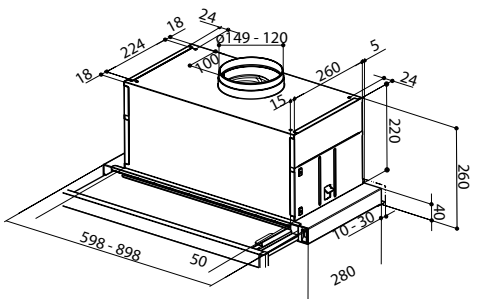

# Inca Smart

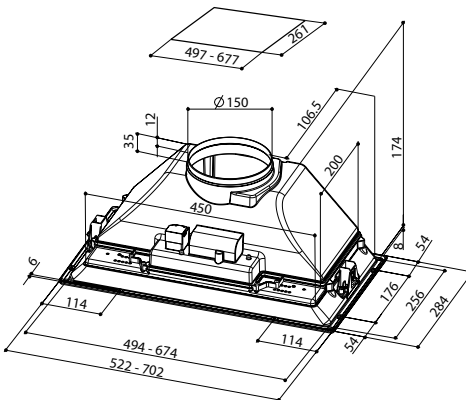


## Inca Smart HC

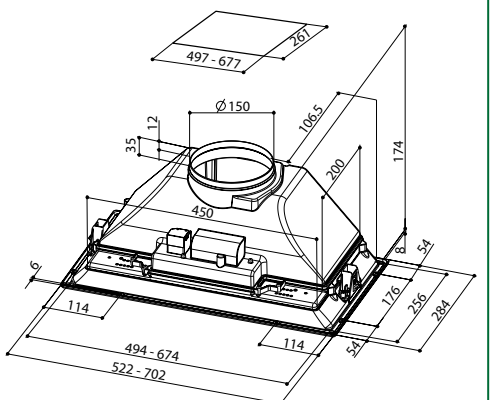





## Inca Plus

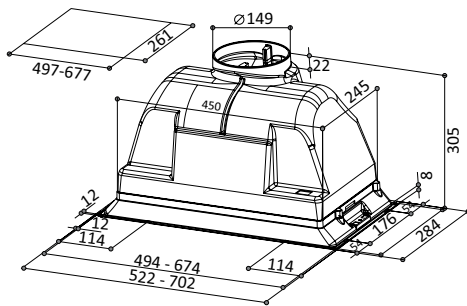


## Inca Lux 2.0

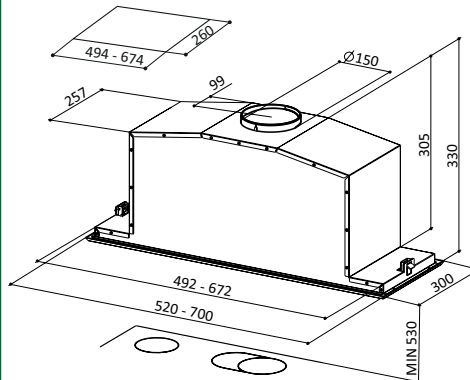


## In-Nova Smart

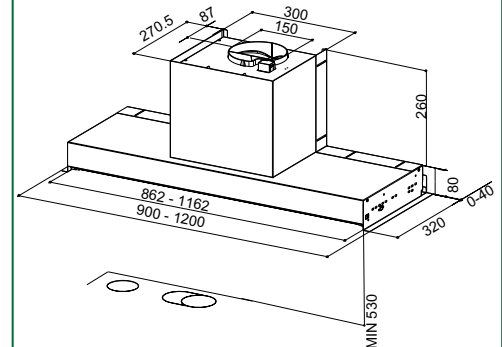


## In-Nova Comfort

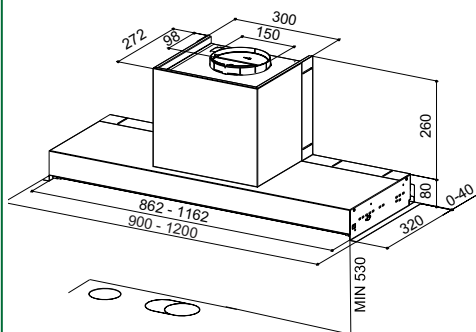


## Inca Lux 2.0 Inca Lux Glass

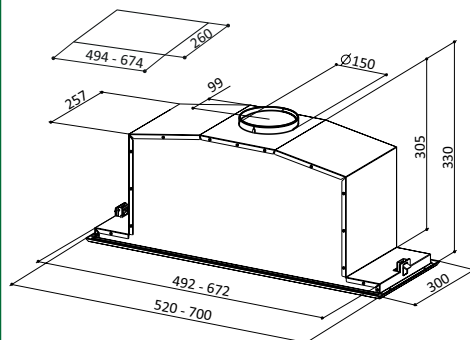


## Victory 2.0

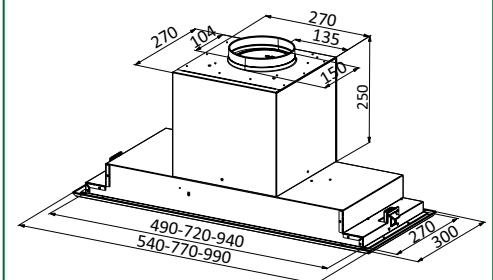


## In-Nova Premium

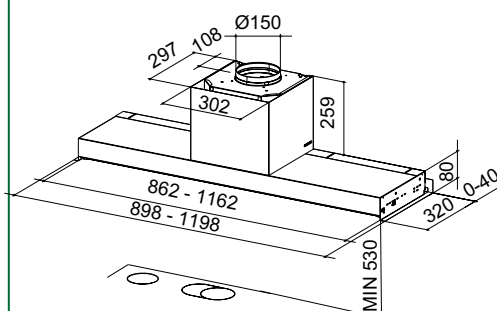


## In-Light

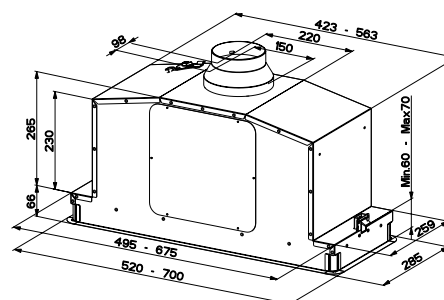


## Swift

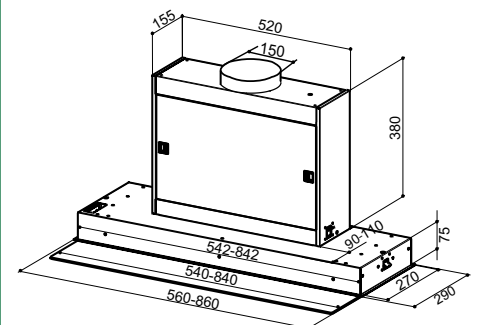


## Vesta

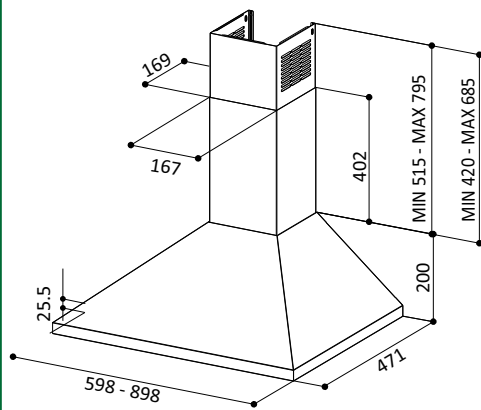


## Strip

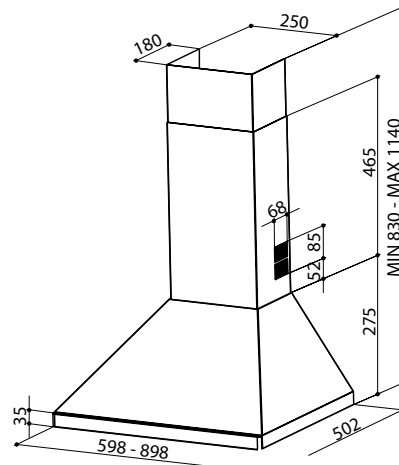


## Gemma

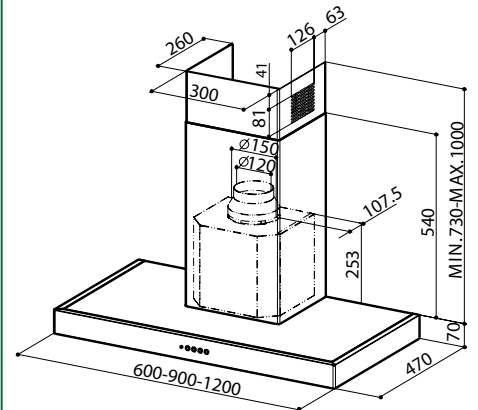


## Ray

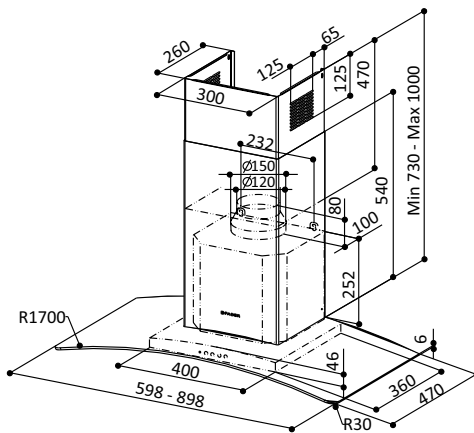


## Nice

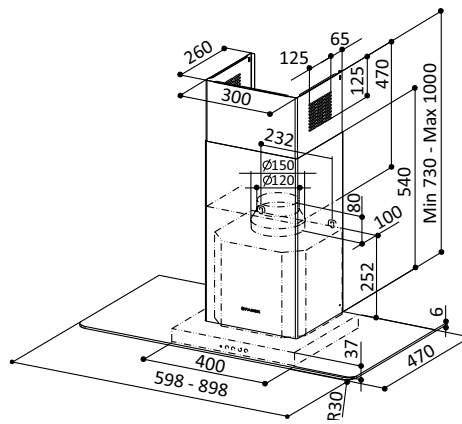


## Stilo

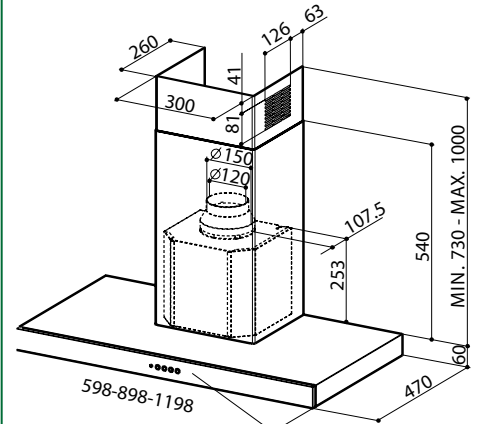


## Glove

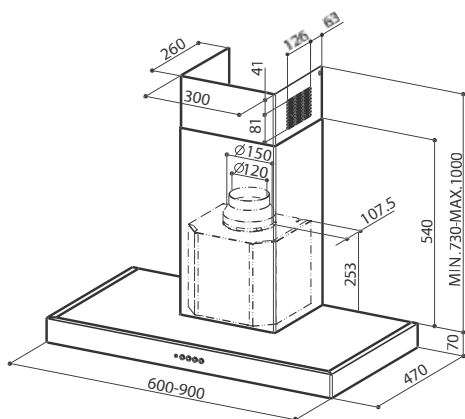


## Bella

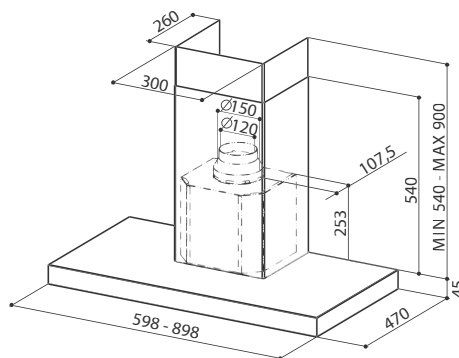


## Stilux

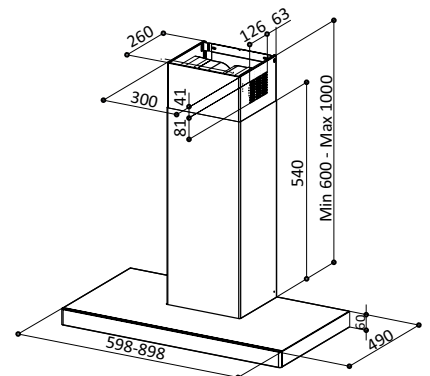


## Look

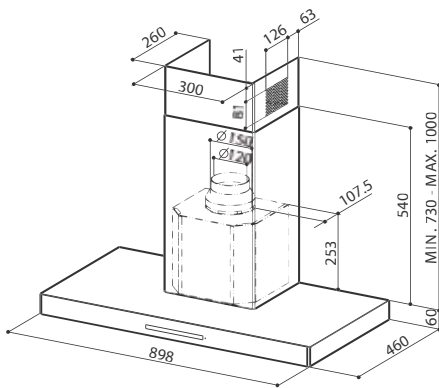


## T-Light

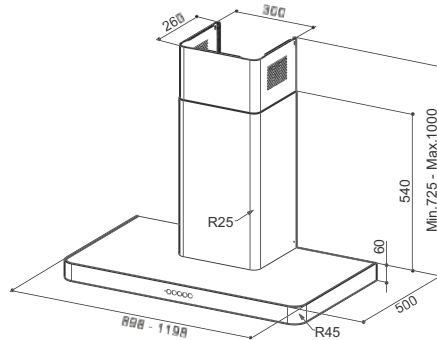


## Solaris

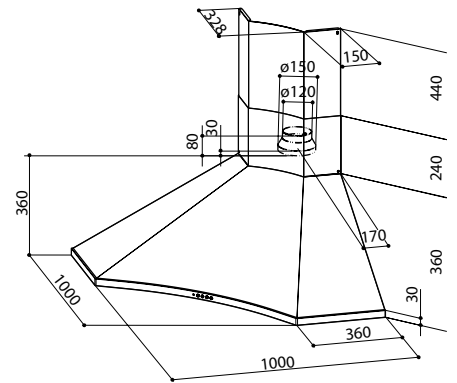


## Tweet

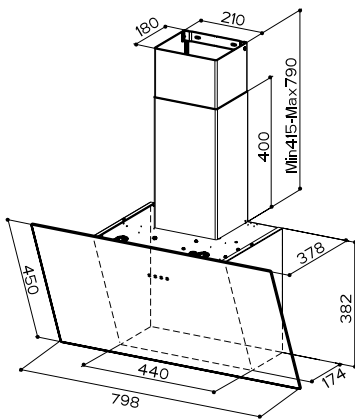


## Daisy

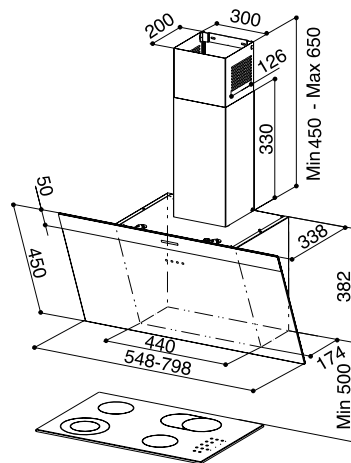


## Steelmax

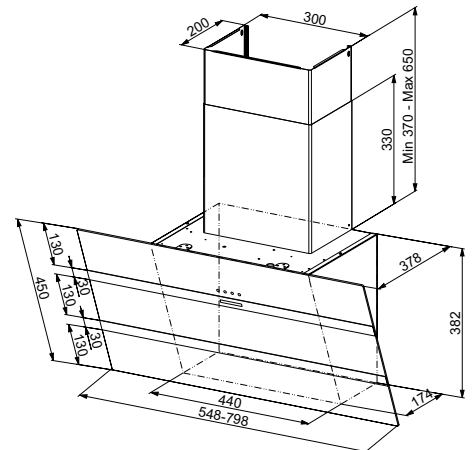


## Vanity

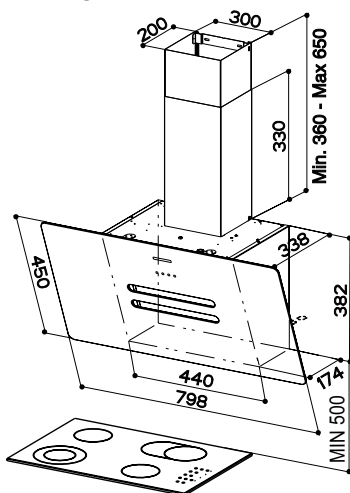


## Cocktail XS

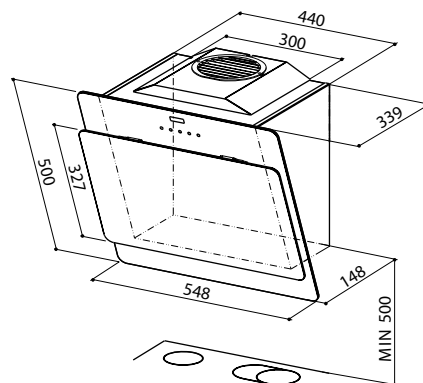


## Cocktail

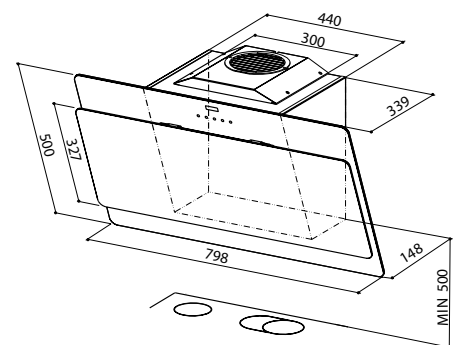


## Glam-Light

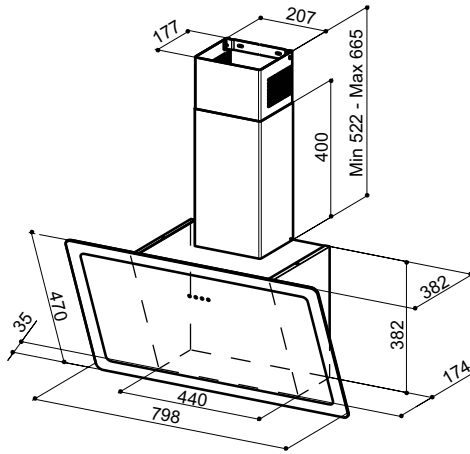


## Chloe XL

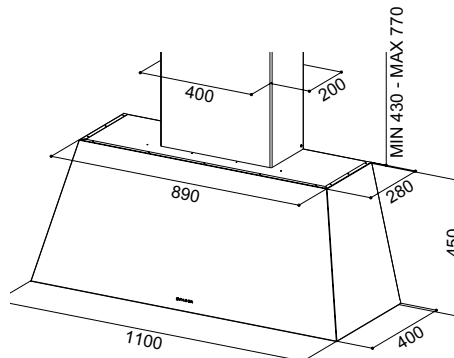


## Northia

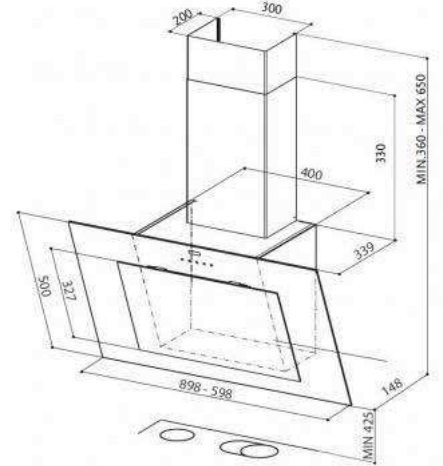


## Chloe

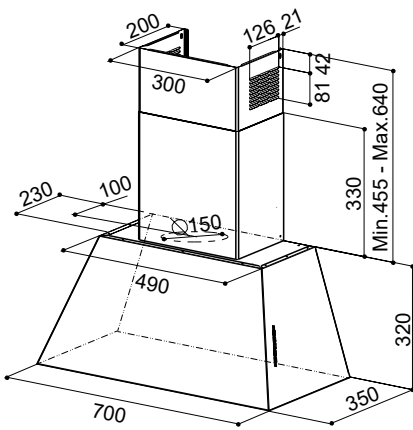


## Veil

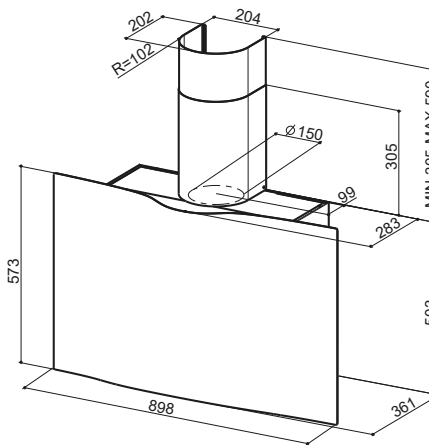


## Talika

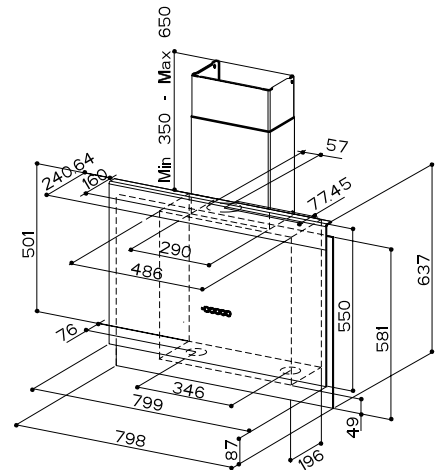


## Hoo-B Glass/Alu

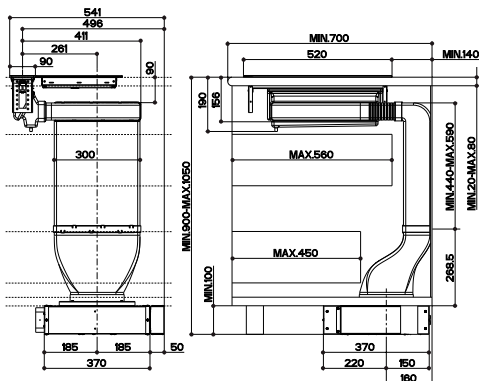

## FCH32 Hob/Alu

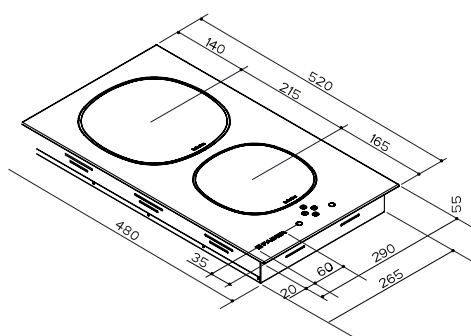


## FCH64 Hob

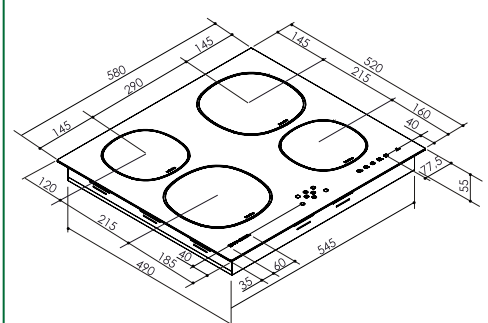





## Fabula

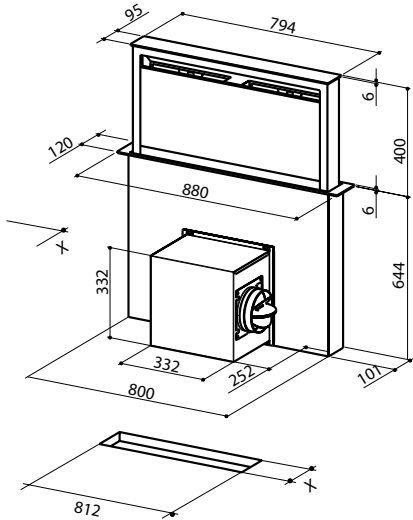


## FCH93 Hob

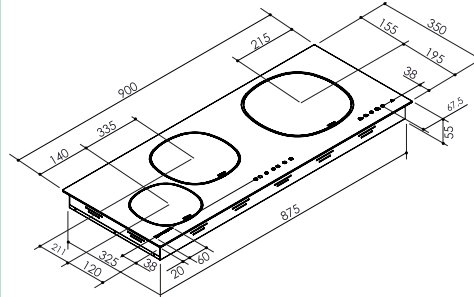


## Heaven 2.0 Glass

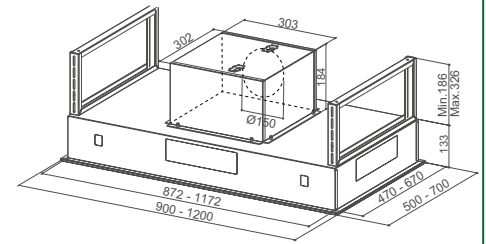


## Heaven 2.0

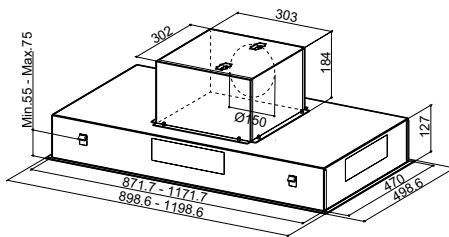


## Heaven 2.0 Flat Glass

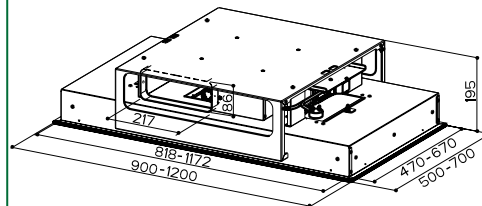


## Heaven 2.0 Flat

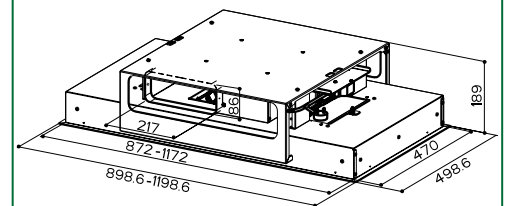


## High-Light White

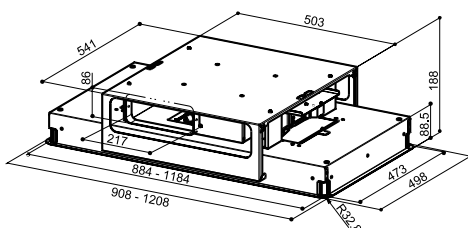


## High-Light

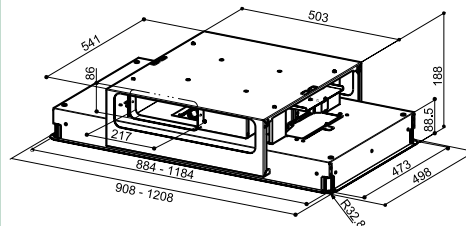


## Heaven Compact

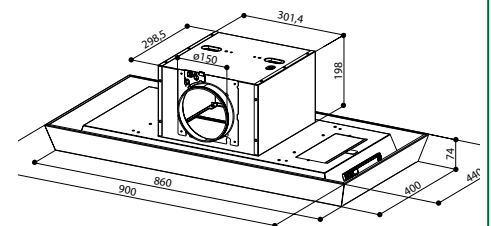


## Skypad 2.0

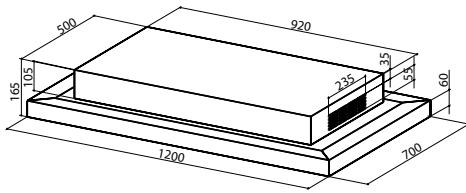


## Pareo Plus

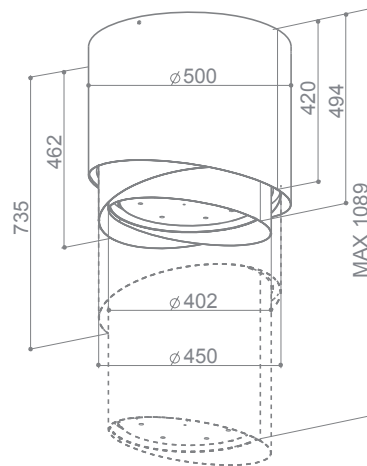


## Tratto Island

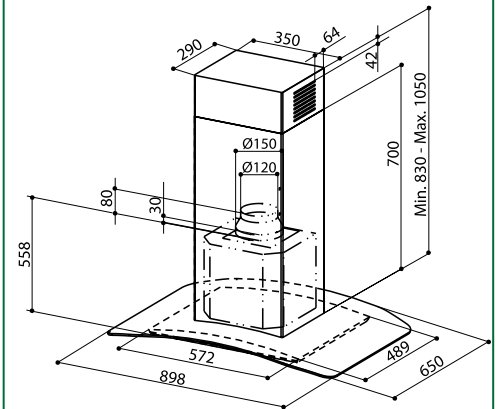


## Stilo Island

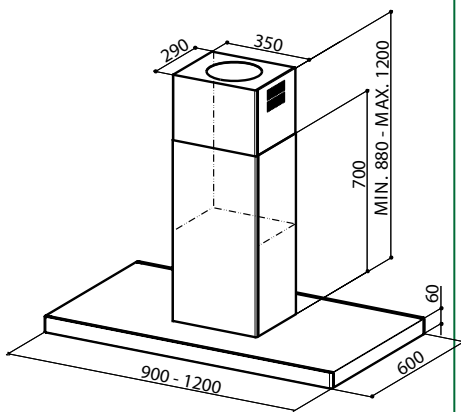


## T Light Island

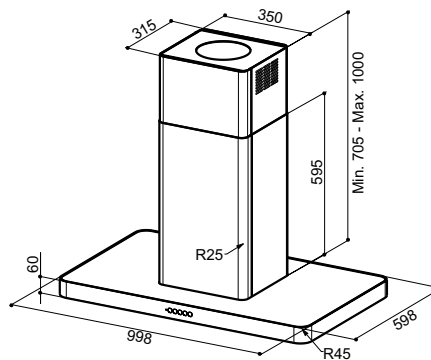


## Vanilla Plus

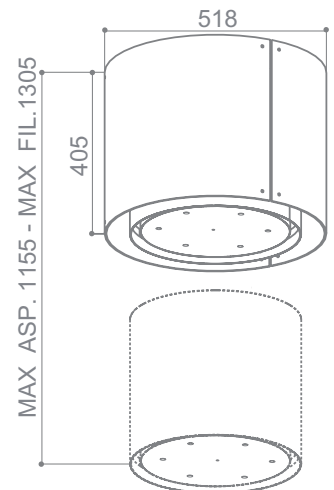

## Kaleidos Plus

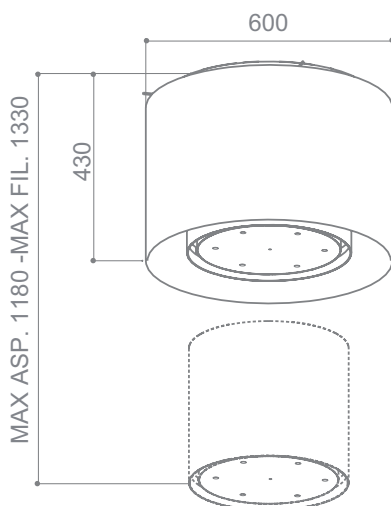

## Lybra Plus

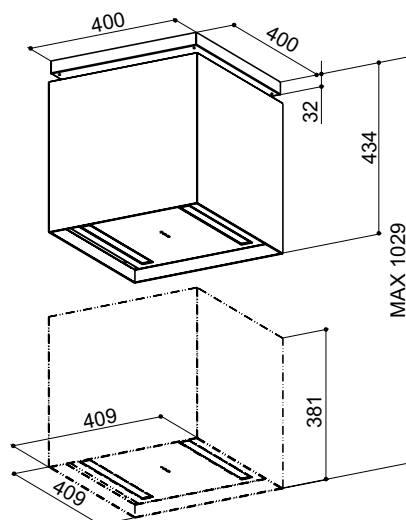





If you wish to view the range of Faber Hoods, why not visit our showroom and advisory centre, simply contact us to make an appointment



Free parts  
guarantee



Flanagan Fittings  
Falcon House  
Dublin Airport Logistics Park  
St. Margarets  
Co. Dublin  
K67 F303  
Ireland.

To log a service call please phone +353 (0)1 533 9862  
The customer must provide the following information;  
retailer's name, date of purchase, product code or name,  
description of fault and serial number which can be found  
on the rating plate on the inside of the cooker hood.


**Telephone**  
+353 (0)1 844 8400


**Fax**  
+353 (0)1 844 8009


**E-mail**  
sales@fff.ie

**Web**  
www.fff.ie

 Find us on  
**Facebook** FlanaganFittings

 @flananganfits

 FlanaganFittings

 FlanaganFittings

