



A I R M A T T E R S

## Cooker Hood Collection



8th edition

# AIR MATTERS

Air is without substance: a free spirit. At Faber we can weigh it, measure it, adapt it and shape it like solid matter. Air has been our substance for more than 60 years. Air technology is the reason we work. We are confident about our achievements because we know how to handle it.

Established in 1955 in Fabriano Italy, Faber are the original inventors of the cooker hood for kitchens.

Faber invented the kitchen hood in a small Italian workshop; for decades they have created, designed and manufactured hoods, becoming a global leader in the industry with regards to both production and technology. In Italy, one hood out of every two is a Faber hood. Faber's mission is to design and produce cooker hoods with high quality, technology and efficiency, to satisfy tastes and needs of the most diverse consumers.

Faber are an industrial group with a presence across the globe. They have commercial and production sites in eight nations and three continents. Today, with 60 years experience, key strengths include commitment, solidity, dedication and dynamism, which have always characterised the company. Faber transformed the range hood from a simple built-in element to a beautiful and functional appliance.

Faber do not confuse function with design but they are committed to innovation in both areas. Faber design their models knowing that the hood has a strong visual impact, enhancing and harmonizing the lines of the kitchen, integrating itself without losing its own style. Faber's response to consumer tastes can be seen in the wide range they offer so that every individual can reflect their own style in the kitchen. Faber's hoods are beautiful, ergonomic, efficient, and silent. More importantly, Faber's hoods do what they are intended to: they circulate the air in your kitchen in comfort.

## 1955

Faber Plast is founded.

## 1958



The first Plexiglas hood.

## 1963



EURO  
The first compact extractor fan housed in the hood.

## 1976



FL12 & FL15  
The first pull-out hoods.

## 1986



NOVA  
The first chimney hood.

## 1995



AXIA  
The first T-shape hood.

## 1999



M@STER  
The first smart hood.

## 2004



MATRIX  
The first hood that hangs like a picture.

## 2005



MAGICA  
The first self-activated hood..

## 2008



KLIMA  
The first air conditioning hood..

## 2009




IMAGO  
The first multi-function hood.

## 2010



F-LIGHT GENERATION  
The first chandelier hoods.

## 2014



SKYLIFT  
The first retractable hood built into the ceiling.

## 2015

Faber celebrate 60 years

# LEADERSHIP ALL OVER THE WORLD.



FABER  
**Fabriano (AN) - ITALIA**

FABER OFFICE  
**Hudson - U.S.A.**

SPAR SAN LUIS  
**Buenos Aires - ARGENTINA**

FRANKE MUTFAK  
**Manisa - TURKEY**

FRANKE FABER INDIA  
**Pune - INDIA**


ROBLIN  
**Villedieu-les-Poeles - FRANCE**

FRANKE FUTURUM  
**Byske - SWEDEN**

FABER OFFICE  
**Moscow - RUSSIA**

FABER NORTH AMERICA  
**San Luis Potosi - MEXICO**

## Choosing the right Cooker Hood



Choosing the right hood for your kitchen is not just about visual appeal...

In order to select the most suitable hood for your kitchen, you need to perform some very simple calculations to establish if the hood can extract sufficient volumes in your kitchen.

Simply measure, in meters, the length, width and height of your kitchen to calculate the volume. The volume calculation is performed as follows:

$$\text{Length (m)} \times \text{Width (m)} \times \text{Height (m)} = \text{Volume (m}^3\text{)}$$

Next multiply the volume by 10. The answer will give you the required capacity for your kitchen. When selecting your hood examine the Max Airflow and if the maximum airflow matches or exceeds your required capacity the hood is suitable for your kitchen.

You should also factor in the noise levels as you do not want to have a hood that matches your required capacity but is very loud. A simple guide for noise levels is if the hoods noise levels are below 55dB(A) it will not disturb your normal kitchen life. All hoods show the noise level range with the loudest noise representing the max airflow.

Please note that all extraction rates and noise levels reported within this brochure are in accordance with IEC standards. The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECED Code of Conduct. This Code of Conduct establishes clear rules of measurement common to all cooker hood manufacturers IEC/EN 61591. Please ensure that any cooker hoods you make look at comply with the code of conduct to make an accurate comparison.

# Features

An overview and explanation of the features that can be found across the Faber cooker hood range  
5

## Built In Collection



104/2104  
7



2108  
7



Flexa/Hip  
8



In-Light  
11 **NEW**



Inca Lux 2.0  
9



Inca Lux Glass  
10



Inca Plus  
9



Inca Smart  
9



Inca Smart HC  
9



Maxima  
8 **NEW**



Omnia  
8



Scrigno  
7



Victory  
10



Victory 2.0  
10

## Wall and Vertical Collection



Bella  
15 **NEW**



BlackTie  
21 **NEW**



City  
19



Cocktail  
20



Cocktail XS  
20



Daisy  
19 **NEW**



Gemma  
13



Glam Light  
21 **NEW**



Glove  
14



Infinity  
22



Jolie  
21



Look  
15 **NEW**



Luft  
16 **NEW**



Nice  
14



Northia  
21



Ray  
14



Solaris  
16



Steelmax  
19 **NEW**



Stilo  
14 **NEW**



Stilux  
15



Strip  
13



Talika  
22 **NEW**



T-Light  
15 **NEW**



Vesta  
13

# Down Draft and Ceiling Collection



Fabula  
27



Heaven 2.0  
29



Heaven 2.0 Glass  
29



Heaven 2.0 Flat  
30 **NEW**



Heaven 2.0 Flat Glass  
30 **NEW**



High-Light  
31 **NEW**



High-Light White  
31 **NEW**



Hoo-B  
25 **NEW**



Kalidos  
34



Hob FCH32  
25 **NEW**



Hob FCH64  
26 **NEW**



Hob FCH93  
27 **NEW**



Stilo  
33



SkyPad 2.0  
32 **NEW**



Tratto  
33



T-Light  
33 **NEW**



Vanilla  
34



Vertigo  
34

# External Motor Collection



Fabula  
37 **NEW**



Heaven 2.0  
37 **NEW**



Heaven 2.0 Glass  
37 **NEW**



Jolie  
38 **NEW**



Ray  
38 **NEW**



Stilo  
38 **NEW**



Stilo Island  
38 **NEW**


# Accessories And Diagrams



Ducting Kit  
39



Filters  
39




High Performance  
Filters 40



HFH Filter  
40



Silent Kit  
41




Remote Blower  
40



Splashbacks  
41



Chimney  
42




Diagrams  
43



Hood can be vented directly out without the use of the chimney



The new Faber diffuser enables a leap in energy quality from Class C to Class A. It also provides high performance with low power consumption.



This technology offers pleasant natural lighting and faithfully reproduces the colour of the illuminated items at just 2W.



85% power consumption (kW/h) at medium-low speeds that are most often used. It is the most silent motor on the market.



Allows the hood to be switched on for 24 hours a day for continuous air renewal with a level of noise that is imperceptible.



Energy Diffuser: it reduces noise up to 3dB(A) and higher hood efficiency by 30% even in the presence of long air outlet.



High Filtration kit that reduces extraction by just 5%, the filter can be placed in the dishwasher and reused



The Evo diffuser has an optimised geometry that results in excellent energy efficiency, reduced power consumption and noise level.



Filter saturation alarm: warns you when it is time to clean the anti-grease filter or substitute the anti-odour filter.



The ability to install the motor away from the hood frees it from architectural constraints and reduces noise in the kitchen.



A high performance filter that only reduces extraction by 15% and lasts twice as long as standard filters



Function which activates maximum aspiration for 6 minutes to meet special cooking needs.



Reduced light intensity with the simple press of a button with low level of energy consumption, light can be left on for long periods of time.



A special range of hoods and hobs that communicate and can be controlled via the hob.



Allows automatic delayed switching off of the motor to complete elimination of residual odours.



Faber hoods with electronic commands come with remote controls, which are particularly useful for people with reduced mobility.



Reduces the perceived sound by up to 25%. (\*) Washable sound-absorbing cushions which sound proof the hood. (\*) Equal to a reduction of 3dB(A) according to norm EN 60704-3



Hoods that have the motor concealed in the main body, thus eliminating the need for a chimney in recycle mode.



Offers maximum comfort and practicality in the kitchen: operated by remote control the hood gently lowers onto the hob increasing its efficiency.



Anti-fingerprint steel, Special anti-fingerprint steel for a perfectly clean hood and a steel surface free of annoying marks.




Reduces the perceived sound by 25%. This aspiration guarantees optimised effectiveness



Eliminates the condensation effect under and around the hood. Controlled air jets released from the hood create two vortices that control the intake of smoke and steam.



Double extraction is derived from the overlapping of two glass panels in vertical hoods, ensuring greater hood effectiveness

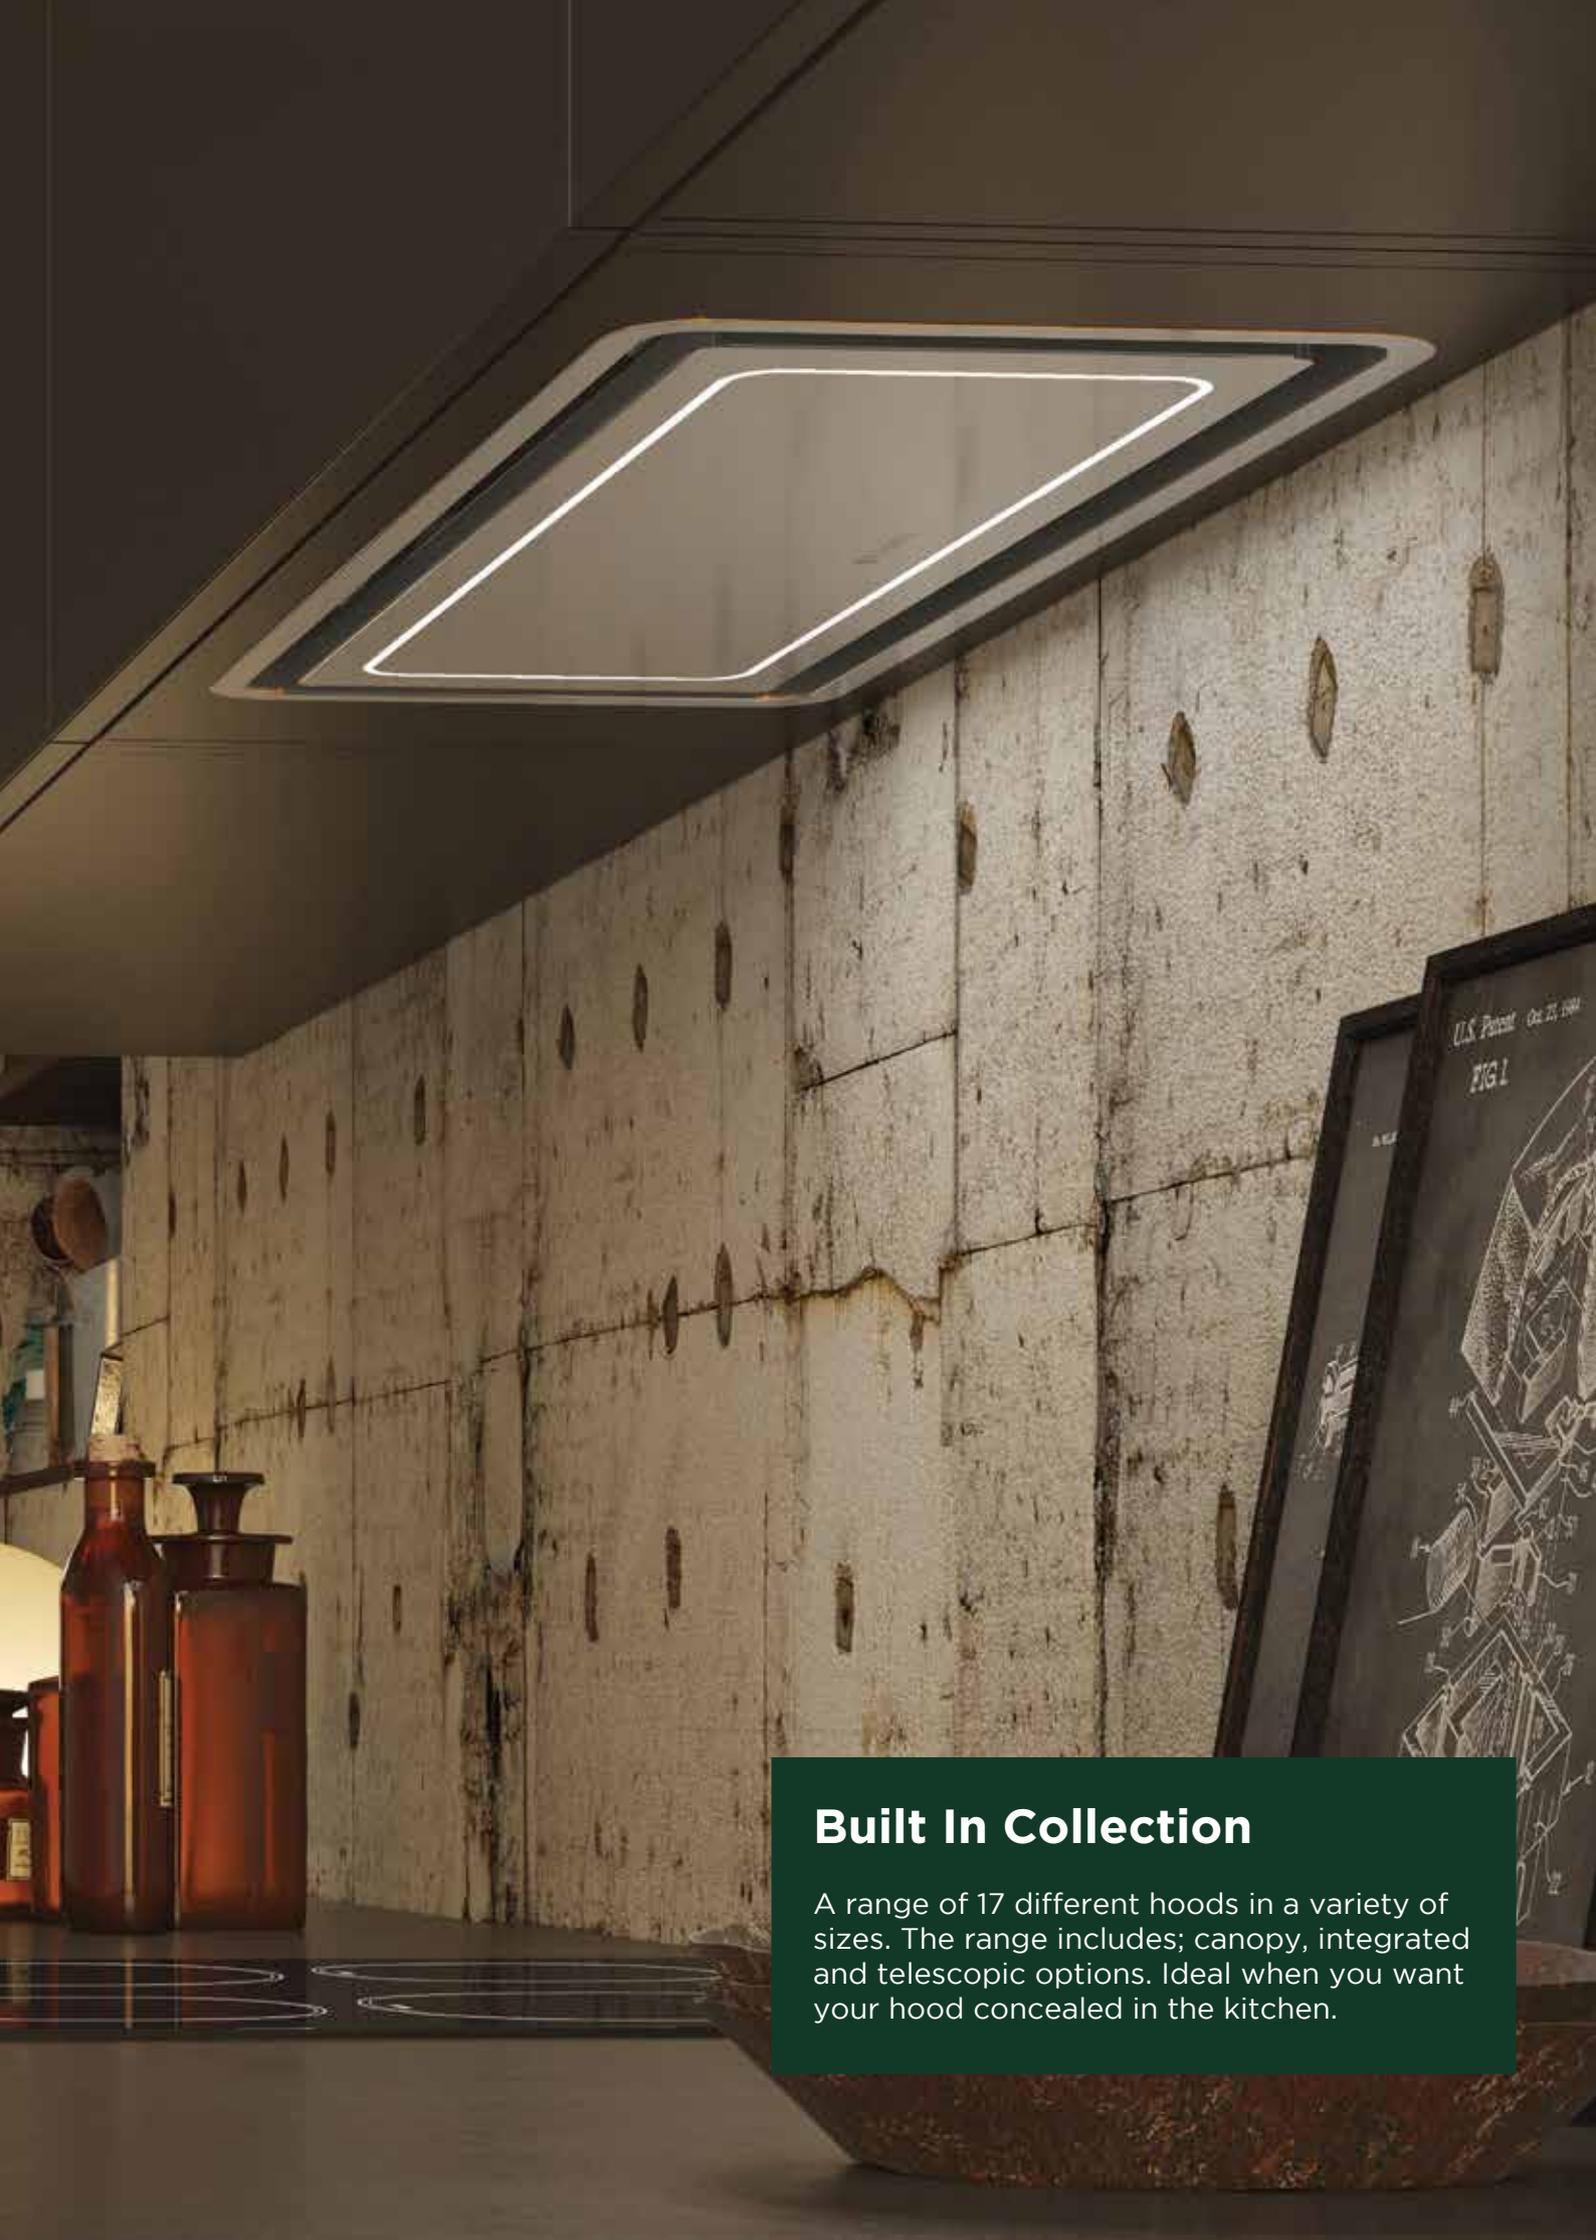

## Built In Collection

A range of 17 different hoods in a variety of sizes. The range includes; canopy, integrated and telescopic options. Ideal when you want your hood concealed in the kitchen.

## 104

FA104 Single Motor



Finish: Grey  
Micro Switch controls  
Width: 600 mm

Metal Filters  
Incandescent lamps  
Energy: E rated

Speed	1	2	3
Air m3/h	120	160	230
Noise dB(A)	52	56	62

Single Motor €79

## 2104

FA2104 Twin Motor



Finish: Grey  
Micro Switch controls  
Width: 600 mm

Dishwasher Safe Filters  
Incandescent lamps  
Energy: E rated

Speed	1	2	INT
Air m3/h	250	370	490
Noise dB(A)	56	61	67

Twin Motor €99

## 2108

FA210860GR - 600 mm  
FA210869GR - 900 mm



Finish: Light Grey  
Electromechanical Controls  
Width: 600 / 900 mm

Dishwasher Safe Filters  
2 x 28W lights  
Energy: D rated

Speed	1	2	INT
Air m3/h	240	310	510
Noise dB(A)	60	64	72

600 mm €199

900 mm €209

## Scrigno

FASC60SSG - 563 mm  
FASC90SSG - 863 mm



Finish: Stainless Steel  
Electromechanical Controls  
Width: 560 / 860 mm

Dishwasher Safe Filters  
2 x 20W lights  
Energy: C rated

Speed	1	2	3
Air m3/h	310	480	620
Noise dB(A)	49	58	65

563 mm €399

863 mm €449



All extraction rates and noise levels reported are in accordance with IEC standards.

The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECEC **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591

### Flexa

FAFL60GR - 600 mm



Finish: Metal Grey  
Electromechanical Controls  
Width: 600 mm  
Dishwasher Safe Filters  
2 x 28W lights  
Energy: E rated

Speed	1	2	3
Air m3/h	190	250	300
Noise dB(A)	50	56	62

600 mm €105

### Flexa Hip

FAFH60ASS - 600 mm



Finish: Alu / Stainless Steel  
Electromechanical Controls  
Width: 600 mm  
Dishwasher Safe Filters  
2 x 28W lights  
Energy: E rated

Speed	1	2	3
Air m3/h	220	320	420
Noise dB(A)	57	65	69

600 mm €129

### Omnia

FAOM60ASS - 600 mm

FAOM90ASS - 900 mm



Finish: Alu / Stainless Steel  
Electromechanical Controls  
Width: 600 / 900 mm  
Dishwasher Safe Filters  
2x9W lights  
Energy: E rated

Speed	1	2	3	4
Air m3/h	270	375	430	480
Noise dB(A)	53	60	63	67

600 mm €209

900 mm €239

### Maxima

FAMX60ASS - 600 mm

FAMX90ASS - 900 mm



Finish: Alu / Stainless Steel  
Electromechanical Controls  
Width: 600 / 900 mm  
Dishwasher Safe Filters  
2 x 20W lights  
Energy: C rated

Speed	1	2	3
Air m3/h	300	470	615
Noise dB(A)	48	58	65

600 mm €259

900 mm €279



All extraction rates and noise levels reported are in accordance with IEC standards.

The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECEC **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/ EN 61591

All retail prices include VAT at 23%  
For technical information log onto [www.fff.ie](http://www.fff.ie)

⌘ = Lead times apply for these models of up to 6 Weeks

Subject to technical modifications and changes to the range without notice

## Inca Smart

FAIS52GR - 520 mm



Finish: Light Grey      Synthetic Filters  
Electromechanical Controls      2 x 28W lights  
Width: 520 mm      Energy: E rated

Speed	1	2	3
Air m3/h	125	160	205
Noise dB(A)	39	45	56

520 mm €64

## Inca Smart HC

FAIH52SS - 520 mm  
FAIH70SS - 700 mm



Finish: Stainless Steel      Dishwasher Safe Filters  
Electromechanical Controls      2 x 28W lights  
Width: 520 / 700 mm      Energy: E rated

Speed	1	2	3
Air m3/h	235	330	400
Noise dB(A)	57	66	70

520 mm €119

700 mm €129

## Inca Plus

FAIP52SS - 520 mm  
FAIP70SS - 700 mm



Finish: Stainless Steel      Dishwasher Safe Filters  
Electromechanical Controls      2 x 28W lights  
Width: 520 / 700 mm      Energy: D rated

Speed	1	2	3
Air m3/h	250	340	505
Noise dB(A)	52	59	69

520 mm €139

700 mm €149

## Inca Lux 2.0

FAIL52SS - 520 mm  
FAIL70SS - 700 mm




Finish: Stainless Steel      Dishwasher Safe Filters  
Electronic LED Controls      2 x LED lights  
Width: 520 / 700 mm      Energy: C rated

Speed	1	2	3	INT
Air m3/h	310	470	610	690
Noise dB(A)	50	59	65	68

520 mm €369

700 mm €389

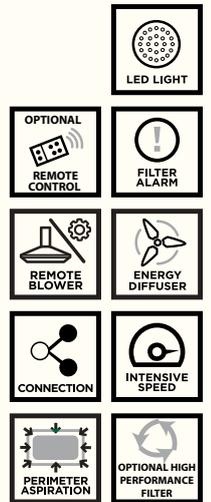

All extraction rates and noise levels reported are in accordance with IEC standards.

The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECEC **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591

## Victory

FAVI77SS - 770 mm  
FAVI99SS - 990 mm



Finish: Stainless Steel      Dishwasher Safe Filters  
Remote Controls              2 x 20 lights  
Width: 770 / 990 mm        Energy: D rated

Speed	1	2	3	4	INT
Air m3/h	180	250	390	530	605
Noise dB(A)	49	58	64	67	74

770 mm €429

990 mm €459

## Victory 2.0

FAVI277SS - 770 mm  
FAVI299SS - 990 mm



Finish: Stainless Steel      Dishwasher Safe Filters  
Electronic LED Controls      LED lights  
Width: 770 / 990 mm        Energy: C rated


Speed	1	2	3	INT
Air m3/h	230	350	485	605
Noise dB(A)	50	61	67	70

770 mm €449

990 mm €479

## Inca Lux Black Glass

FAIL52BG - 520 mm  
FAIL70BG - 700 mm

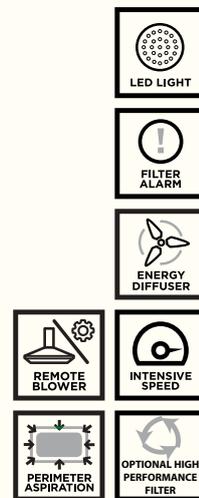

Finish: Glass/Stainless Steel      Dishwasher Safe Filters  
Electronic Touch Controls        2 x LED lights  
Width: 520 / 700 mm              Energy: C rated


Speed	1	2	3	INT
Air m3/h	310	475	620	690
Noise dB(A)	50	59	65	68

520 mm €399

700 mm €429

## Inca Lux White Glass

FAIL52WG - 520 mm  
FAIL70WG - 700 mm

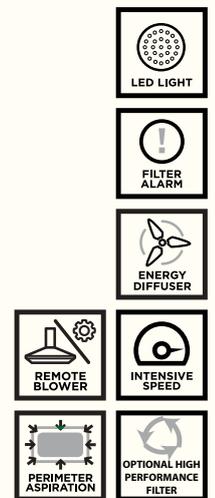

Finish: Glass/Stainless Steel      Dishwasher Safe Filters  
Electronic Touch Controls        2 x LED lights  
Width: 520 / 700 mm              Energy: C rated

Speed	1	2	3	INT
Air m3/h	310	475	620	690
Noise dB(A)	50	59	65	68

520 mm €399

700 mm €429

All extraction rates and noise levels reported are in accordance with IEC standards.

The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECEC **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591

All retail prices include VAT at 23%  
For technical information log onto [www.fff.ie](http://www.fff.ie)

⌘ = Lead times apply for these models of up to 6 Weeks

Subject to technical modifications and changes to the range without notice

## In-Light **NEW**

FAINL52SS - 520 mm  
 FAINL70SS - 700 mm




Finish: Stainless Steel      Dishwasher Safe Filters  
 Electronic LED Controls      Perimeter LED lights  
 Width: 520 / 700 mm      Energy: A rated

Speed	1	2	3	INT
Air m3/h	260	380	525	635
Noise dB(A)	56	65	70	72

520 mm €699

700 mm €719

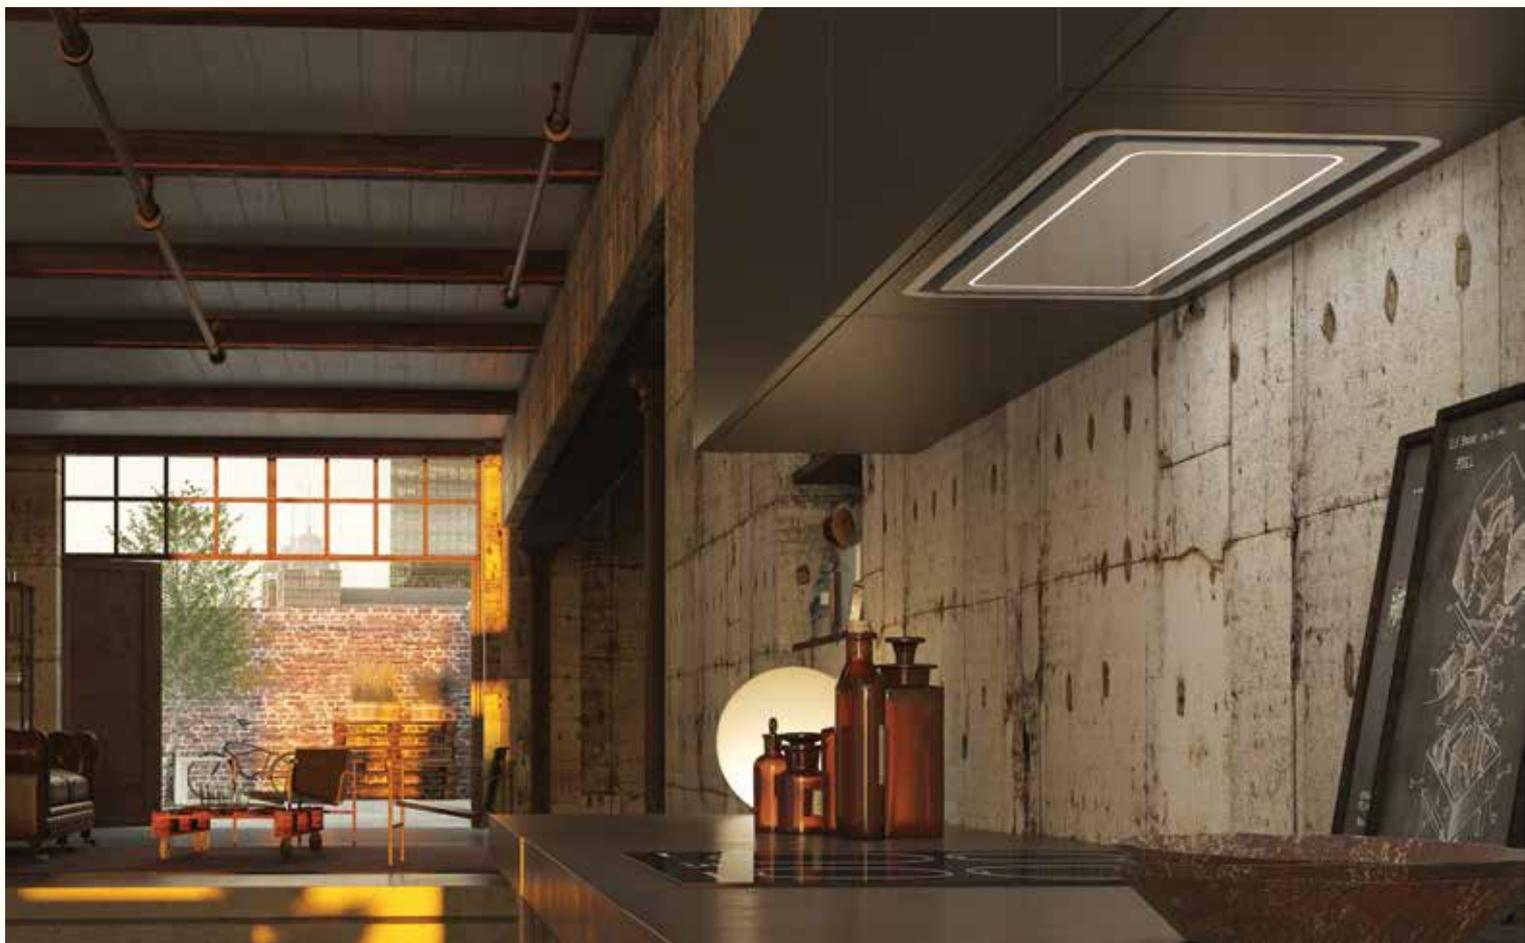

All extraction rates and noise levels reported are in accordance with IEC standards.

The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECEC **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591



## Wall Collection

A range of 14 different hoods in a variety of sizes. The range includes; T-Shaped, glass and chimney designs. High performance as a standard.

## Vesta

FAVE60BK - 600 mm  
FAVE90BK - 900 mm



Finish: Black  
Push Button Controls  
Width: 600 / 900 mm  
Dishwasher Safe Filters  
2 x 28W lights  
Energy: E rated

Speed	1	2	3
Air m3/h	230	330	430
Noise dB(A)	53	61	67

600 mm €109

900 mm €119

## Vesta

FAVE60SS - 600 mm  
FAVE90SS - 900 mm



Finish: Stainless Steel  
Push Button Controls  
Width: 600 / 900 mm  
Dishwasher Safe Filters  
2 x 28W lights  
Energy: E rated

Speed	1	2	3
Air m3/h	230	330	430
Noise dB(A)	53	61	67

600 mm €119

900 mm €129

## Strip

FAST60SS - 600 mm  
FAST90SS - 900 mm



Finish: Stainless Steel  
Push Button Controls  
Width: 600 / 900 mm  
Dishwasher Safe Filters  
2 x 28W lights  
Energy: E rated

Speed	1	2	3
Air m3/h	265	355	410
Noise dB(A)	49	54	61

600 mm €159

900 mm €169

## Gemma

FAGE60SS - 600 mm  
FAGE90SS - 900 mm



Finish: Stainless Steel  
Electromechanical Controls  
Width: 600 / 900 mm  
Dishwasher Safe Filters  
2 x 28W lights  
Energy: E rated

Speed	1	2	3
Air m3/h	210	285	370
Noise dB(A)	52	59	63

600 mm €229

900 mm €249

All extraction rates and noise levels reported are in accordance with IEC standards.

The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECEC **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591

## Ray

FARA60SS - 600 mm  
FARA90SS - 900 mm



Finish: Glass/Stainless Steel     Dishwasher Safe Filters  
Push Button Controls                 2 x 20W Lights  
Width: 600 / 900 mm                 Energy: E rated

Speed	1	2	3
Air m3/h	210	330	410
Noise dB(A)	50	60	66

600 mm €239

900 mm €259

## Nice

FANI60SS - 600 mm  
FANI90SS - 900 mm



Finish: Glass/Stainless Steel     Dishwasher Safe Filters  
Push Button Controls                 2 x 20W Lights  
Width: 600 / 900 mm                 Energy: E rated


Speed	1	2	3
Air m3/h	210	330	410
Noise dB(A)	50	60	66

600 mm €239

900 mm €259

## Stilo

FASE60SS - 600 mm  
FASE90SS - 900 mm

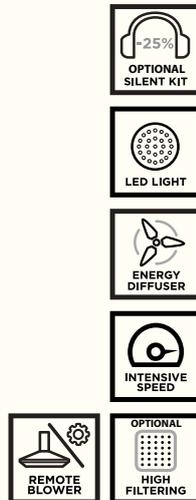

Finish: Stainless Steel                 Dishwasher Safe Filters  
Electronic Touch Controls             2 x LED lights  
Width: 600 / 900 mm                 Energy: C rated

Speed	1	2	3	INT
Air m3/h	310	480	610	685
Noise dB(A)	54	62	67	70

600 mm €319

900 mm €339

## Glove

FAGL60SS - 600 mm  
FAGL90SS - 900 mm



Finish: Stainless Steel                 Dishwasher Safe Filters  
Touch Controls                             2 x LED lights  
Width: 600 / 900 mm                 Energy: C rated

Speed	1	2	3	INT
Air m3/h	275	400	480	510
Noise dB(A)	57	64	68	70

600 mm €359

900 mm €379

All extraction rates and noise levels reported are in accordance with IEC standards.

The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECEC **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591

All retail prices include VAT at 23%  
For technical information log onto [www.fff.ie](http://www.fff.ie)

⌘ = Lead times apply for these models of up to 6 Weeks

Subject to technical modifications and changes to the range without notice

## Bella

FABE60SS - 600 mm  
FABE90SS - 900 mm



**NEW**

Finish: Stainless Steel      Dishwasher Safe Filters  
Electronic LED Controls      2 x 20W lights  
Width: 600 / 900 mm      Energy: C rated

Speed	1	2	3	INT
Air m3/h	315	480	610	685
Noise dB(A)	54	62	67	71




## Stilux

FASX60SSG - 600 mm  
FASX90SSG - 900 mm



Finish: Glass/Stainless Steel      Dishwasher Safe Filters  
Touch Controls      2 x LED lights  
Width: 600 / 900 mm      Energy: A rated

Speed	1	2	3	INT
Air m3/h	290	410	560	690
Noise dB(A)	51	58	65	69

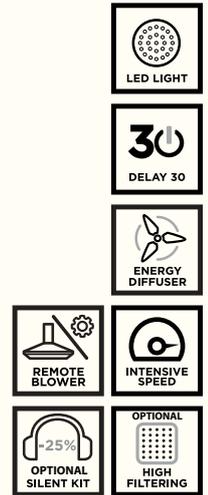

600 mm €439

900 mm €469

600 mm €469

900 mm €489

## Look


FALO90SS - 900 mm



**NEW**

Finish: Glass/Stainless Steel      Dishwasher Safe Filters  
Evo Touch Controls      2 x LED lights  
Width: 900 mm      Energy: A+ rated

Speed	1	2	3	4	INT
Air m3/h	200	400	510	620	680
Noise dB(A)	40	54	61	65	69

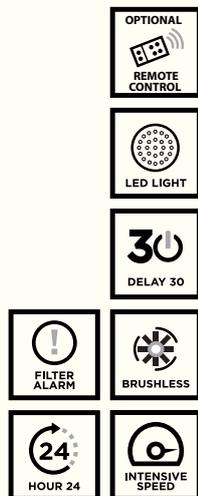

900 mm €819

## T-Light


FATL90SS - 900 mm †



**NEW**

Finish: Stainless Steel      Dishwasher Safe Filters  
Touch Controls      Perimeter LED light  
Width: 900 mm      Energy: A rated

Speed	1	2	3	INT
Air m3/h	260	380	525	635
Noise dB(A)	56	65	70	72

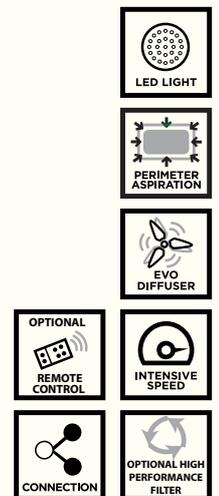


900 mm €939

All extraction rates and noise levels reported are in accordance with IEC standards.

The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECEC **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591

## Luft

FALU90SS - 900 mm †

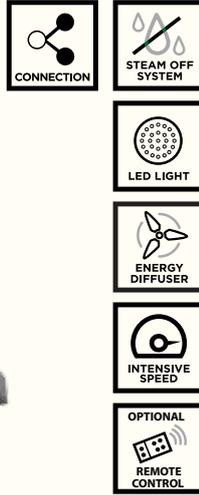

**NEW**

Finish: Stainless Steel  
Squarcle Touch Controls  
Width: 900 mm

Dishwasher Safe Filters  
LED lights  
Energy: A rated

Speed	1	2	INT
Air m3/h	310	430	720
Noise dB(A)	50	57	69

900 mm €1,279

## Solaris

FASO100SS - 1000 mm



Finish: Stainless Steel  
Electromechanical Controls  
Width: 1000 x 1000 mm

Dishwasher Safe Filters  
4 x 20 W lights  
Energy: D rated

Speed	1	2	INT
Air m3/h	300	440	570
Noise dB(A)	57	64	71

1000 mm €769



All extraction rates and noise levels reported are in accordance with IEC standards.

The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECEC **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591

All retail prices include VAT at 23%  
For technical information log onto [www.fff.ie](http://www.fff.ie)

† = Lead times apply for these models of up to 6 Weeks

Subject to technical modifications and changes to the range without notice

All extraction rates and noise levels reported are in accordance with IEC standards.

The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECEC **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591



## Vertical Collection

A range of 10 different hoods in a variety of sizes and finishes. Vertical hoods have the advantage of attractive designs which also act as "head savers"

## Daisy

FADA55BG - 550 mm  
FADA80BG - 800 mm



Finish: Glass/Stainless Steel    Dishwasher Safe Filters  
Electronic Touch Controls    2 x 20W  
Width: 550 / 800 mm    Energy: D rated

Speed	1	2	3	INT
Air m3/h	290	430	510	550
Noise dB(A)	56	63	68	70

550 mm €459

800 mm €509



## Steelmax

FASM55BGSS - 550 mm  
FASM80BGSS - 800 mm



Finish: Glass/Stainless Steel    Dishwasher Safe Filters  
Electronic Touch Controls    2 x 20W  
Width: 550 / 800 mm    Energy: C rated


Speed	1	2	3	INT
Air m3/h	310	480	620	700
Noise dB(A)	52	61	67	70

550 mm €479

800 mm €539

## City

FACI60BSS - 600 mm  
FACI90BSS - 800 mm

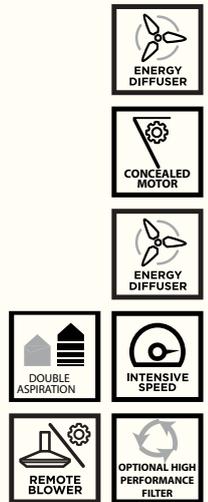

Finish: Glass/Stainless Steel    Dishwasher Safe Filters  
Touch Controls    2 x 20W lights  
Width: 600 / 800 mm    Energy: D rated

Speed	1	2	3	INT
Air m3/h	240	360	465	540
Noise dB(A)	49	58	64	67

600 mm €529


800 mm €549

All extraction rates and noise levels reported are in accordance with IEC standards.

The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECEC **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591

### Cocktail

FACO80BG - 800 mm

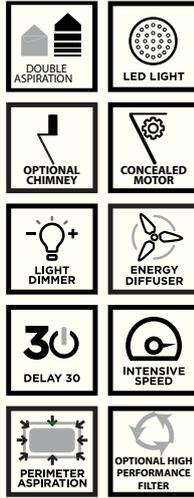


Finish: Glass/Stainless Steel    Dishwasher Safe Filters  
 Electronic Touch Controls    2 x LED lights  
 Width: 800 mm    Energy: C rated

Speed	1	2	3	INT
Air m3/h	285	415	500	535
Noise dB(A)	56	62	66	68

Black Glass €579

### Cocktail XS

FACO55BG - 550 mm

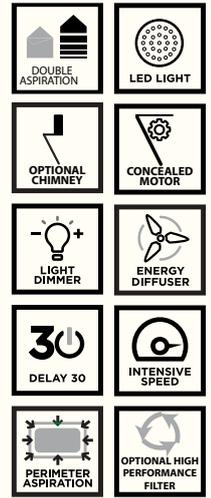


Finish: Glass/Stainless Steel    Dishwasher Safe Filters  
 Touch Controls    2 x LED lights  
 Width: 550 mm    Energy: C rated

Speed	1	2	3	INT
Air m3/h	285	415	500	535
Noise dB(A)	56	62	66	68

Black Glass €569

### Cocktail

FACO55WG - 800 mm

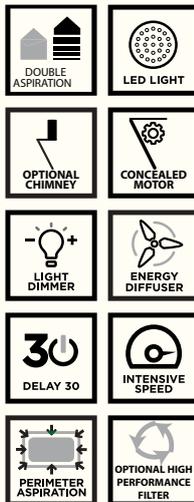


Finish: Glass/Stainless Steel    Dishwasher Safe Filters  
 Electronic Touch Controls    2 x LED lights  
 Width: 800 mm    Energy: C rated

Speed	1	2	3	INT
Air m3/h	285	415	500	535
Noise dB(A)	56	62	66	68

White Glass €579

### Cocktail XS

FACO55WG - 550 mm

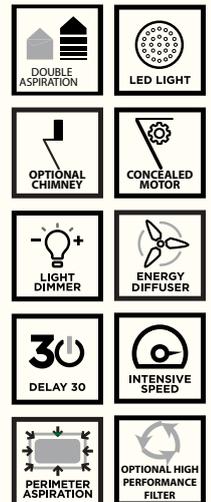

Finish: Glass/Stainless Steel    Dishwasher Safe Filters  
 Touch Controls    2 x LED lights  
 Width: 550 mm    Energy: C rated

Speed	1	2	3	INT
Air m3/h	285	415	500	535
Noise dB(A)	56	62	66	68

White Glass €569

All extraction rates and noise levels reported are in accordance with IEC standards.

The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECEC **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591

All retail prices include VAT at 23%  
 For technical information log onto [www.fff.ie](http://www.fff.ie)

⌘ = Lead times apply for these models of up to 6 Weeks

Subject to technical modifications and changes to the range without notice

## Glam-Light

FAGT80WG - 800 mm



**NEW**

Finish: White Glass  
Touch Controls  
Width: 800 mm


Dishwasher Safe Filters  
LED Lights  
Energy: A+ rated

Speed	1	2	3	INT
Air m3/h	310	420	580	720
Noise dB(A)	52	56	62	65

800 mm €659

## Northia

FANO90BG - Black Glass  
FANO90WG - White Glass †

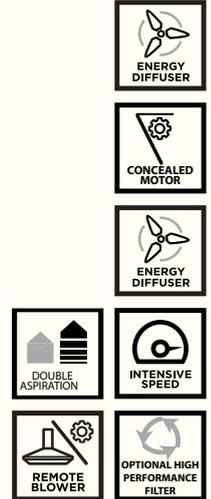

Finish: Glass/Stainless Steel  
Touch Controls  
Width: 900 mm

Dishwasher Safe Filters  
2 x LED lights  
Energy: A rated


Speed	1	2	3	INT
Air m3/h	290	400	570	600
Noise dB(A)	52	59	66	70.

Black Glass €679

White Glass €719

## Jolie

FAJO80BG - 800 mm

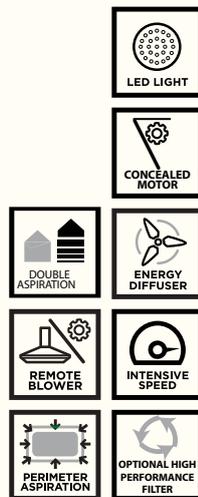

Finish: Glass  
Electronic Backlit Controls  
Width: 800 mm

Dishwasher Safe Filters  
2 x LED lights  
Energy: C rated

Speed	1	2	3	INT
Air m3/h	280	400	480	520
Noise dB(A)	57	63	68	69

Black Glass €709

## Black Tie

FABT90BG - 800 mm †



Finish: Glass  
EVO Touch Controls  
Width: 800 mm

Dishwasher Safe Filters  
2 x LED light  
Energy: A+ rated

Speed	1	2	3	4	INT
Air m3/h	200	390	500	620	700
Noise dB(A)	43	57	62	67	69

Black Glass €969

All extraction rates and noise levels reported are in accordance with IEC standards.

The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECEC **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591

### Infinity

FAIN80BG - Black Glass  
FAIN80AG - Almond Glass



- DOUBLE ASPIRATION
- REMOTE BLOWER
- LED LIGHT
- OPTIONAL REMOTE CONTROL
- FILTER ALARM
- CONCEALED MOTOR
- HOUR 24
- ENERGY DIFFUSER
- DELAY 30
- INTENSIVE SPEED
- PERIMETER ASPIRATION
- OPTIONAL HIGH PERFORMANCE FILTER

Finish: Glass  
EVO Touch Controls  
Width: 800 mm

Dishwasher Safe Filters  
LED bar light  
Energy: B rated

Speed	1	2	3	INT
Air m3/h	290	410	570	690
Noise dB(A)	52	59	66	70

Black Glass €1019      Almond Glass €1,059



### Talika

FATA80CO - Copper



- LED LIGHT
- CONCEALED MOTOR
- OPTIONAL REMOTE CONTROL
- NAUTILUS
- DOUBLE ASPIRATION
- INTENSIVE SPEED
- PERIMETER ASPIRATION
- OPTIONAL HIGH PERFORMANCE FILTER

**NEW**

Finish: Copper  
Squarcle Controls  
Width: 800 mm

Dishwasher Safe Filters  
LED lights  
Energy: A rated

Speed	1	2	3	INT
Air m3/h	260	385	445	530
Noise dB(A)	56	65	70	72

Copper €1,489




All extraction rates and noise levels reported are in accordance with IEC standards.

The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECEC **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591

All retail prices include VAT at 23%  
For technical information log onto [www.fff.ie](http://www.fff.ie)

† = Lead times apply for these models of up to 6 Weeks

Subject to technical modifications and changes to the range without notice

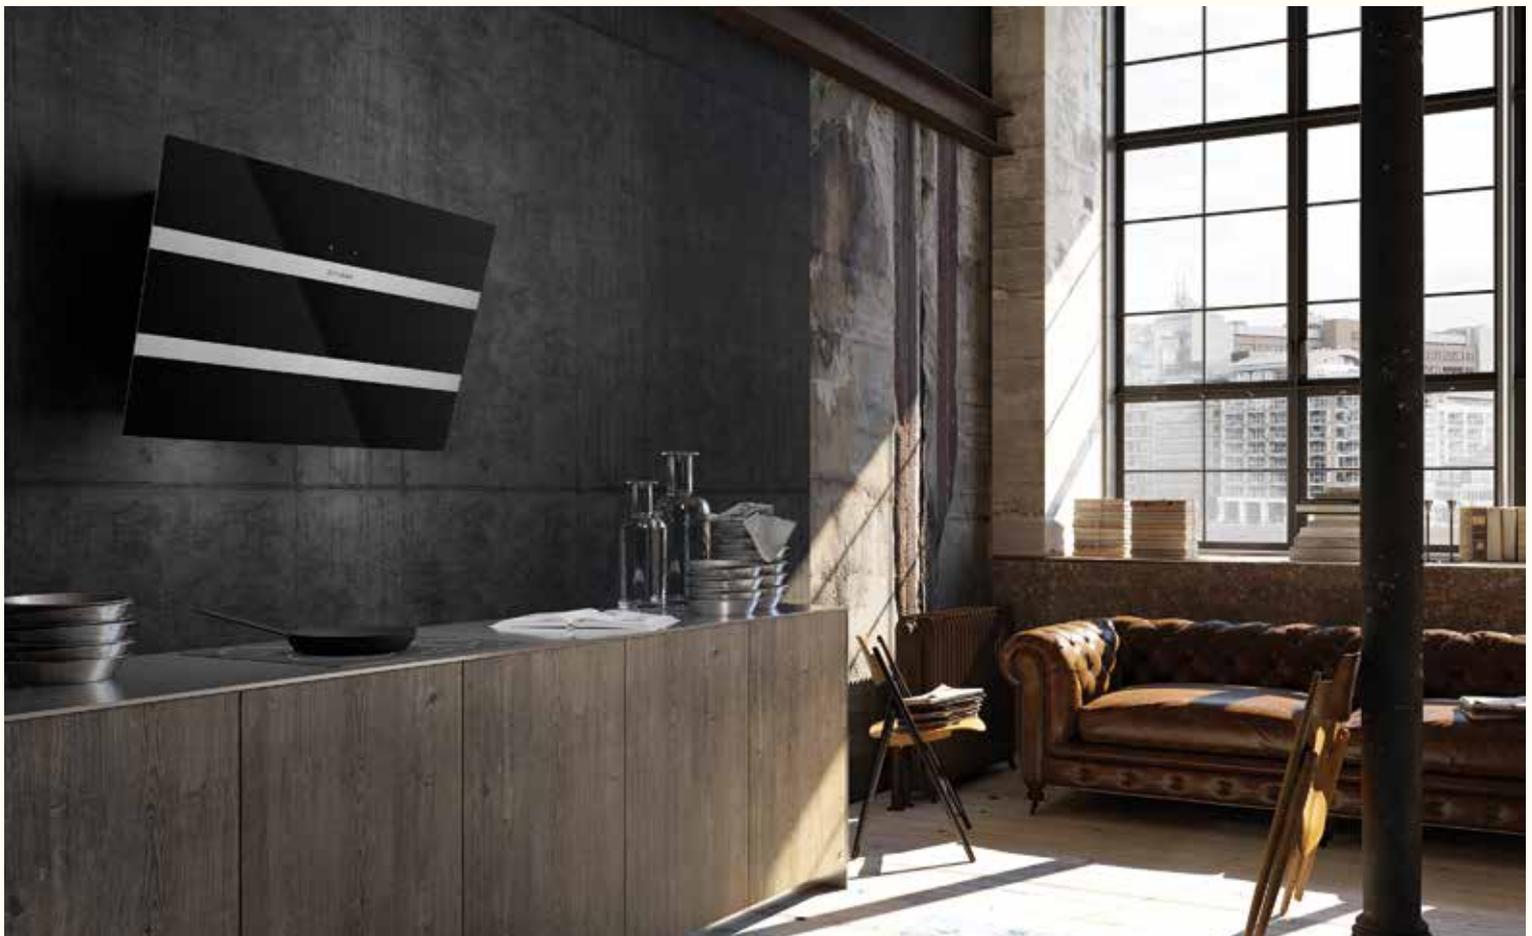

All extraction rates and noise levels reported are in accordance with IEC standards.

The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECEC **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591



## Downdraft and Hob Collection

A range of downdraft hoods and induction cooking hobs that can control numerous hoods via wireless connection

## Hoo-B Glass Downdraft

FAHO52BG



**NEW**

Finish: Glass  
Electronic Touch Controls  
Depth: 520 mm

Dishwasher Safe Filters  
Min 600 mm worktop  
Energy: A+ Rated

Speed	1	2	3	INT
Air m3/h	415	480	540	600
Noise dB(A)	62	64	68	70

Black Glass €1,449

## Hoo-B Glass / Alu Downdraft

FAHO52BGA



**NEW**

Finish: Glass/Aluminium Frame  
Electronic Touch Controls  
Depth: 520 mm

Dishwasher Safe Filters  
Min 600 mm worktop  
Energy: A+ Rated

Speed	1	2	3	INT
Air m3/h	415	480	540	600
Noise dB(A)	62	64	68	70

Black Glass / Aluminium €1,449

## Induction Hob FCH32

FAP1290G



**NEW**

Finish: Glass  
Touch Controls  
Width: 290 mm  
9 Power Levels  
Timer 1-99 min  
Booster

Min-Max pan size: 110-225.  
Energy: 3700W  
Auto Switch off  
Over Heat Protection  
Auto Shutdown Protection  
Power On Indicator

Black Glass €545

## Induction Hob FCH32C Alu Frame

FAP1290GA



**NEW**

Finish: Glass/Aluminium  
Touch Controls  
Width: 290 mm  
9 Power Levels  
Timer 1-99 min  
Booster

Min-Max pan size: 110-225.  
Energy: 3700W  
Auto Switch off  
Over Heat Protection  
Auto Shutdown Protection  
Power On Indicator

Black Glass / Aluminium €609

All extraction rates and noise levels reported are in accordance with IEC standards.

The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECEC **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591

**Induction Hob FCH64**

FAP1580G



**NEW**

Finish: Glass  
 Touch Controls  
 Width: 580 mm  
 9 Power Levels  
 Timer 1-99 min  
 Booster

Min-Max pan size: 110-225.  
 Energy: 7400W  
 Auto Switch off  
 Over Heat Protection  
 Auto Shutdown Protection  
 Power On Indicator



Black Glass €899

**Hoo-B plus FCH32 combinations**



**4 Ring Induction 670 Width**

- 2 x Induction Hob FCH32C
- 1 x Hoo-B Aluminium downdraft



**6 Ring Induction 1050 Width**

- 3 x Induction Hob FCH32C
- 2 x Hoo-B Aluminium downdraft

All extraction rates and noise levels reported are in accordance with IEC standards.

The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECEC **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591

All retail prices include VAT at 23%  
 For technical information log onto [www.fff.ie](http://www.fff.ie)

⚡ = Lead times apply for these models of up to 6 Weeks

Subject to technical modifications and changes to the range without notice



**Fabula**  
FAFA90BG



Finish: Glass/Stainless Steel    Dishwasher Safe Filters  
EVO Touch Controls                LED Light  
Width: 900 mm                        Energy: C Rated

Speed	1	2	3	4	INT
Air m3/h	220	380	450	530	710
Noise dB(A)	46	57	61	65	70

Black Glass €1499

## Induction Hob FCH93

FAP190G †



**NEW**

Finish: Glass  
Touch Controls  
Width: 900 x 350 mm  
9 Power Levels  
Timer 1-99 min  
Booster

Min-Max pan size: 110-265  
Energy: 6700W  
Auto Switch off  
Over Heat Protection  
Auto Shutdown Protection  
Power On Indicator

Black Glass €1099

All extraction rates and noise levels reported are in accordance with IEC standards.

The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECEC **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591



## Ceiling and Island Hoods

A choice of 10 different models for use over islands in the kitchen. Choose from ceiling, island hoods or the innovative F-Light range where the hood lowers down when cooking and retracts when finished.

## Heaven 2.0 Glass

FAHE90WG



Finish: White Glass

Electronic LED Touch Controls

Width: 900 mm

Dishwasher Safe Filters

2 x LED lights

Energy: C rated

Min space requirement 319 mm  
Max height from Worktop 1500 mm

Speed	1	2	3	INT
Air m3/h	360	545	640	740
Noise dB(A)	54	64	68	71

White Glass 900 mm €1,349

## Heaven 2.0

FAHE90SS - 900 mm

FAHE120SS - 1200 mm †



Finish: Stainless Steel

Electronic LED Touch Controls

Width: 900 mm

Dishwasher Safe Filters

2 x LED lights

Energy: C rated

Min space requirement 311 mm  
Max height from Worktop 1500 mm

Speed	1	2	3	INT
Air m3/h	360	545	640	740
Noise dB(A)	54	64	68	71

Stainless Steel 900 mm €979


Stainless Steel 1200 mm €1,029

All extraction rates and noise levels reported are in accordance with IEC standards.

The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECEC **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591

## Heaven 2.0 Flat Glass

FAHEF90WG

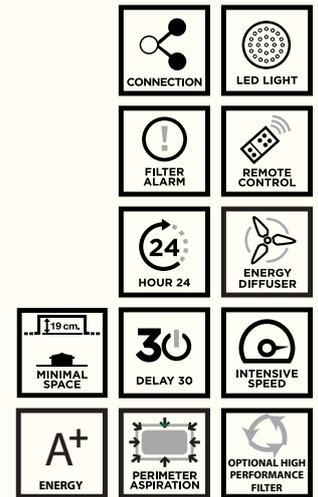

Finish: White Glass

Electronic LED Touch Controls

Width: 900 mm

Dishwasher Safe Filters

2 x LED lights

Energy: A+ rated

**NEW**

Min space requirement 195 mm

Max height from Worktop 1500 mm


Speed	1	2	3	INT
Air m3/h	490	545	615	705
Noise dB(A)	63	66	68	72

White Glass 900 mm €1,419

## Heaven 2.0 Flat

FAHEF90SS - 900 mm

FAHEF120SS - 1200 mm †

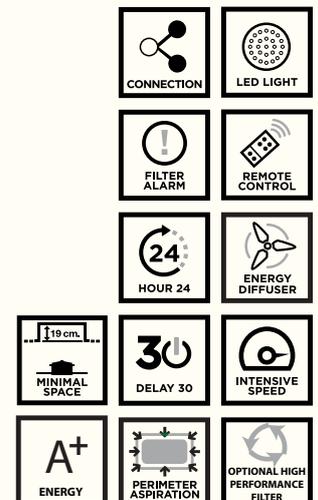

Finish: Stainless Steel

Electronic LED Touch Controls

Width: 900 mm

Dishwasher Safe Filters

2 x LED lights

Energy: A+ rated

**NEW**

Min space requirement 189 mm

Max height from Worktop 1500 mm

Speed	1	2	3	INT
Air m3/h	490	545	615	705
Noise dB(A)	63	66	68	72

Stainless Steel 900 mm €1,019

Stainless Steel 1200 mm €1,099

All extraction rates and noise levels reported are in accordance with IEC standards.

The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECEC **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591

All retail prices include VAT at 23%  
For technical information log onto [www.fff.ie](http://www.fff.ie)

† = Lead times apply for these models of up to 6 Weeks

Subject to technical modifications and changes to the range without notice

## High-Light Matt White

FAHI91WG †



Finish: White Glass

Electronic LED Touch Controls

Width: 910 mm

Dishwasher Safe Filters

Perimeter LED light

Energy: A+ rated

**NEW**

Min space requirement 188 mm

Max height from Worktop 1500 mm

Speed	1	2	3	INT
Air m3/h	415	490	550	710
Noise dB(A)	63	65	68	71

White Matt 910 mm €1,499

## High-Light

FAHI91SS - 910 mm †

FAHI121SS - 1210 mm †



Finish: Stainless Steel

Electronic LED Touch Controls

Width: 910 mm

Dishwasher Safe Filters

Perimeter LED light

Energy: A+ rated

**NEW**

Min space requirement 188 mm

Max height from Worktop 1500 mm

Speed	1	2	3	INT
Air m3/h	415	490	550	710
Noise dB(A)	63	65	68	71

Stainless Steel 910 mm €1,399

Stainless Steel 1210 mm €1,499

All extraction rates and noise levels reported are in accordance with IEC standards.

The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECEC **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591



**SkyPad 2.0**

FASK120SSWG †



Includes carbon filter  
 No false ceiling or ducting required  
 Max height from Worktop 1500 mm

\* No energy data as SkyPad only works in recycle mode

Finish: Stainless Steel/Glass  
 Electronic Controls  
 1200 x 700 mm

Dishwasher Safe Filters  
 2 x LED lights  
 Energy: N/A\*

Speed	1	2	3	INT
Air m3/h	440	600	780	850
Noise dB(A)	57	64	70	72

**Stainless Steel / White Glass 1,200 mm €1,649**

All extraction rates and noise levels reported are in accordance with IEC standards. The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECEC **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/ EN 61591

All retail prices include VAT at 23%  
 For technical information log onto [www.fff.ie](http://www.fff.ie)

† = Lead times apply for these models of up to 6 Weeks

Subject to technical modifications and changes to the range without notice

## Tratto Island

FATRI90SSG



Finish: Glass/Stainless Steel      Dishwasher Safe Filters  
 Electronic Controls                  4 x LED lights  
 Width: 900 mm                          Energy: C rated

Speed	1	2	3	INT
Air m3/h	255	395	540	650
Noise dB(A)	45	56	63	69

900 mm €699

## Stilo Island

FASAI90SS




Finish: Stainless Steel                  Dishwasher Safe Filters  
 Electronic Controls                  4 x LED lights  
 Width: 900 mm                          Energy: C rated

Speed	1	2	3	INT
Air m3/h	315	480	610	685
Noise dB(A)	54	62	67	70

900 mm €899

## T Light Island

FATLI100SS †

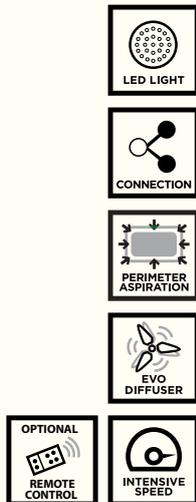

**NEW**

Finish: Stainless Steel                  Dishwasher Safe Filters  
 Soft Touch Controls                  Perimeter LED Light  
 Width: 1000 mm                          Energy: A rated

Speed	1	2	3	INT
Air m3/h	260	380	525	635
Noise dB(A)	56	65	70	72


1000 mm €1,199



All extraction rates and noise levels reported are in accordance with IEC standards.

The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECEC **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591

## Vertigo FAVE52SS †

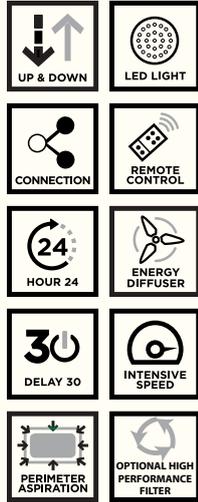

Finish: Stainless Steel      Dishwasher Safe Filters  
 Electronic Touch Controls      4 x LED Lights  
 Width: 520 mm diameter      Energy: C rated

Speed	1	2	3	INT
Air m3/h	230	345	450	520
Noise dB(A)	49	60	65	68

520 mm €1,429

## Vanilla FAVA52SSWG †




Finish: Glass/Stainless Steel      Dishwasher Safe Filters  
 Electronic Touch Controls      4 x LED Lights  
 Width: 520 mm diameter      Energy: C rated

Speed	1	2	3	INT
Air m3/h	230	345	450	520
Noise dB(A)	49	60	65	68

520 mm €1,749

## Kaleidos FAKA60SSBF †

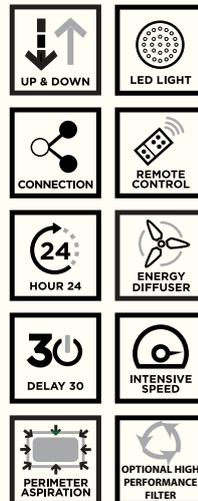

Finish: Stainless Steel/Fabric      Dishwasher Safe Filters  
 Electronic Touch Controls      4 x LED Lights  
 Width: 600 mm diameter      Energy: C rated


Speed	1	2	3	INT
Air m3/h	230	345	450	520
Noise dB(A)	49	60	65	68

520 mm €1,639

All extraction rates and noise levels reported are in accordance with IEC standards.

The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECEC **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591



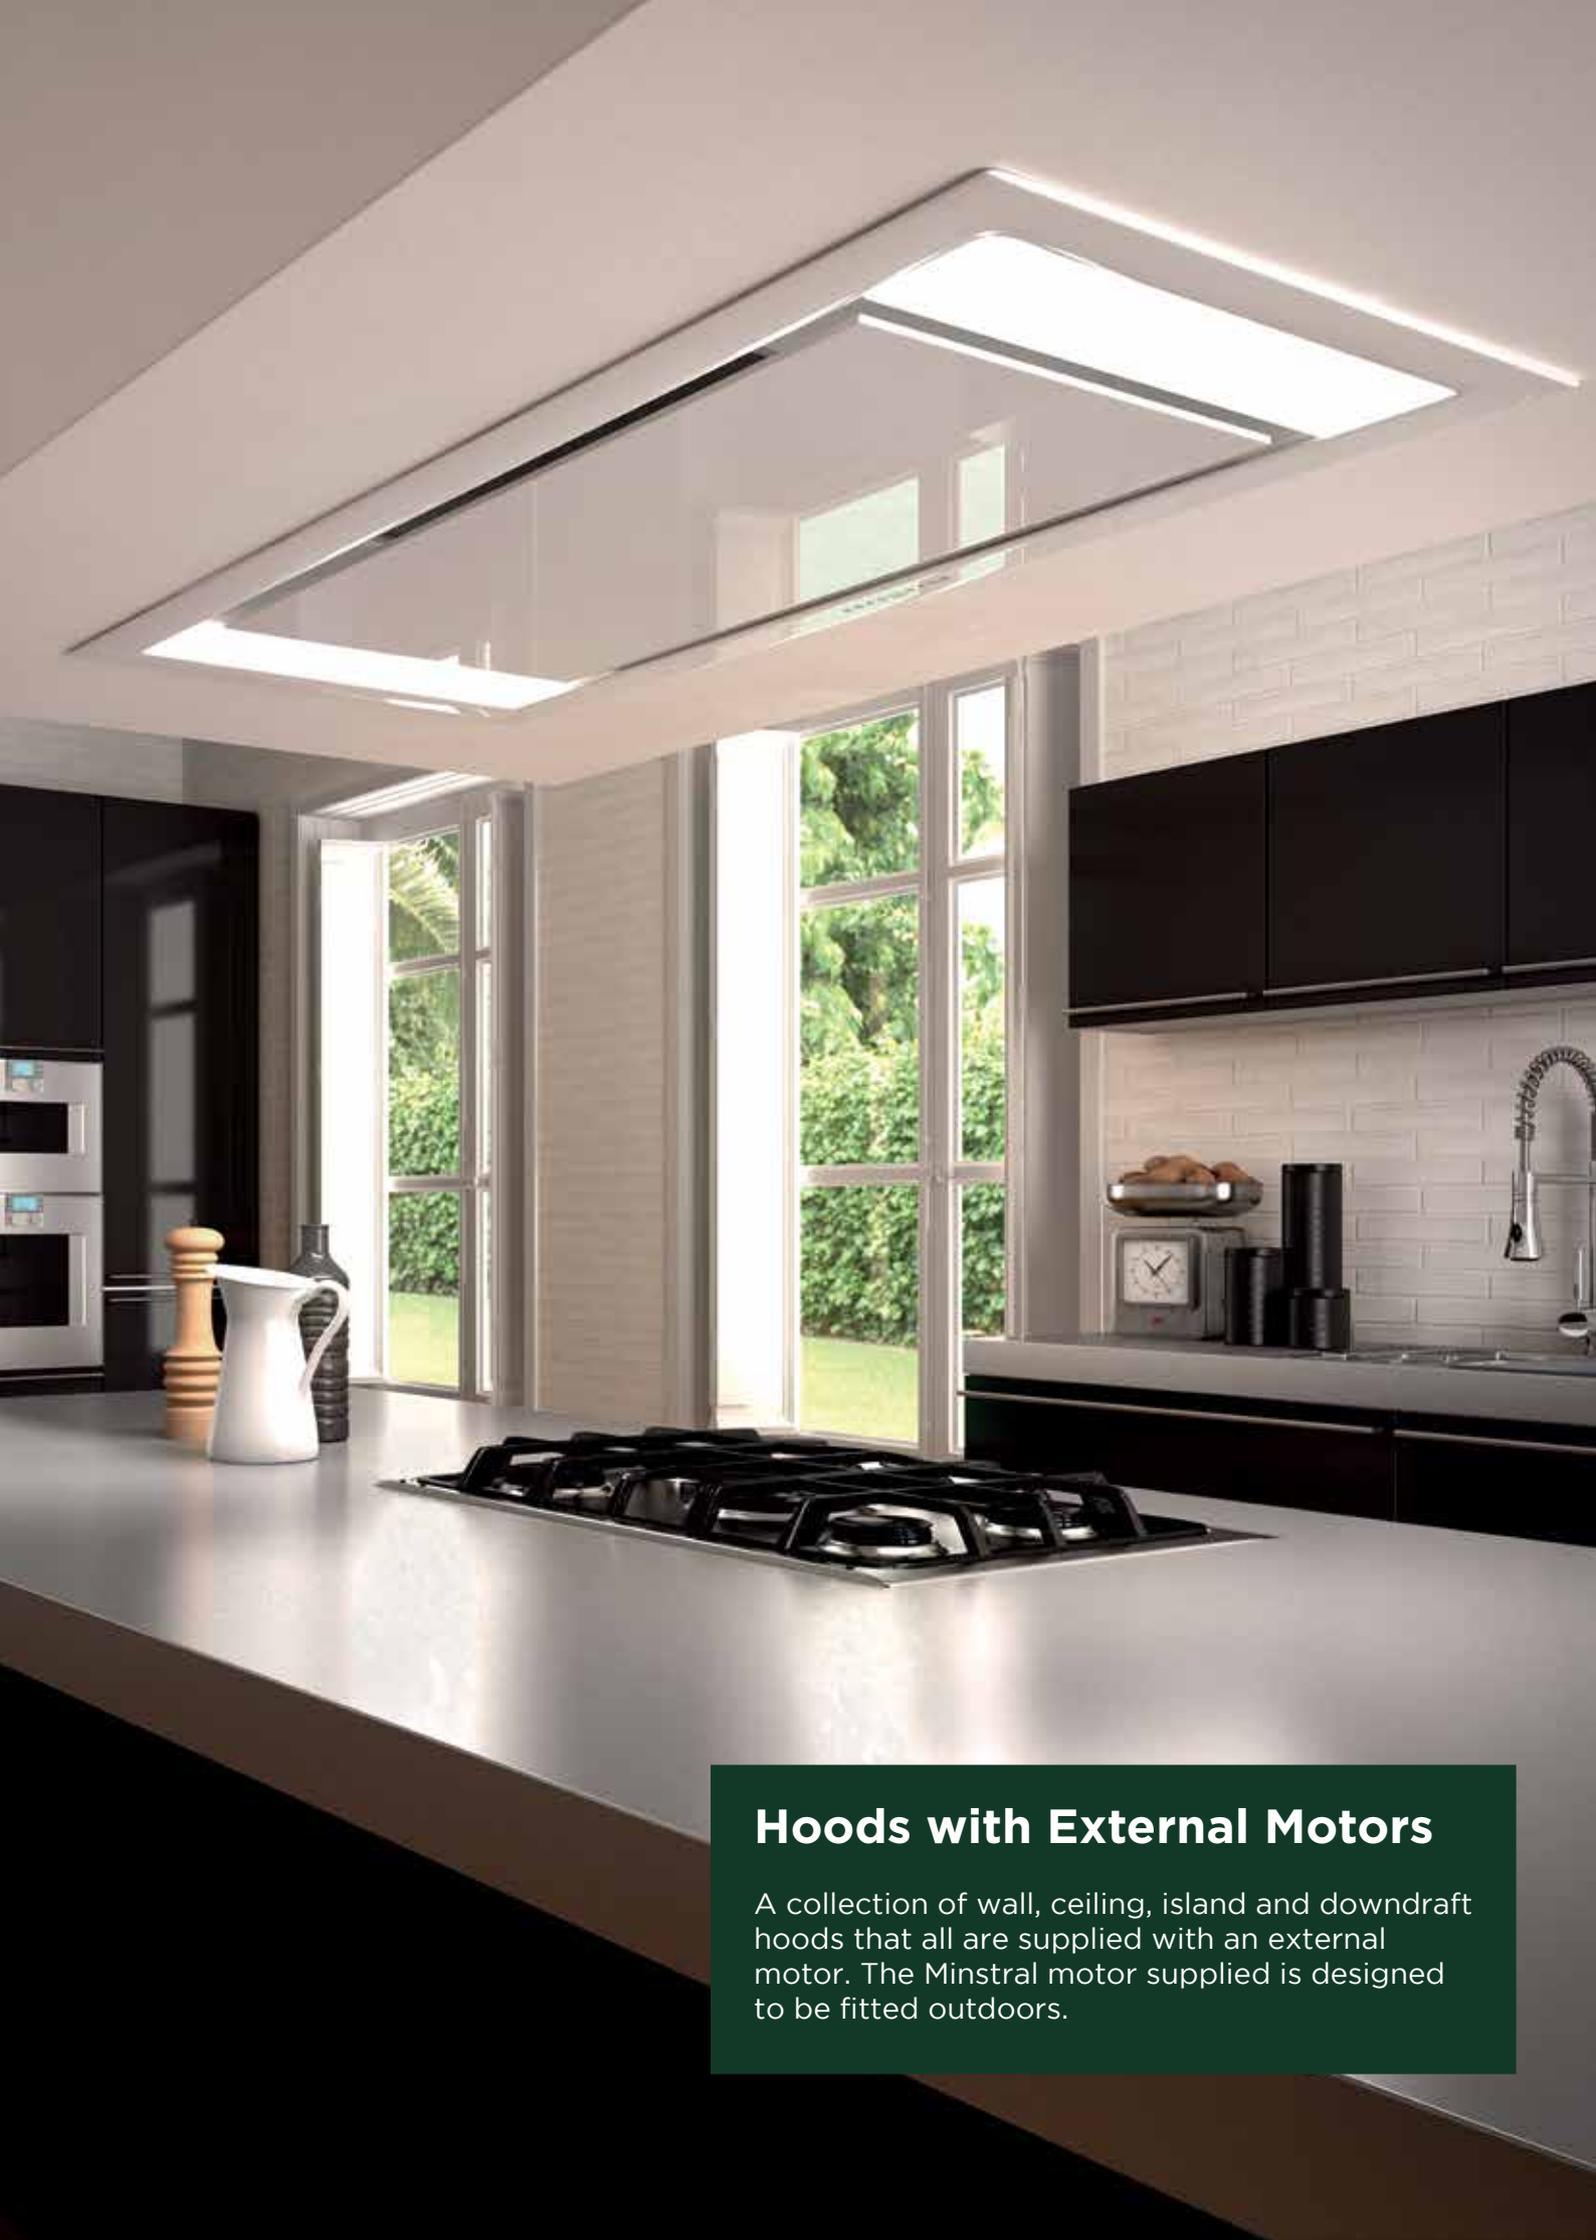


## Hoods with External Motors

A collection of wall, ceiling, island and downdraft hoods that all are supplied with an external motor. The Minstral motor supplied is designed to be fitted outdoors.

## Heaven with External Motor

FAHE90WGEM - White Glass †

FAHE90SSEM - Stainless Steel †

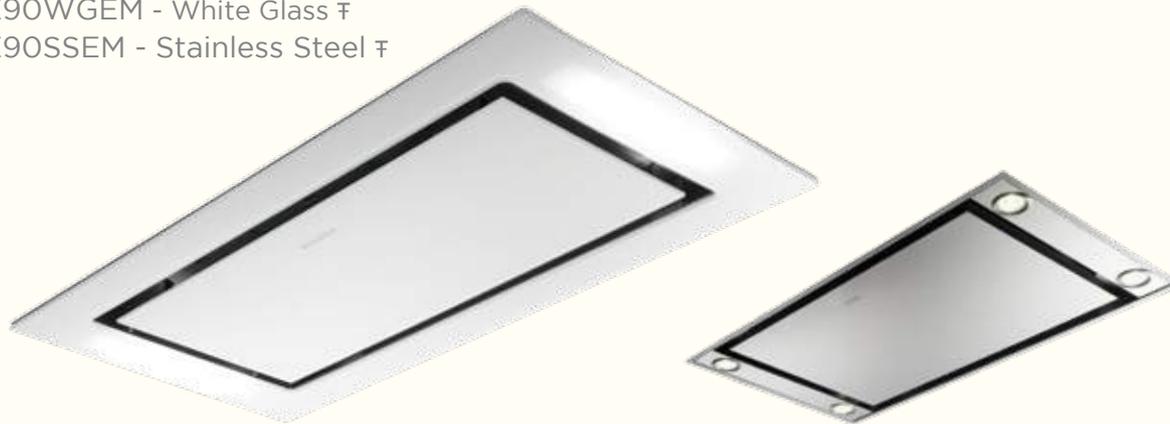

Finish: White Glass / S-Steel

Electronic LED Controls

Width: 900 mm

Dishwasher Safe Filters

4 x LED lights


Energy: B rated

Includes remote external motor

Speed	1	2	3	INT
Air m3/h	280	380	440	520
Noise dB(A)	53	61	66	68

Stainless Steel 900 mm €1,499

White Glass 900 mm €1,899

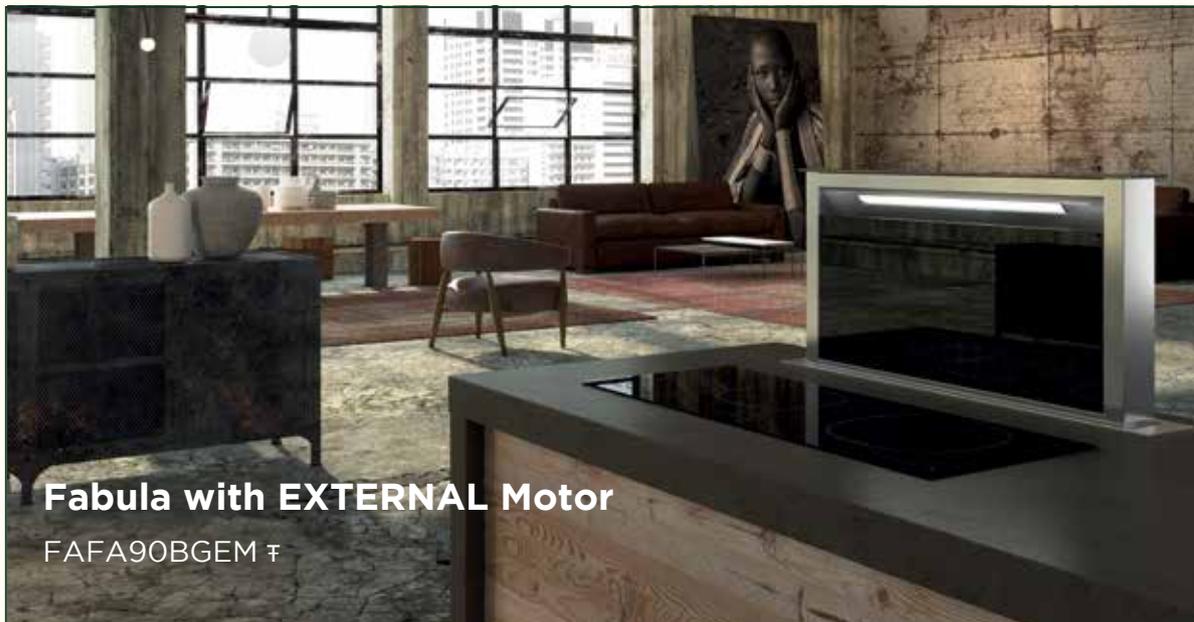

## Fabula with EXTERNAL Motor

FAFA90BGEM †



Includes remote external motor

Finish: Glass/Stainless Steel

EVO Touch Controls

Width: 900 mm

Dishwasher Safe Filters

LED Light

Energy: B Rated

Speed	1	2	3	INT
Air m3/h	280	370	440	530
Noise dB(A)	55	64	67	69

900mm €2,119

All extraction rates and noise levels reported are in accordance with IEC standards.

The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECEC **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591

### Jolie with External Motor

FAJO80BGEM - 800 mm ƒ



Finish: Glass Dishwasher Safe Filters  
 LED Electronic Controls 2 x LED lights  
 Width: 800 mm Energy: B rated

Speed	1	2	3	INT
Air m3/h	280	370	440	530
Noise dB(A)	55	64	67	69

Black Glass €1,339

### Ray with External Motor

FARA90SSEM - 900 mm ƒ



Finish: Glass/Stainless Steel Dishwasher Safe Filters  
 LED Electronic Controls 2 x LED Lights  
 Width: 900 mm Energy: B rated

Speed	1	2	3	INT
Air m3/h	290	390	455	540
Noise dB(A)	54	58	62	67

900 mm €989

### Stilo with External Motor

FASE90SSEM - 900 mm ƒ



Finish: Stainless Steel Dishwasher Safe Filters  
 LED Electronic Controls 2 x LED lights  
 Width: 900 mm Energy: B rated

Speed	1	2	3	INT
Air m3/h	290	390	455	540
Noise dB(A)	54	58	62	67

900 mm €1,029

### Stilo Island with External Motor

FASAI90SSEM - 900 mm ƒ



Finish: Stainless Steel Dishwasher Safe Filters  
 LED Electronic Controls 4 x LED lights  
 Width: 900 mm Energy: B rated

Speed	1	2	3	INT
Air m3/h	290	390	455	540
Noise dB(A)	54	58	62	67

900 mm €1,399

All extraction rates and noise levels reported are in accordance with IEC standards.

The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECEC **Code of Conduct** which establishes **clear rules of measurement** common to all cooker hood manufacturers IEC/EN 61591

All retail prices include VAT at 23%  
 For technical information log onto [www.fff.ie](http://www.fff.ie)

ƒ = Lead times apply for these models of up to 6 Weeks

Subject to technical modifications and changes to the range without notice

Please note that all extraction rates and noise levels reported are in accordance with IEC standards. The IEC Airflow rate is the 2010 certified testing of Cooker Hoods with 1 meter of ducting and 90° angle bend in accordance with CECED Code of Conduct. The CECED Code establishes clear rules of measurement common to all cooker hood manufacturers IEC/EN 61591. Please ensure that any cooker hoods you make look at comply with the code of conduct to make an accurate comparison.



## Ducting Kits

In order to achieve the highest extraction rates a ducting kit should be used. Extraction rates will drop and noise levels will change when the hood is used in recycle mode with filters. All hoods in this brochure can be vented or used in a recycle mode.

Ducting Code	Description	RRP
F02DK120	2 mtr. 120 mm Ø Flexible ducting, External Vent White, 2 x fixing clips	€17

## Charcoal Filters - Standard

Where venting is not possible, use of charcoal filters allows the air to be recycled. Charcoal filters reduce extraction rate by 40% and last up to 3 months. Charcoal filters are available to suit whichever cooker hood you choose. To order replacement filters simply call us on + 353 1 844 8400

Filter Code	Cooker Hood	RRP	
F01CF01	Bella, Gemma, Glove, Look, Nice, Ray, Stilo, Stilo Island, Stilux, T-Light, T-Light island, Tratto Island, Victory, Victory 2.0	€30	
F01CF02	Black Tie, Cocktail, Cocktail XS, City, Daisy, Glam Light, Heaven 2.0, Heaven glass, In-Light, Inca Lux, Inca Lux Glass, Infinity, Jolie, Kaleidos, Maxima, Northia, Scigno, Skypad, Steelmax, Strip, Solaris, Vanilla, Vertigo	€34	
F01CF03	104, 2104, 2108 (Order 2 for twin Motors)	€12	
F01CF04	Inca Plus,	€25	
F01CF05	Omnia	€34	
F01CF08	Flexa, Flexa HIP, Vesta, Inca Smart HC, Inca Smart	€22	
F01CF09	Fabula and Hoo-B Downdraft	€125	
F01CF10	Luft	€60	
F01CF11	Heaven 2.0 Flat 90, Heaven 2.0 Flat Glass 90, High-Light 910	€99	
F01CF12	Heaven 2.0 Flat 120, High-Light 1210	€129	

## Special Filter Holder

The filter holder ensures humidity does not remain in the cabinet

Filter Code	Cooker Hood	RRP	
F01CF13	Fabula and Hoo-B Downdraft including filter, replacement filters F01CF09 in table above	€170	

## Charcoal Filters - High Performance

Several hoods have High performance filters available to suit. These special Charcoal filters only reduce extraction rate by 15% and last up to 6 months..

Filter Code	Cooker Hood	RRP	
F01CF02HP	Black Tie, Cocktail, Cocktail XS, City, Daisy, Glam Light, Heaven 2.0, Heaven glass, In-Light, Inca Lux, Inca Lux Glass, Infinity, Jolie, Kaleidos, Maxima, Northia, Scrigno, Steelmax, Strip, Solaris, Talika, Vanilla, Vertigo	€50	
F01CF04HP	Skypad	€128	

## HFH Filter - Premium Performance

HFH filters only reduce extraction rate by 5% and they can be washed in the diswasher up to five times.

Filter Code	Cooker Hood	RRP	
F01HFH01	HFH kit including filter for; Bella, Gemma, Look, Nice, Ray, Stilo, Stilux, T-Light, T-Light island,	€245	
F01HFH01R	Replacement filter for HFH kit	€159	

## Hood Cap

For use with hoods in recycle mode without chimney. Deflects exhaled air from hitting the ceiling and prevents dirt from falling into the motor.


Filter Code	Cooker Hood	RRP	
F05HC1	Black Tie, Cocktail, Cocktail XS, City, Daisy, Glam Light, Infinity, Jolie, Northia, Steelmax.	€26	

## Remote Control

Filter Code	Cooker Hood	RRP	
F05RC1	Black Tie, Glam Light, Heaven 2.0, Heaven Flat, High-Light, Hoo-b, In-Light, Inca Lux, Infinity, Kaleidos, Look, Luft, SkyPad, T-Light, T-Light Island, Talika, Vanilla, Vertigo	€60	

## Remote Blower

The ability to install the motor away from the hood frees it from architectural constraints and reduces noise in the kitchen. Motor can be installed up to 7 metres from the hood.

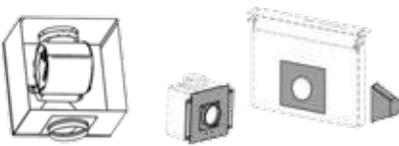Filter Code	Cooker Hood	RRP	
F10RB01	Bella, City, Daisy, Gemma, Glove, Heaven, Heaven Glass, Inca Lux, Inca Lux Glass, Infinity, Jolie, Maxima, Nice, Ray, Stilo, Stilux, Strip, Tratto island	€199	
F10RB02	Fabula	€149	




## Silent Kit

Reduces the perceived sound by up to 25%\* Washable sound-absorbing cushions which sound proof the hood.  
 \*Equal to a reduction of 3dB(A) according to norm EN 60704-3.

Code	Cooker Hood	RRP	
F04SK1	Bella, Gemma, Nice, Premio, Ray, Stilo, Stilux, Tratto island,	€105	



## Splashbacks

High Quality Stainless Steel Splashbacks for 60 and 90 cm wide hoods

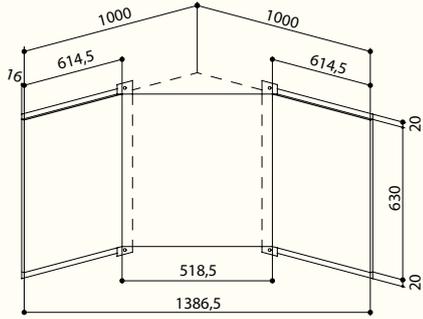
Code	Cooker Hood	RRP	
F06W6063	60 cm Bella, Gemma, Glove, Stilo, Stilux, Strip, Vesta	€69	
F06W9063	90 cm Bella, Gemma, Glove, Look, Stilo, Stilux, Strip, T-Light Vesta	€109	
F06W1001	100 cm Solaris Corner	€249	

# Chimneys


Extra height Chimneys for high ceilings - Lead times of 6 weeks apply

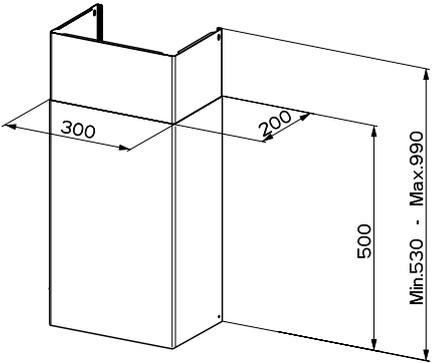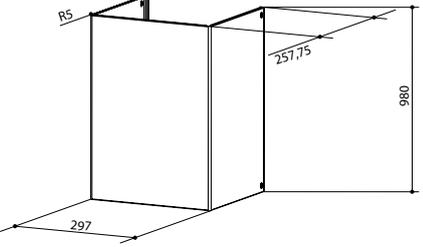Code	Cooker Hood	RRP	
F03W290B	Chimney for Cocktail Black	€60	
F03W846W	Chimney for Cocktail White	€60	
F03W01SS †	High Chimney Stainless Steel for; Black Tie, Infinity, Jolie	€60	
F03W02 †	Bella, Gemma, Glove, Look, Nice, Ray Stilo, Stilux	€95	


**104/2104**

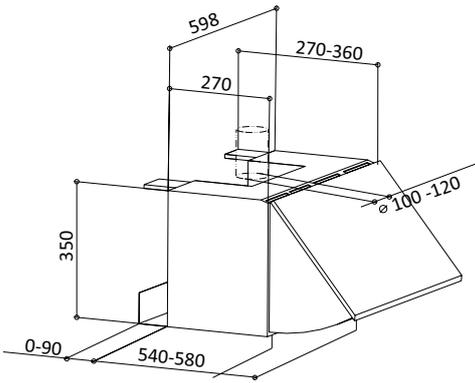


**2108**

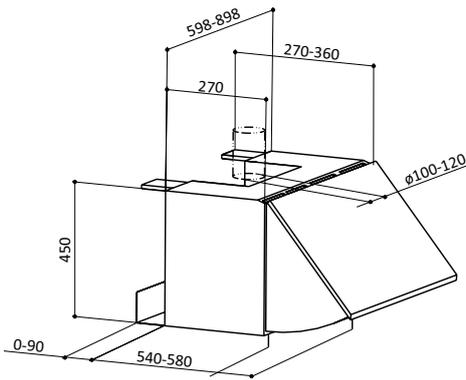


**Scrigno**

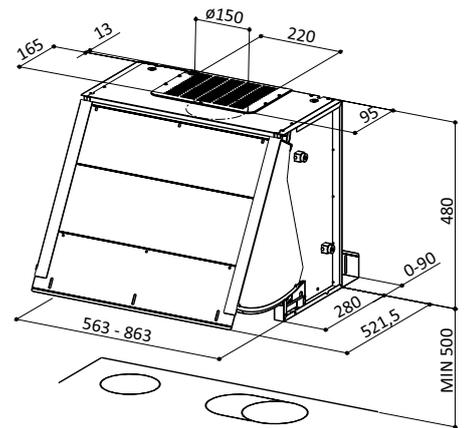


**Flexa**

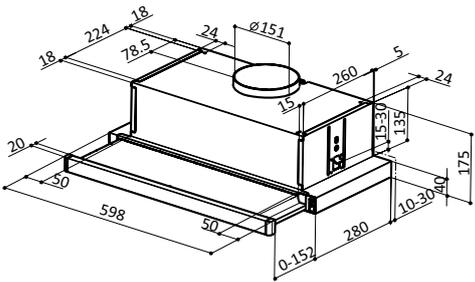


**Flexa Hip**

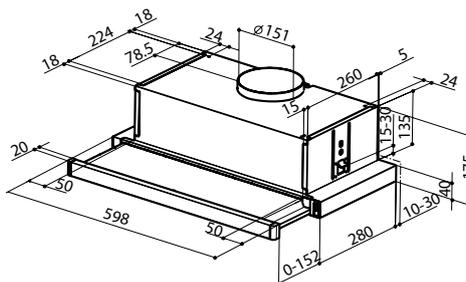


**Omnia**

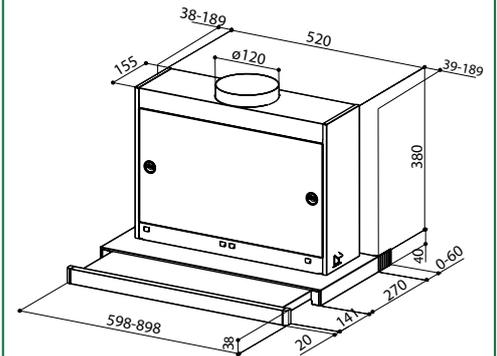


**Maxima**

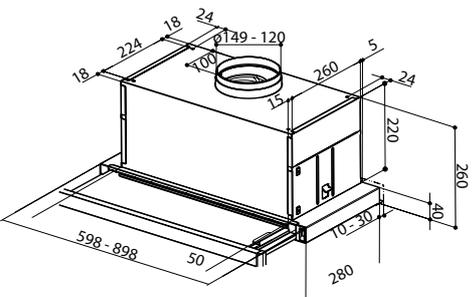


**Inca Smart**

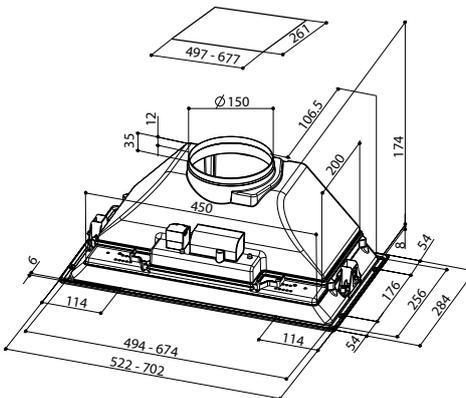


**Inca Smart HC**

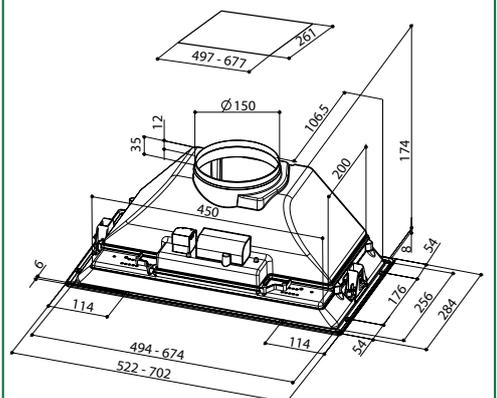


**Inca Plus**

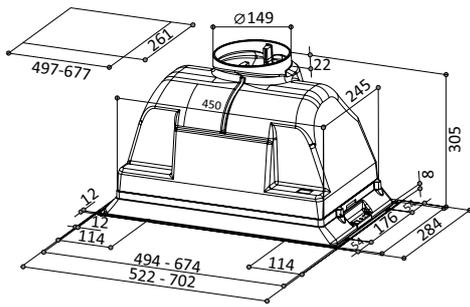


**Inca Lux 2.0**

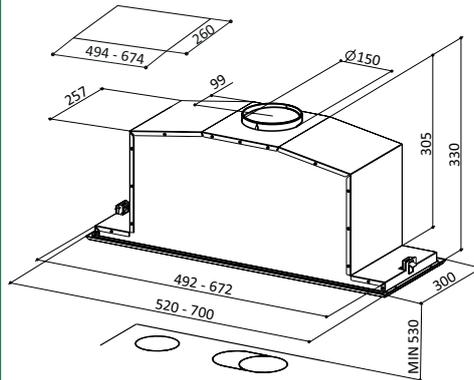


**Victory**

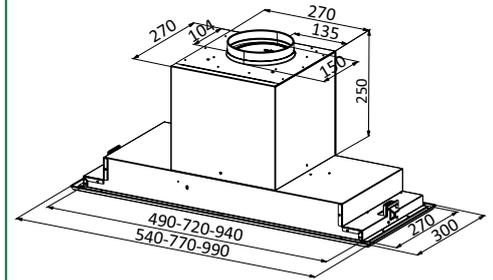


**Victory 2.0**

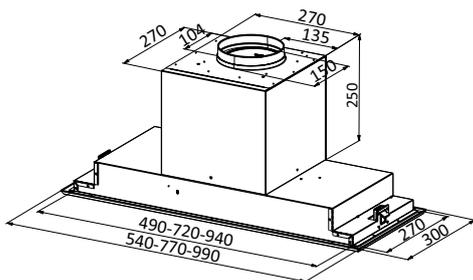


**Inca Lux Glass**

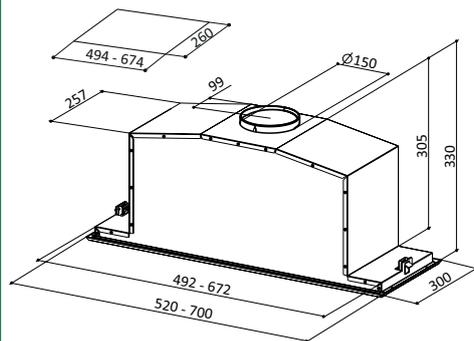


**In-Light**

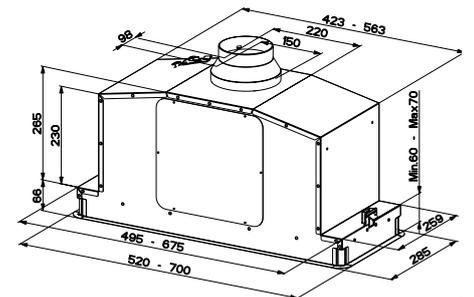


**Vesta**

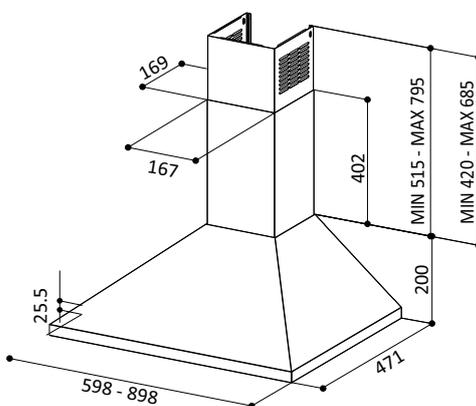


**Strip**

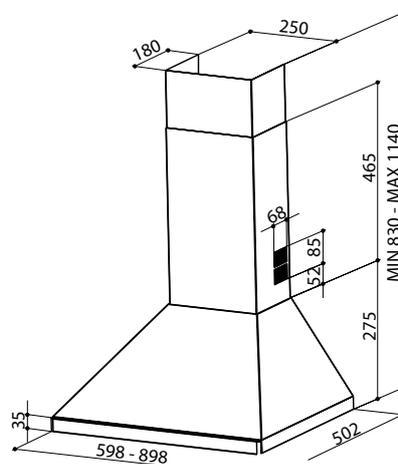


**Gemma**

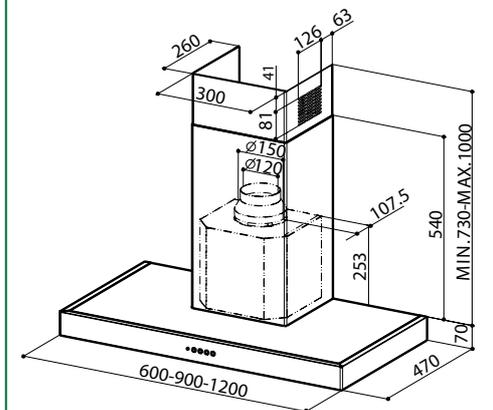


## Ray

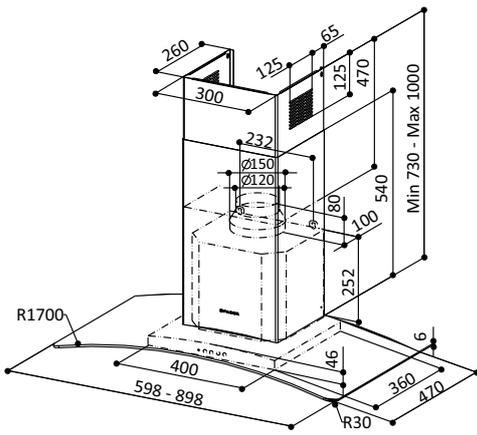


## Nice

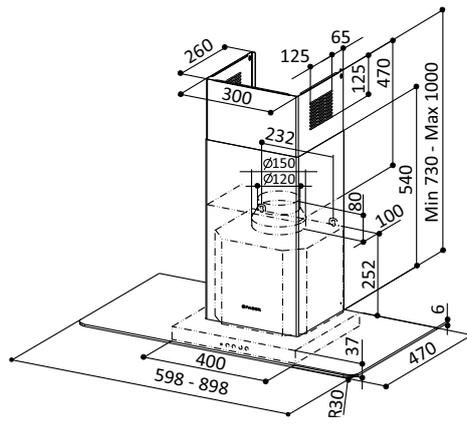


## Stilo

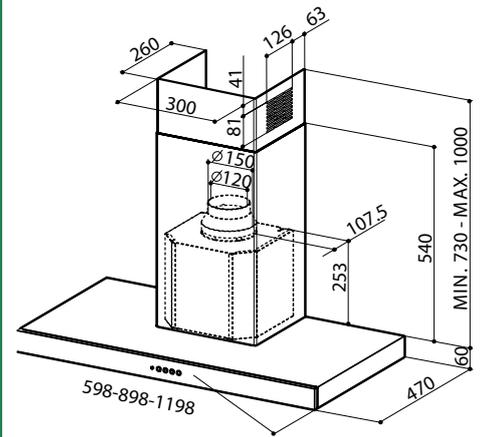


## Glove

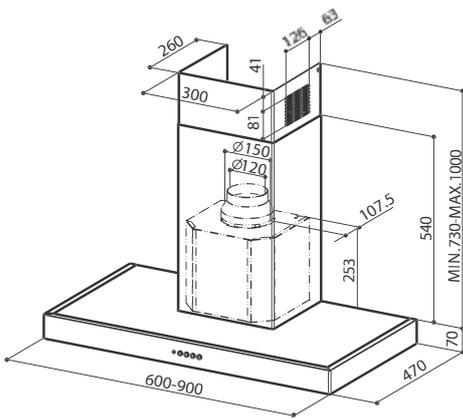


## Bella

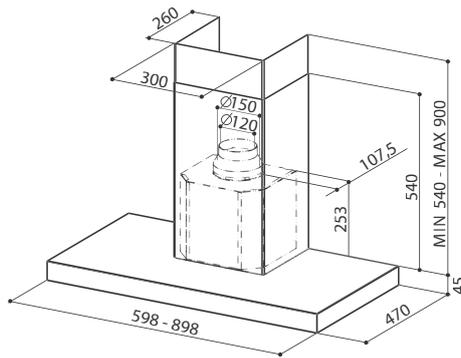


## Stilux

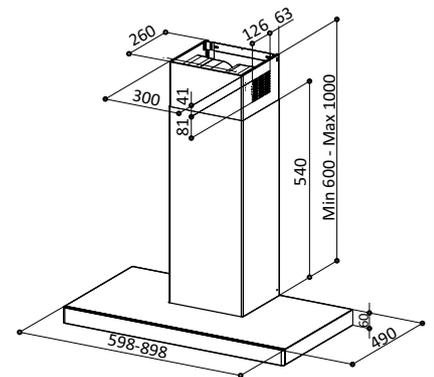


## Look

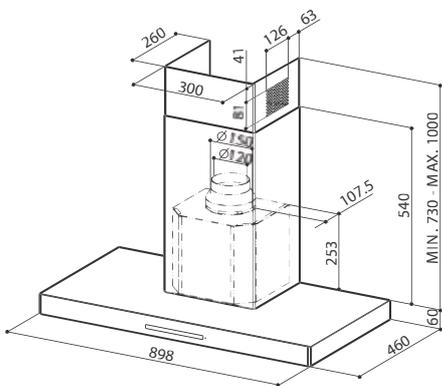


## T-Light

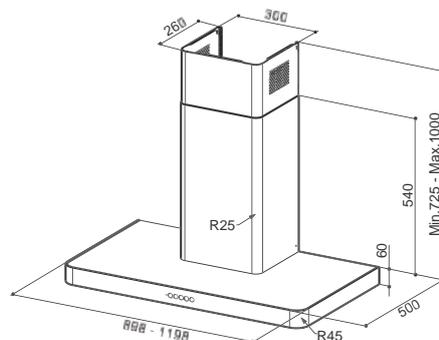


## Luft

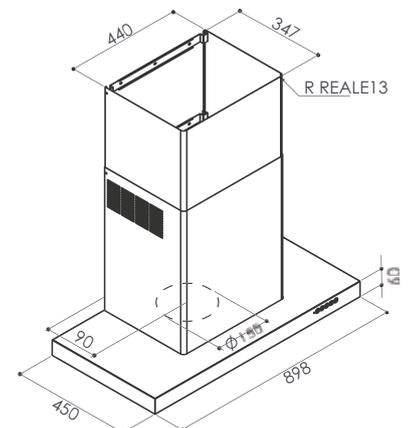


**Solaris**

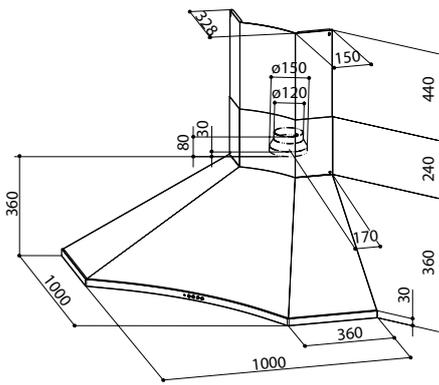


**Daisy**

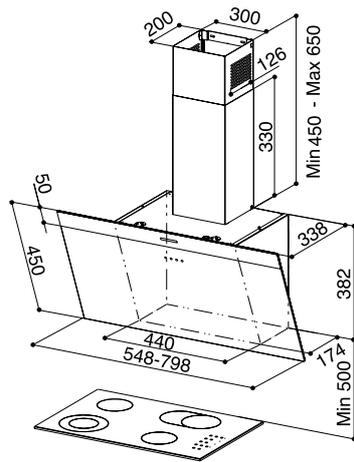


**Steelmax**

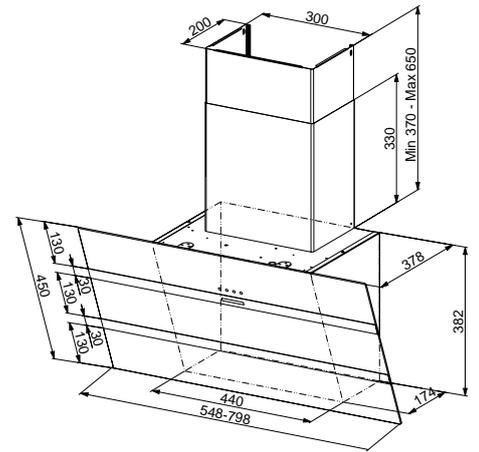


**City**

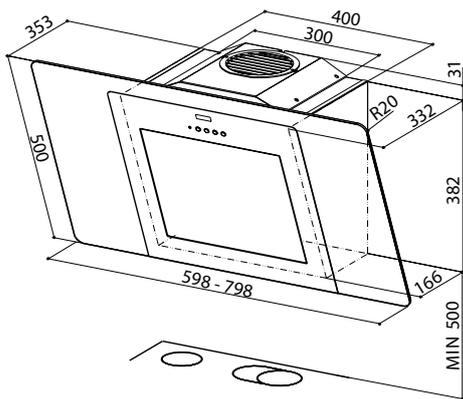


**Cocktail**

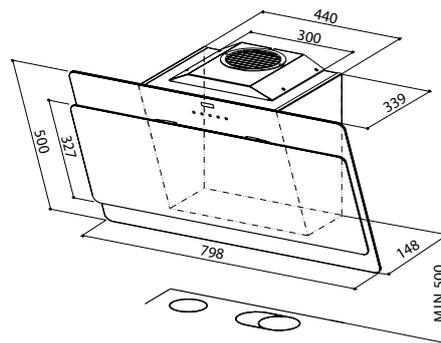


**Cocktail XS**

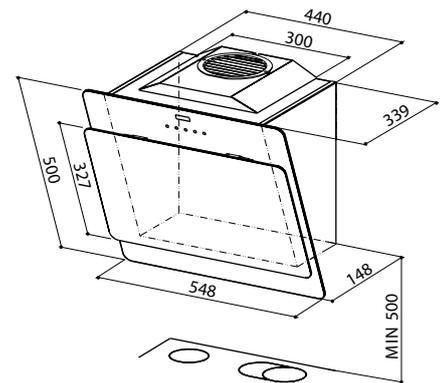


**Glam-Light**

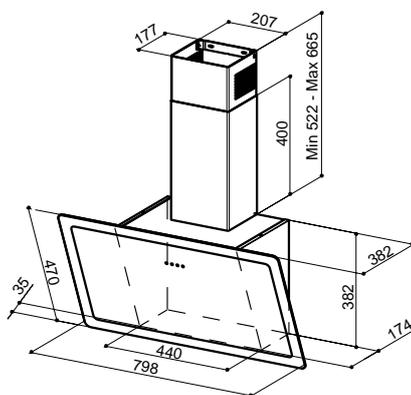


**Northia**

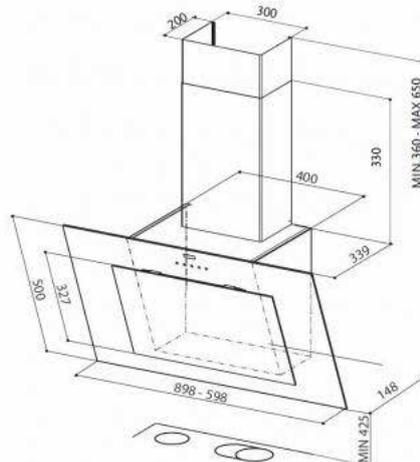


**Jolie**

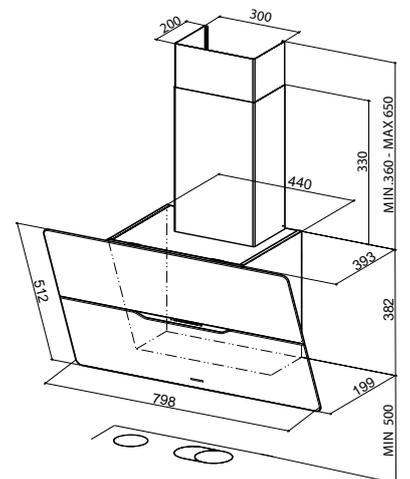


## Black Tie

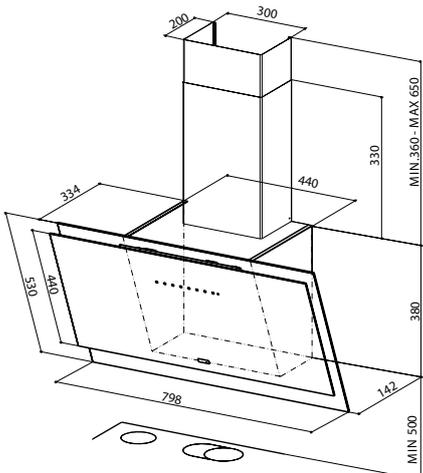


## Infinity

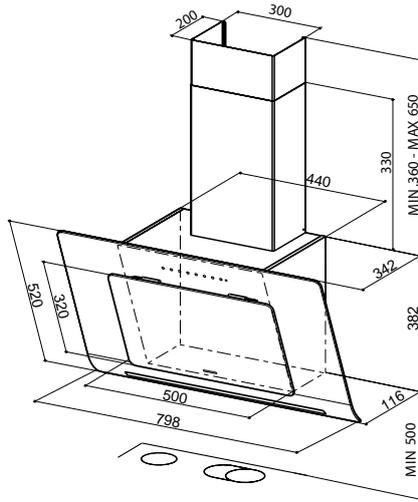


## Talika

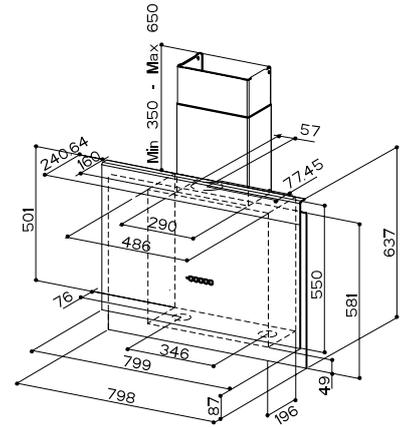


## Hoo-B Glass/Alu

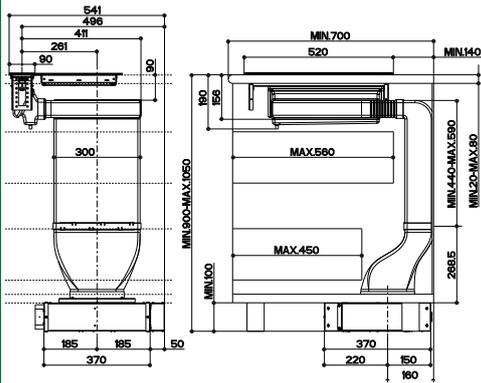


## FCH32 Hob/Alu

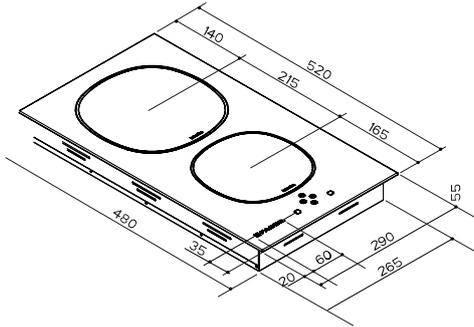


## FCH64 Hob

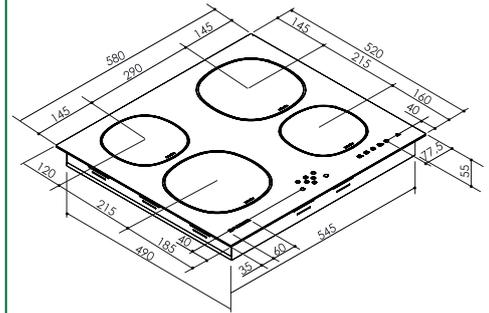


## Fabula

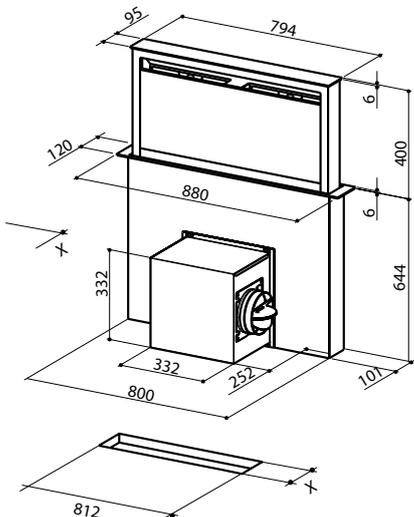


## FCH93 Hob

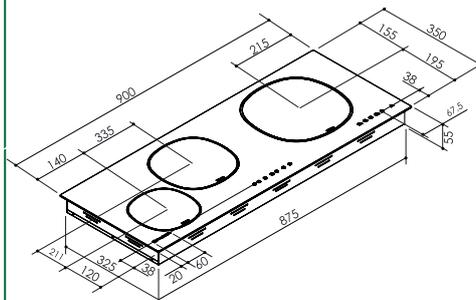


## Heaven 2.0 Glass

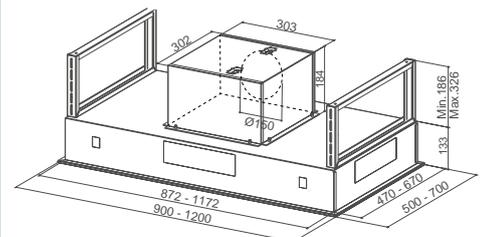


**Heaven 2.0**

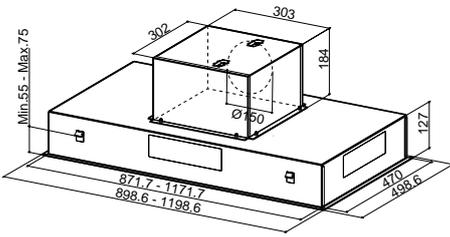


**Heaven 2.0 Flat Glass**

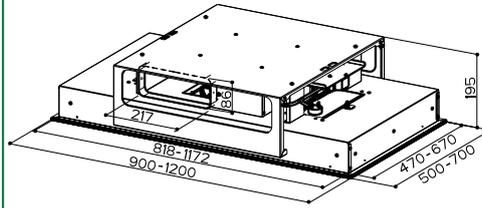


**Heaven 2.0 Flat**

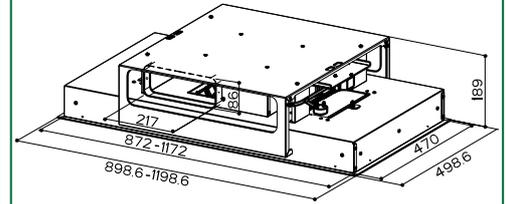


**High-Light White**

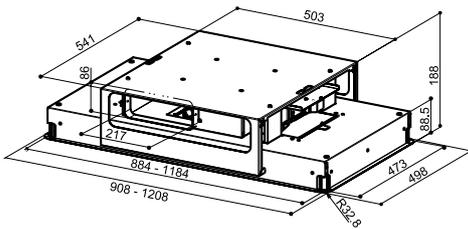


**High-Light**

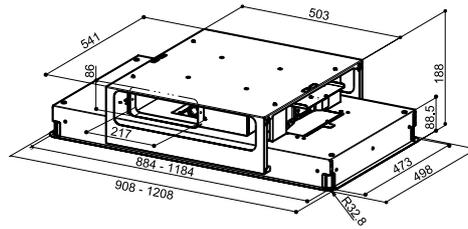


**Skypad 2.0**

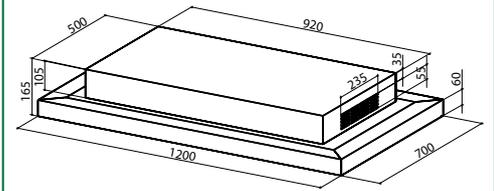


**Tratto Island**

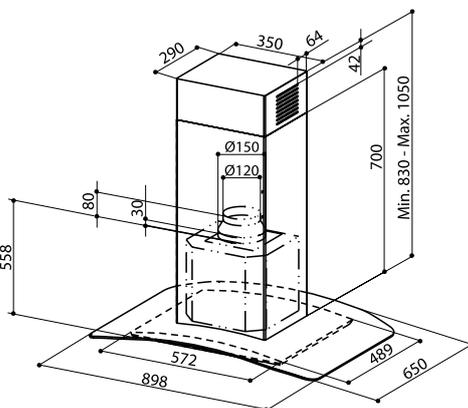


**Stilo Island**

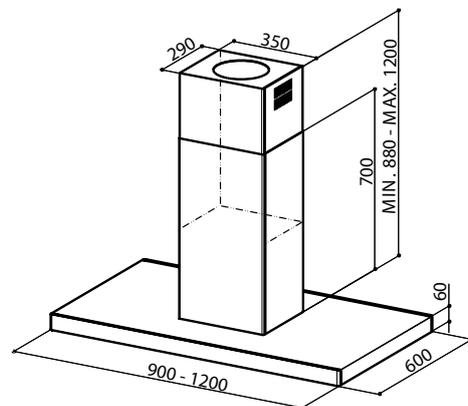


**T Light Island**

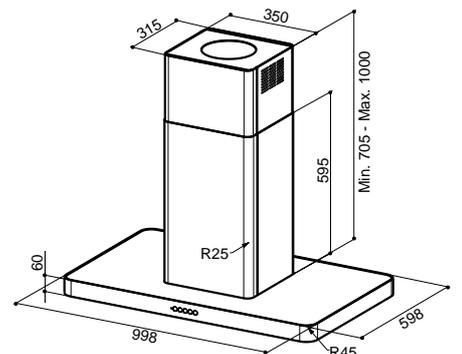


## Vertigo

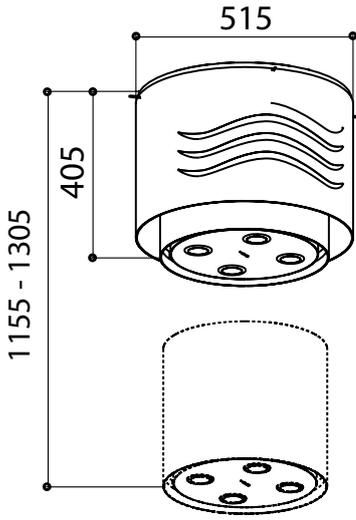

## Vanilla

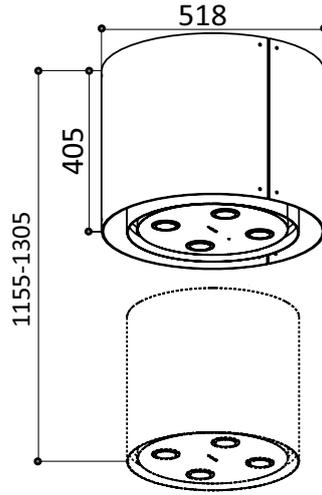

## Kaleidos

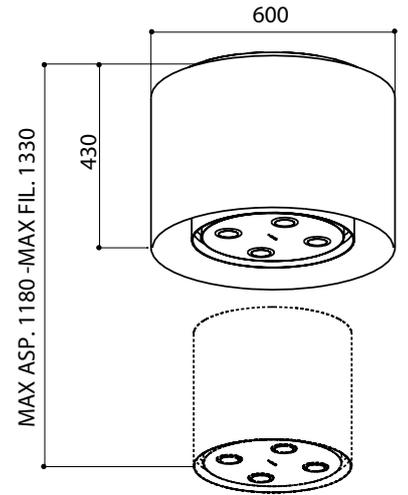





If you wish to view the range of Faber Hoods, why not visit our showroom and advisory centre, simply contact us to make an appointment



Free parts  
guarantee

For a service call please email:  
[sales@awsappliancespares.co.uk](mailto:sales@awsappliancespares.co.uk)

or call: 00 44 (0)1603 412324



Flanagan Fittings  
Falcon House  
Dublin Airport Logistics Park  
St. Margarets  
Co. Dublin  
K67 F303  
Ireland.

Telephone  
+353 (0)1 844 8400

Fax  
+353 (0)1 844 8009

E-mail  
[sales@fff.ie](mailto:sales@fff.ie)

Web  
[www.fff.ie](http://www.fff.ie)

 Find us on  
Facebook [FlanaganFittings](https://www.facebook.com/FlanaganFittings)

 [@flanaganfits](https://twitter.com/flanaganfits)

 [FlanaganFittings](https://www.instagram.com/FlanaganFittings)

 [FlanaganFittings](https://www.pinterest.com/FlanaganFittings)

