






SURFACE / RECESSED LIGHTS

Programme	Page Nr.
Tri-Tone Lights	5.01
Surface SLS Lights	5.02
Surface LED Lights	5.04
Surface / Recessed SLS	5.05



FLEXI STRIP

Programme	Page Nr.
Viva / Compact	5.06
Primo / Duoflex	5.07
RGB / Sigma	5.08
Quantum / Aluminium Profiles	5.09

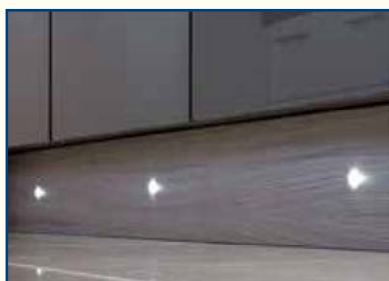

PLINTH LIGHTS

Programme	Page Nr.
Puro LED	5.10
Specto LED	5.10
LUCE SLS	5.11
Nimbus IP65	5.11



GENERAL LIGHTING

Programme	Page Nr.
Under cabinet	5.12
Over Cabinet	5.13
Drawer Lights	5.14
Rechargeable Lights	5.15



SENSIO POWER

Programme	Page Nr.
SensioPod / SensioPod+	5.16
Sensio Power U / SensioPod Bluetooth	5.17
Sensio Power R	5.18
Qi charger	5.18



CONTROLS DIMMERS AND DRIVERS

Programme	Page Nr.
Remote control / Multi Light App	5.19
Moda / Cannon Dimmer switches	5.20
Drivers	5.21
Flexi Strip accessories	5.21

TRITONE HYPE

- One light, three whites: warm, natural and cool white
- All three desired colour temperatures can be achieved from a single fitting. No need to stock multiple parts
- Choose the LED colour you prefer prior to installation. Please note; all fittings will be pre-set to warm white
- If you decide the LED colour choice is wrong after installation simply remove the LED centre and select a different LED colour
- Full range of switches and dimmers. See page 5.19 - 5.20
- Optional 2.5 mtr extension cable Art. Nr. SE9009.
- Surface/recess light with collar supplied
- Diffused LED' so no individual LED diodes can be seen
- 50% brighter than the previous SLS Hype and Bermuda fittings.
- Long lamp life of 35,000 hours

**TRITONE HYPE**

LED Colour	Lumens	2 Light Kit	3 Light Kit	4 Light Kit	5 Light Kit	6 Light Kit
Cool, Natural or Warm white	130-150 lm	SE21092C2	SE21092C3	SE21092C4	SE21092C5	SE21092C6

Note: Each light kit c/w driver, each lamp with 1.5 mtr cable

TRITONE BERMUDA

- One light, three whites: warm, natural and cool white
- All three desired colour temperatures can be achieved from a single fitting. No need to stock multiple parts
- Choose the LED colour you prefer prior to installation. Please note; all fittings will be pre-set to warm white
- If you decide the LED colour choice is wrong after installation simply remove the LED centre and select a different LED colour
- Full range of switches and dimmers. See page 5.19 - 5.20
- Optional 2.5 mtr extension cable Art. Nr. SE9009.
- Surface/recess light with collar supplied
- Diffused LED' so no individual LED diodes can be seen
- 50% brighter than the previous SLS Hype and Bermuda fittings.
- Long lamp life of 35,000 hours

**ORA HD LED**

LED Colour	Lumens	2 Light Kit	3 Light Kit	4 Light Kit	5 Light Kit	6 Light Kit
Cool White	135 lm	SE9007HDCW2	SE9007HDCW3	SE9007HDCW4	SE9007HDCW5	SE9007HDCW6

Note: Each light kit c/w driver, each lamp with 2.5 mtr cable



PAD2

- Extra bright with up to 308 lumens
- Silver finish with either cool or warm white LED
- Prismatic SLS Lighting; no diodes appear on light surface
- 35,000 hour lamp life
- Full range of switches and dimmers. See page 5.19 - 5.20
- Optional 2.5 mtr extension cable Art. Nr. SE9009
- Cool White (5000K) and Warm White(3000K)
- Dimensions: Width 75 x Depth 180 x Height 7 mm



PAD2 PRISMATIC SLS

LED Colour	Lumens	2 Light Kit	3 Light Kit	4 Light Kit	5 Light Kit	6 Light Kit
Warm White	301 lm	SE22006W2	SE22006W3	SE22006W4	SE22006W5	SE22006W6
Cool White	308 lm	SE22006C2	SE22006C3	SE22006C4	SE22006C5	SE22006C6

Note: Each light kit c/w driver, each lamp with 1.5 mtr cable



ALTI

- Extra bright with up to 319 lumens
- Silver finish with either cool or warm white LED
- Prismatic SLS Lighting; no diodes appear on light surface
- 35,000 hour lamp life
- Full range of switches and dimmers. See page 5.19 - 5.20
- Optional 2.5 mtr extension cable Art. Nr. SE9009
- Cool White (5000K) and Warm White(3000K)
- Dimensions: Width 110 x Depth 110 x Height 7 mm




ALTI PRISMATIC SLS

LED Colour	Lumens	2 Light Kit	3 Light Kit	4 Light Kit	5 Light Kit	6 Light Kit
Warm White	291 lm	SE21006W2	SE21006W3	SE21006W4	SE21006W5	SE21006W6
Cool White	391 lm	SE21006C2	SE21006C3	SE21006C4	SE21006C5	SE21006C6

Note: Each light kit c/w driver, each lamp with 1.5 mtr cable

QUADRA

- Aluminium finish with either cool or warm white LED.
- SLS Lighting; no diodes appear on light surface.
- 35,000 hour lamp life
- Lights can be Daisy chained together
- Full range of switches and dimmers. See page 5.19 - 5.20
- Optional 2.5 mtr extension cable Art. Nr. SE9009
- Optional version with Built in Sensor 
- Cool White (5600K) and Warm White(3000K)
- Dimensions: Width 40 x Depth 180 x Height 10 mm



SLS
surface light source



QUADRA SLS

LED Colour	Lumens	2 Light Kit	3 Light Kit	4 Light Kit	5 Light Kit	6 Light Kit
Warm White	93 lm	SE21092W2	SE21092W3	SE21092W4	SE21092W5	SE21092W6
Cool White	100 lm	SE21092C2	SE21092C3	SE21092C4	SE21092C5	SE21092C6

Note: Each light kit c/w driver, each lamp with 2.0 mtr cable

BERMUDA

- Stainless Steel finish with either cool or warm white LED
- SLS Lighting; no diodes appear on light surface
- 50,000 hour lamp life
- Full range of switches and dimmers. See page 5.19 - 5.20
- Optional 2.5 mtr extension cable Art. Nr. SE9009
- Cool White (5000K) and Warm White(3000K)
- Dimensions: Width 156 x Depth 142 x Height 25 mm



SLS
surface light source



BERMUDA SLS

LED Colour	Lumens	2 Light Kit	3 Light Kit	4 Light Kit	5 Light Kit	6 Light Kit
Warm White	93 lm	SE90010W2	SE90010W3	SE90010W4	SE 90010W5	SE90010W6
Cool White	100 lm	SE90010C2	SE90010C3	SE90010C4	SE90010C5	SE90010C6

Note: Each light kit c/w driver, each lamp with 2.5 mtr cable



PINTO

- Sleek, bright and discreet only 6 mm deep
- Silver finish with either cool or warm white LED
- 16 integrated diodes
- 30,000 hour lamp life
- Full range of switches and dimmers. See page 5.19 - 5.20
- Optional 2.5 mtr extension cable Art. Nr. SE9009
- Cool White (5000K) and Warm White(3000K)
- Low energy consumption with only 1.5W per fitting
- Dimensions: Diameter 60 x Height 6 mm



PINTO

LED Colour	Lumens	2 Light Kit	3 Light Kit	4 Light Kit	5 Light Kit	6 Light Kit
Warm White	112 lm	SE10138WWK2	SE10138WWK3	SE10138WWK4	SE10138WWK5	SE10138WWK6
Cool White	120 lm	SE10138CWK2	SE10138CWK3	SE10138CWK4	SE10138CWK5	SE10138CWK6

Note: Each light kit c/w driver, each lamp with 1.5 mtr cable

ORA

- Surface mounted
- Stainless Steel finish with either cool or warm white HD LED
- 72% brighter than original product
- 35,000 hour lamp life
- Full range of switches and dimmers. See page 5.19 - 5.20
- Optional 2.5 mtr extension cable Art. Nr. SE9009.
- Cool White (5000K) and Warm White(3000K)
- Dimensions: Width 66 x Depth 66 x Height 8.8 mm



ORA HD LED

LED Colour	Lumens	2 Light Kit	3 Light Kit	4 Light Kit	5 Light Kit	6 Light Kit
Warm White	128 lm	SE9007HDWW2	SE9007HDWW3	SE9007HDWW4	SE9007HDWW5	SE9007HDWW6
Cool White	135 lm	SE9007HDCW2	SE9007HDCW3	SE9007HDCW4	SE9007HDCW5	SE9007HDCW6

Note: Each light kit c/w driver, each lamp with 2.5 mtr cable

HYPE SLS

- Surface or recess mounted.
- Stainless Steel finish with either cool or warm white LED.
- SLS Lighting; no diodes appear on light surface.
- 50,000 hour lamp life
- Full range of switches and dimmers. See page 5.19 - 5.20
- Optional 2.5 mtr extension cable Art. Nr. SE9009.
- Cool White (5000K) and Warm White(3000K)
- Dimensions: Recessed = Ø65 x Depth 11 (Cut Out Ø57)
- Dimensions: Surface = Ø68 x Height 13.5



SLS
surface light source

**HYPE SLS**

LED Colour	Lumens	2 Light Kit	3 Light Kit	4 Light Kit	5 Light Kit	6 Light Kit
Warm White	93 lm	SE90050W2	SE90050W3	SE90050W4	SE90050W5	SE90050W6
Cool White	100 lm	SE90050C2	SE90050C3	SE90050C4	SE90050C5	SE90050C6

Note: Each light kit c/w driver, each lamp with 2.5 mtr cable

LARA SLS

- Surface or recess mounted.
- Extra bright with up to 216 lumens
- Aluminium finish with either cool or warm white LED.
- SLS Lightings no diodes appear on light surface.
- 35,000 hour lamp life
- Full range of switches and dimmers. See page 5.19 - 5.20
- Optional 2.5 mtr extension cable Art. Nr. SE9009.
- Cool White (5000K) and Warm White(3000K)
- Dimensions: Recessed = Ø65 x Depth 14 (Cut Out Ø59)
- Dimensions: Surface = Ø65 x Height 14.5



SLS
surface light source

**LARA SLS**

LED Colour	Lumens	2 Light Kit	3 Light Kit	4 Light Kit	5 Light Kit	6 Light Kit
Warm White	194 lm	SE10166W2	SE10166W3	SE10166W4	SE10166W5	SE10166W6
Cool White	216 lm	SE10166C2	SE10166C3	SE10166C4	SE10166C5	SE10166C6

Note: Each light kit c/w driver, each lamp with 1.5 mtr cable



VIVA

- 3M tape backing allows for quick and easy installation.
- Male/female ends allow you to create the length required
- 25,000 hour lamp life
- Cool White (5000K) and Warm White (2900K)
- Full range of switches and dimmers. See page 5.19 - 5.20
- The strip can be cut to length, reuse a cut section of the strip ONCE using the minicut connector (SE10318MCC).
- Range of interconnecting strips available See page 5.21
- Extremely low energy consumption, only 5W per 2000mm.
- Run a maximum length of 12m from one 30W driver.



VIVA FLEXI STRIP

LED Colour	2 mtr. Kit	4 mtr. Kit	6 mtr. Kit	8 mtr. Kit	10 mtr. Kit	12 mtr. Kit
Warm White	SE10615W2	SE10615W4	SE10615W6	SE10615W8	SE10615W10	SE10615W12
Cool White	SE10615C2	SE10615C4	SE10615C6	SE10615C8	SE10615C10	SE10615C12

Note: Each kit c/w driver and 2.5 mtr connection lead. Lumens per meter: 280 lm / 2.5 W per meter

COMPACT 2

- Extremely bright due to increased diode up to 1026 Lumens
- 3M tape backing allows for quick and easy installation
- Male/female ends allow you to create the length required
- 50,000 hour lamp life
- Full range of switches and dimmers. See page 5.19 - 5.20
- Cool White (5000K) and Warm White (2900K)
- The strip can be cut (every 50 mm) to length, reuse a cut section of the strip ONCE using the minicut connector (SE90317HD)
- Range of interconnecting strips available See page 5.21
- Run a maximum length of 8m from one 60W driver



COMPACT FLEXI STRIP

LED Colour	Lumens per 2mtr	2 Light Kit	3 Light Kit	4 Light Kit	6 Light Kit
Warm White	950 lm	SE10815W2	SE10815W3	SE10815W4	SE10815W6
Cool White	1026 lm	SE10815C2	SE10815C3	SE10815C4	SE10815C6

Note: Each kit c/w driver and 2.5 mtr connection lead. Lumens per meter: 633WW 667CW lm / 6 W per meter

PRIMO

- Cut and reconnect up to 50 times (every 100mm)
- 3M tape backing allows for quick and easy installation.
- Male/female ends allow you to create the length required
- 50,000 hour lamp life
- Cool White (5000K) and Warm White (3000K)
- Full range of switches and dimmers. See page 5.19 - 5.20
- Reuse a cut section using the minicut connector (SE10050).
- Range of interconnecting strips available See page 5.21
- Low energy consumption, only 3.6W per meter



PRIMO FLEXI REEL

LED Colour	Lumens per mtr	Wattage per mtr.	5 mtr Kit	5 mtr. reel *	Driver Connection Lead
Warm White	397 lm	3.6W	SE10755W1	SE10755W	SE10180 (Required)
Cool White	398 lm	3.6W	SE10755C1	SE10755C	

Note: Each kit c/w driver and 2.5 mtr connection lead. *Individual reels require separate Drivers (See page23)

DUOFLEX

- The DuoFlex colour can be set from warm white to cool white
- The strip can be cut to length every 100 mm, not for reuse
- Operate using a remote control, One remote will control all receivers within a 15m radius.
- Maximum length of 6m of the DuoFlex can be run from each receiver
- Ten brightness levels of the LED, dim or brighten by 10%.
- 3M tape backing allows for quick and easy installation
- Male/female ends allow you to create the length required
- 50,000 hour lamp life
- Colour range from Warm White (2700K) to Cool White (5000K)
- Range of interconnecting strips available See page 5.21



DUOFLEX

LED Colour	Length	Watts per mtr	Lumens per mtr	Art. Nr.	Driver lead	Remote Control	Receiver
Cool - Warm White	500 mm	5W	360 lm	SE10445D0	SE10325	SE1003000	SE1004100
	2000 mm			SE10425D0			

Note: Requires Driver (See Page 5.21) Available in a kit c/w remote, receiver, driver and driver leads SE10425D1

Flexi Strip Lights



RGB Flexi Strip

- 3M tape backing allows for quick and easy installation.
- 7 preset colours of the RGB (cool white, violet, yellow, cyan, green, red and blue)
- The perfect product to create mood lighting, either set to one of the 7 colours, or select the slow or rapid colour change option
- Male/female ends allow you to create the length required
- 50,000 hour lamp life
- The strip can be cut to length every 100 mm, not for reuse
- Range of interconnecting strips available See page 5.21
- Extremely low energy consumption, only 5W per mtr
- Run a maximum length of 10 mtr from one 60W driver
- Use the RGB remote control or Sensio Multi-Light app to create the effect or choose the colour that is perfect for you

RGB FLEXI STRIP

LED Colour	Length	Watts per mtr	Lumens per mtr	Art. Nr.	Driver lead	Remote Control	Receiver
Cool - Warm White	500 mm	5W	330 lm	SE10245R0	SE10325	SE791090	SE791050
	2000 mm			SE10225D0			

Note: Requires Driver (See Page 5.21) Available in a kit c/w remote, receiver, driver and connection leads SE10225D1

SIGMA

- S-Bend flexi strip the bends beyond 90° on horizontal surface
- 5 meter strip than can be cut every 100 mm
- Extremely bright due to increased diode up to 1026 Lumens
- 3M tape backing allows for quick and easy installation
- Male/female ends allow you to create the length required
- 50,000 hour lamp life
- Full range of switches and dimmers. See page 5.19 - 5.20
- Cool White (5000K) and Warm White (3000K)
- Run a maximum length of 13.75 m from one 60W driver




SIGMA S-BEND FLEXI REEL

LED Colour	Lumens per mtr	Wattage per mtr.	5 mtr Kit	5 mtr. reel *	Driver Connection Lead
Warm White	370 lm	3.6W	SE10255W1	SE10255W	SE10180 (Required)
Cool White	370 lm	3.6W	SE10255C1	SE10255C	

Note: Each kit c/w driver and 2.5 mtr connection lead. *Individual reels require separate Drivers (See page23)

QUANTUM DIFFUSED FLEXI LED

- Diffused LED Flexi Strip in 333 and 1,000 mm lengths
- The strip can be cut to length every 41 mm, not for reuse
- 3M tape backing allows for quick and easy installation.
- Male/female ends allow you to create the length required
- 35,000 hour lamp life
- Cool White (5000K) and Warm White (3000K)
- Full range of switches and dimmers. See page 5.19
- Range of interconnecting strips available See page 5.21
- Energy consumption of only 9W per meter

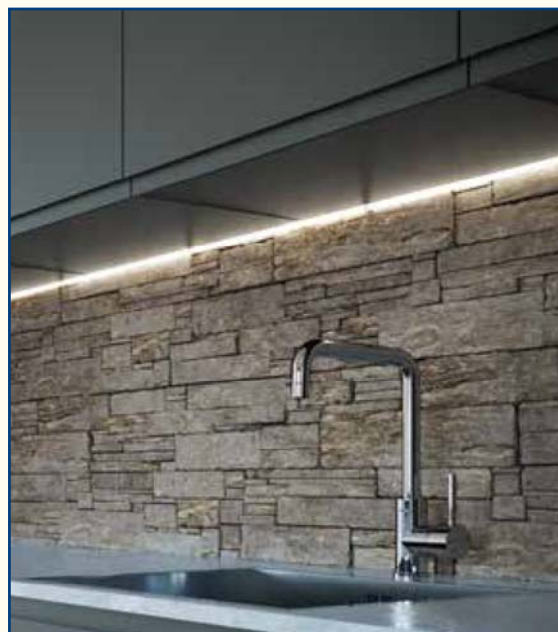

QUANTUM DIFFUSED FLEXI STRIP

LED Colour	Lumens per mtr	Watts per mtr	333 mm	1000 mm	Driver Connection Lead
Warm White	558 lm	9W	SE20105W0	SE20115W0	SE200570 (Required)
Cool White	600 lm		SE20105C0	SE20115C0	

Note: Individual reels require separate Drivers (See page 5.21)

ALUMINIUM PROFILES FOR FLEXI STRIPS

- 3 solutions: Recessed, surface mounted flat or angled
- Perfect for use under cabinets, inside larders or inside wardrobes
- Includes end caps and mounting brackets
- For use with Viva, Compact, Premio, Duoflex and RGB flexi strips
- Extremely slim profile to create the ultimate discreet lighting solution
- Aluminium profile with a frosted cover.
- Butt lengths together for longer runs
- For detailed dimensions please see page



ALUMINIUM PROFILES

Application	Name	Length	Cut Out	Width x Height	Art. No.
Recessed	Linia	2200 mm	D 6.5 x W 18 mm (19 with bracket)	W21 x H8 mm	SE980220
Surface	Fino	2000 mm	-	W18 x H8.5 mm	SE981220
Surface Angled	Beam	2200 mm	-	W16 x H16 mm	SE982220

Plinth Lights



PURO

- Available in Kits up to 9 fittings and 1 x 6W driver
- Individual fittings also available
- The perfect invisible dot plinth lighting solution.
- 15mm fittings – very discreet.
- The fittings daisy chain together for simple installation.
- 2 x 1m cables per fitting.
- Compatible with Sensio switches and dimmers
- The driver in the packs (SE40553) has a maximum allowance of 6W
- A maximum of 25 fittings can be run from the one driver (based on the fittings being daisy chained)
- 0.24Watts per fitting
- Cut Out size Ø 11.8 mm



PURO PLINTH LIGHT

LED Colour	Lumens	Kit 3	Kit 4	Kit 5	Kit 6	Kit 7	Kit 8	Kit 9
Warm White	10 lm	SE15094W3	SE15094W4	SE15094W5	SE15094W6	SE15094W7	SE15094W8	SE15094W9
Cool White	10 lm	SE15094C3	SE15094C4	SE15094C4	SE15094C6	SE15094C7	SE15094C8	SE15094C9

Note: Additional lights can be added to Kits up to max of 25 Art No SE15094C0 (Cool White) SE15094W0 (Warm White)

SPECTO

- Available in Kits up to 9 fittings and 1 x 6W driver
- Individual fittings also available up to maximum of 18 lights
- IP44 rated (protected against water splashes).The perfect invisible dot plinth lighting solution.
- 15mm fittings – very discreet.
- The fittings daisy chain together for simple installation.
- 2 x 1m cables per fitting.
- Compatible with Sensio switches and dimmers
- The driver in the packs (SE40553) has a maximum allowance of 6W
- A maximum of 18 fittings can be run from the one driver (based on the fittings being daisy chained)
- 0.32Watts per fitting
- Cut Out size Ø 10 mm



SPECTO PLINTH LIGHT

LED Colour	Lumens	Kit 3	Kit 4	Kit 5	Kit 6	Kit 7	Kit 8	Kit 9
Warm White	8 lm	SE15091W3	SE15091W4	SE15091W5	SE15091W6	SE15091W7	SE15091W8	SE15091W9
Cool White	8 lm	SE15091C3	SE15091C4	SE15091C4	SE15091C6	SE15091C7	SE15091C8	SE15091C9

Note: Additional lights can be added to Kits up to max of 18 Art No SE15091C0 (Cool White) SE15091W0 (Warm White)

LUCE SLS

- Available in Kits up to 9 fittings and 1 x 6W driver
- Individual fittings also available up to maximum of 10 lights
- Stainless Steel Surround
- SLS finish with cover on diodes
- 15mm fittings – very discreet.
- The fittings daisy chain together for simple installation.
- Compatible with Sensio switches and dimmers
- The driver in the packs (SE40553) has a maximum allowance of 6W
- A maximum of 10 fittings can be run from the one driver (based on the fittings being daisy chained)
- 0.6 Watts per fitting
- Dimension 50 x 50 mm
- Cut Out size Ø 44 mm



LUCE SLS PLINTH LIGHT

LED Colour	Lumens	Kit 3	Kit 4	Kit 5	Kit 6	Kit 7	Kit 8	Kit 9
Warm White	16 lm	SE15094W3	SE15094W4	SE15094W5	SE15094W6	SE15094W7	SE15094W8	SE15094W9
Cool White	16 lm	SE15094C3	SE15094C4	SE15094C4	SE15094C6	SE15094C7	SE15094C8	SE15094C9

Note: Additional lights can be added to Kits up to max of 10 Art No SE15094C0 (Cool White) SE15094W0 (Warm White)

NIMBUS

- IP67 rated fittings suitable for use on kitchens plinths or in bathrooms
- All components are included in the pack (6 fittings and LED driver)
- 1 metre of cable on each individual fitting
- 1.5 metres of mains cable from the driver (includes 13A plug).
- Quality stainless steel fitting.
- The maximum walkover pressure is 100kg.
- Suitable for use in ceramic tiles, natural stone, hard wood or Quartz flooring.
- Cool white LED, an ideal plinth lighting option
- Low energy consumption, each fitting runs at only 0.3W.
- Cut Out size Ø 24 mm
- The maximum wattage load of the driver in this pack is 8W.



NIMBUS IP67 PLINTH LIGHT

LED Colour	Lumens	Pack Contents	Art. No.
Cool White	22.8 lm	6 lights including 8W driver	SE35000C6

Under Cabinet Strip Lights



ARROW

- Continuous diffused LED under cabinet lighting
- Slim profile of only 13mm this fitting is extremely discreet
- Available in both cool or warm white LED
- 50,000 hour lamp life
- Full range of switches and dimmers. See page 5.19 - 5.20
- Cool White (5000K) and Warm White(3000K)
- Additional kits available; maximum length 3600mm



ARROW SLS LED STRIP LIGHT

LED Colour	300mm	570mm	870mm	1140mm	1440mm
Warm White	SE9075HDWWK01	SE9075HDWWK02	SE9075HDWWK03	SE9075HDWWK04	SE9075HDWWK05
Cool White	SE9075HDCWK01	SE9075HDCWK02	SE9075HDCWK03	SE9075HDCWK04	SE9075HDCWK05

Note: Each light kit c/w driver and 1.5 mtr Arrow starter cable

CONNEX

- Continuous diffused LED under cabinet lighting
- Mains fitting for ultra simple installation
- Aluminium finish available in warm white LED
- 25,000 hour lamp life
- These fittings can be directly interlinked to form a continuous run of light
- Each fitting is supplied with 1m of mains cable for simple installation (no driver required)




CONNEX SLS LED STRIP LIGHT

	270mm	396mm	524mm	623mm
Art No	SE10173W0	SE10183W0	SE10193W0	SE10203W0
Lumens	450 lm	540 lm	720 lm	900 lm

Note: Each light fitting is supplied with 1 mtr of mains cable

QUADRA

- Aluminium finish with either cool or warm white LED
- SLS Lighting; no diodes appear on light surface
- 35,000 hour lamp life
- Lights can be Daisy chained together
- Full range of switches and dimmers. See page 5.19 - 5.20
- Optional 2.5 mtr extension cable Art. Nr. SE9009
- Optional version with Built in Sensor 
- Cool White (5600K) and Warm White(3000K)
- Dimensions: Width 40 x Depth 180 x Height 10 mm



QUADRA SLS

LED Colour	Lumens	2 Light Kit	3 Light Kit	4 Light Kit	5 Light Kit	6 Light Kit
Warm White	93 lm	SE21092W2	SE21092W3	SE21092W4	SE21092W5	SE21092W6
Cool White	100 lm	SE21092C2	SE21092C3	SE21092C4	SE21092C5	SE21092C6

Note: SE240920 - Mounting Bracket is required to transform the SLS Quadra into an over cabinet light

ASTA

- Fitting has an adjustable head for optimum illumination of the cabinet front (adjusts by 30°)
- Aluminium finish with either cool or warm white HD LED
- 20,000 hour lamp life
- Can also be used above wardrobes
- Full range of switches and dimmers. See page 5.19 - 5.20
- Optional 2.5 mtr extension cable Art. Nr. SE9009
- Cool White (5000K) and Warm White(3000K)
- Dimensions: Width 340 x Depth 240 x Height 46 mm



ASTA HD LED

LED Colour	Lumens	1 Light Kit	2 Light Kit	3 Light Kit
Warm White	71 lm	SE9015HDWW.1	SE9015HDWWK2.1	SE9015HDWWK3.1
Cool White	77 lm	SE9015HDCW.1	SE9015HDCWK2.1	SE9015HDCWK3.1

Note: Each light kit c/w driver, each lamp with 1.5 mtr cable



VERSO

- Various lengths available to suit standard drawer carcasses.
- Cool white high definition LED to provide optimum light output.
- IR sensor integrated on the front edge of the fitting, as soon as the drawer
- is opened the light will illuminate. Once the drawer is closed the fitting will switch off immediately to ensure no energy wastage.
- The ideal solution to illuminate pan drawers.
- Low wattage, meaning a full drawer stack can be illuminated using only one LED driver.
- Brackets and cable tidy supplied.
- This fitting is suitable for use in both the kitchen and the bedroom.



VERSO LED DRAWER LIGHT

LED	462MM	562MM	762MM	862MM	962MM	1162MM
Cool White	SE7300HDCW	SE7305HDCW	SE7310HDCW	SE7315HDCW	SE7320HDCW	SE7325HDCW
Lumens/Watts	205 lm/2.6w	250 lm/3.3w	340 lm/4.5w	380 lm/5.4w	430 lm/6w	515 lm/7.3w

Note: Calculate the total Wattage of all drawers in a unit and choose from 6, 15 or 30 Watt 12V (Orange) Driver Page 28

DURA

- Supplied with a magnetic strip with 3M adhesive backing, simply apply this to the drawer and the fitting contains a magnetic strip. Install in under a minute!
- Aluminium body
- Dual mode (in drawer/in cabinet or under cabinet swipe function)
- Simple function change by switch on side of fitting
- 120 degree beam angle (illuminates the whole drawer)
- Integrated IR sensor with a 300 second delay if no movement is detected
- Requires 4 x AAA batteries to run
- 30,000 hour lifespan
- Cool white LED (5000K)
- 300mm x 17mm x 18mm




DURA

Wattage	Lumens	CODE
0.8W	47 lm	SE16096C0

ALTO

- Aluminium wardrobe rail light with anti-slip design.
- Features an integrated PIR sensor which automatically switches the light on when the wardrobe door is opened.
- The PIR will remain on for 30 seconds and then automatically switch off if no movement is detected to ensure there is no power wastage.
- > The rail is available in 4 lengths, most of which can be cut down if required. (The cut lengths stated below are the maximum lengths which can be cut from the left side of the unit)
- No electrical installation required. Contains a Lithium-ion rechargeable battery.
- The run time of the product is 6.5 months based on 2.5 minutes of use per day., The charging time is 5.5 hours on average.
- The LED's in this fitting have a lifespan of 30,000 hours.
- The maximum weight load of the rail is 20kg.

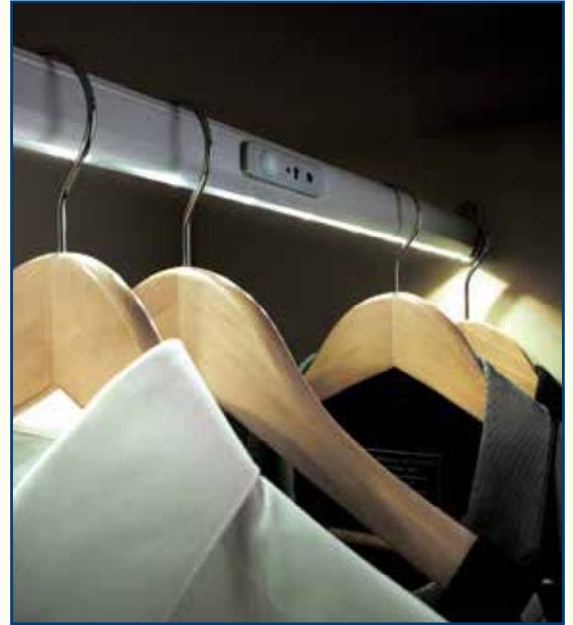


ALTO				
LED Colour	562mm	762mm	962mm	1162mm
Cool White	SE53002CO	SE53102CO	SE53202CO	SE53302CO
Lumens/ Watts	55 lm/0.6w	75 lm/.08w	95 lm/1w	115 lm/1.2w

Note: Recharge the unit using the 03.2005.0800 pluggable USB charger

SOLUS

- Angled surface aluminium Light
- Ideal for retro-fitting. Contains rechargeable battery via USB charger
- No electrical installation.
- 30,000 hour lamp life
- Integrated PIR sensor which automatically switches the light on/off
- Cool White (4500K)
- Recharge with Pluggable USB Cable Art. No. SE2007000
- Dimensions: Width 80mm x Height 35mm

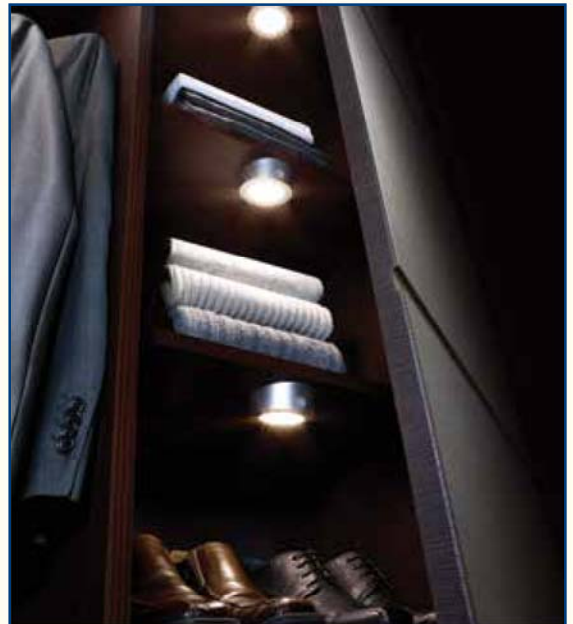

SOLUS		
LED Colour	LUMENS	CODE
Cool White	52 lm	SE20061CO



2 x USB



IP54 Rated

SENSIOPOD

- Two USB ports integrated to charge the latest USB devices.
- Slim profile design with aluminium casing
- This product has a specially designed chrome handle which makes it simple to pull the fitting up.
- IP54 rated with inbuilt water channels, protected against splashing water
- Quick release catch to guarantee the unit will close securely
- Neon green control switch provides a simple means of checking appliances have been turned off when in use to save energy bills
- Visible plugs and unsightly cables will no longer be seen as the SensioPod can be retractable fully whilst products are still plugged in
- No need to access the fuse under the plinth should it need changing as the fuse is built into the model below the on/off switch



Aluminium

SensioPod

Detail	Art. No.
IP54 Rated SensioPod Aluminium 2 x USB, 3 X Power c/w 2.5 mtr lead & 13 amp plug	SE80050AL



SENSIOPOD+

- Die cast metal top in a choice of three finishes, Chrome, Black Nickel and Stainless Steel.
- Two USB ports integrated to charge the latest USB devices.
- Slim profile design with aluminium casing.
- Chrome handle which makes it simple to pull the fitting up.
- IP54 rated so can be fitted around sinks.
- Quick release catch ensures unit will always close securely.
- Neon green control switch provides a simple means of checking appliances are turned off when not in use - save on energy bills.
- Visible plugs and cables will no longer be seen as the SensioPod can be retracted fully whilst products are still plugged in.
- Easy access to the fuses should it need changing, as the fuse is built into the model below the on/off switch.
- 90 - 92 mm diameter Cut Out



Stainless Steel



Black Nickel



Chrome

SensioPod+

Stainless Steel	Chrome	Black Nickel
SE80050SS	SE80050CH	SE80050GM

SENSIO POWER U

- Add a touch of luxury to your kitchen with this exclusive product.
- Multi-functional; power, Bluetooth audio, hanging rail and USB.
- Mount under kitchen wall units.
- Place your Tablet or cookbook on the aluminium shelf when cooking
- Two power sockets and Bluetooth audio; plug your appliances in and wirelessly play your music whilst cooking or entertaining through a single device.
- Two USB ports (with a combined max. allowance of 2100mA)
- Aluminium finish of the power unit and hanging rail
- IP54 rated so the product is not affected by splashing water or steam
- Neon green switch provides a simple means of checking appliances have been turned off when not in use to save on energy bills

Audio specifications:

- 2W miniature audio speaker
- Sensitivity at L/R380MV
- SNR > 80db
- Frequency range: 280Hz-16KHz
- Suitable for use with any Bluetooth enabled audio device and 3.5mm headphone jack (including MP3, MP4, Android Smart phones, iPhone's and iPad).



SENSIO POWER U

Body Dimensions	Shelf Dimensions	Art. No.
344 W x 75 D x 76 H	200 W x 110 D x 200 H	SE891920

SENSIOPOD BLUETOOTH

- The first SensioPod pull up socket with an in-built Bluetooth speaker
- Multi-functional product; power, Bluetooth audio and USB.
- Two USB ports (with a combined max. allowance of 2100mA)
- Aluminium casing, slim profile and steel finish top
- Specially designed handle makes it simple to pull the fitting up.
- IP54 rated with inbuilt water channels, protected against splashing water
- Quick release catch to guarantee the unit will always close securely
- Neon green switch provides a simple means of checking appliances have been turned off when not in use to save on energy bills.
- Visible plugs and unsightly cables will no longer be seen as the SensioPod can be retracted fully whilst products are still plugged in

Audio specifications:

- 2W miniature audio speaker
- Sensitivity at L/R380MV
- SNR > 80db
- Frequency range: 280Hz-16KHz
- Suitable for use with any Bluetooth enabled audio device and 3.5mm headphone jack (including MP3, MP4, Android Smart phones, iPhone's and iPad).



SENSIOPOD BLUETOOTH

Dimensions	Cut Out	Art. Nr.
Ø 100 x 365 H (When opened)	Ø 90 - 92 mm	SE890920



SENSIO POWER R

- The perfect discreet single socket power solution, perfect if you have minimal void space available below the worktop.
- Two USB ports for mobile phone & iPod charging.
- Stainless steel finish top for a high quality finish.
- Alternatively use this product in the side panel of an island.
- Neat finish. The lip of the product which sits on top of the work surface is only 5mm.
- The depth of the steel lid itself is only 1mm.
- The hinged lid is magnetised and simply lifts up. The lid will remain upright until closed if mounted in a worktop.
- Illuminated red power icon provides a simple means of indicating whether there is power being supplied to the product.
- Suitable for use in kitchens, bedrooms or home office.



SENSIO POWER R

	Stainless Steel
Art. No.	SE90900

Qi WIRELESS CHARGER

- Integrate into the work surface for wireless charging solution
- Simply sit any Qi enabled mobile device on top of the charger
- Removes the need for power cords.
- Charging distance 0-6mm.
- Two finishes available; black and white. The white finish option has a silver finish around the edge of the fitting.
- The charger must be fitted with a 25mm clearance from the edge of the work surface. The maximum worktop depth item is suitable for is 60mm. 80mm Ø Cut Out
- The lip is only 1mm deep for a completely flush fit.
- Input: DC 5V - 1.5A. Output: DC 5V - 1A.



Qi WIRELESS CHARGER

	Black	White
Art. No.	SE870980	SE870990

LED DIMMING REMOTE CONTROL

- Create or choose the lighting level that is perfect for you at the touch of a button.
- Multiple functions of the dimmer:
 - - Dim to the lowest light level - press the left hand button once.
 - - Set to full brightness - press the right hand button once.
 - - Select the desired light level by turning the dial.
 - - On/off switching - press the middle button.
- Memory function of the performance before last switched off.
- There is no limit on the number of receivers which can be controlled via one remote control. All receivers within a 15m range of the remote can be controlled via a single remote.
- One receiver is required for each driver (connected to the lights you wish to control).
- Suitable for single colour LED lighting only.
- Maximum Wattage with reciever 60W (24V) / 30W (12V)



DIMMING REMOTE CONTROL

	Receiver	Remote Control
Art. No.	SE790050	SE793090

SENSIO MULTI LIGHT APP

- Control any Sensio lighting product which requires a 12/24V Sensio driver from an Apple mobile device.
- How it works: - Simply plug the relevant type of receiver for your lighting (single colour, RGB or Duo Colour) into your drivers. A receiver is required for each driver which is connected to lighting you'd like to control from the App.
- - Download 'Sensio Multi Light' from the Apple App store (free to download).
- - Switch all lighting to be controlled via the App on.
- - Follow the instructions to simply configure your preferred settings
- Features:
 - - On/off switching of connected lights
 - - Single product selection - choose to control each type/area of lighting individually
 - - Group lighting - group all/some of your lighting to be controlled together
- Your settings - set-up lighting area's and control each area separately
- Music - colour changing lighting will change to the sound of your music



BLUETOOTH RECEIVERS FOR MULTI LIGHT APP

	Black	White
Art. No.	SE870980	SE870990



MODA -LED DIMMING SENSOR SWITCH

- Multi-functional product
- The SE40520 has 3 functions; use as a dimmer, external on/off switch or in-cabinet on/off switch for 12V & 24V LED products
- Attractive product, perfect for contemporary kitchens.
- Use with any 12V or 24V SENSIO product (without an integrated sensor)
- Aluminium effect finish to match many of our best selling products
- Plug and play, and no additional wiring is required by the electrician
- IR Sensor with a 5cm detection range (swipe on/off function)
- Memory function of the last setting before the lighting was switched off
- 1.5m cable from the sensor to the JB4 plug and 1.5m from the sensor to the 6 port JB4 distribution block



MODA -LED DIMMING SENSOR SWITCH

CODE	WATTAGE	DETECTION RANGE
SE40520C	15 or 30W	5cm

CANNON Cabinet/Swipe Sensor Switch

- Can be used with all lighting (without an integrated sensor).
- Works as an on/off switch for these fittings.
- Three functions of the sensor:
 - Mount inside a cabinet – open door to activate light
 - Mount under cabinet – lights are activated when a hand passes before the sensor
 - Mount under cabinet - Cover sensor to dim lights up/down
- 5cm detection range, so unwanted detection is not a problem
- Can be surface mounted or recessed into a panel.
- Plug and play, and no additional wiring is required by the electrician
- 1 x JB4 Distribution Block supplied with each sensor
- Ø 10.8 for drill in option





CANNON Cabinet/ Swipe Sensor Switch

Code	Wattage	Detection Range
SE40516.1	24W OR 48W	5CM

Drivers

- With the exception of VERSO (page XX) All lighting products in the Sensio range run on 24 Volt systems
- All drivers and lights from Sensio are colour coded to ensure the correct light is used with the correct driver
- Each driver can run a number of lights. Simply divide the wattage of the driver by the wattage of a single light and this will tell you exactly how many lights can be run by the driver
- Sensio drivers are available in a number of wattages. Refer to table below



DRIVERS				
Code	Voltage	Wattage	Nr of JB4 Connection Ports	Dimensions
SE40625	12 V 	6 Watt	4	58x34x20mm
SE40525		15 Watt	6	120x45x20mm
SE40526		30 Watt	12	150x40x31mm
SE40553	24V 	6 Watt	4	52x34x20mm
SE40555		15 Watt	6	120x45x20mm
SE40556		30 Watt	12	155x42x32mm
SE40557.1		60 Watt	12	185x60x31mm

Accessories for Flexi Strip

Flexi Strip Leads					
Wattage	Compact	Viva	Primo/Sigma	RGB/DuoFlex	Quantum
Inter Connecting Lead - 500mm	SE90315HD			SE10328	
Inter Connecting Lead - 1500mm		SE10317	SE100750		SE200750
Corner Connection Lead 50mm	SE90316HD	SE10316	SE101050	SE10327	SE200050
LED/RGB Flexible Strip Cut Connector	SE90317HD	SE10318MCC			
End Cap/Interconnecting Clip			SE100050		