





Established in 1993, OPK Smart Home Technology Co, Ltd. has several manufacturing locations with over 1,200 employees and more than 50,000 sqm of operating space. The technology-oriented company has a comprehensive portfolio of sliding door fittings for all applications in the furniture fittings and architectural hardware sectors for wood, glass and aluminium frame solutions.

Excellent soft closing and running properties are the hallmark of the brands' products and therefore are unique. OPK have created a great reputation for its excellent products and continuous development. OPK were honoured to receive the 'High and New Technology Enterprise & Vision Furniture First Rate Quality' awards making them the market leader in the development of sliding door systems.

This development by OPK is based on professionalism, innovation, and quality. OPK develops, manufactures, and distributes the OPK Brand product range as well as a very large and customer-specific OEM range.

OPK Europe, based in Germany was the first branch outside of Asia. They celebrated the opening of the Horb am Neckar location in June 2018. Due to the rapid growth of brand popularity and sales, OPK has become one of the largest manufacturers of sliding door systems worldwide.



OPK Ocean Sliding Door system

- For sliding wooden doors
- Soft opening and closing dampening
- 80 kg capacity



OPK Rotary Pocket Door system

- Single leaf pocket door system
- Soft opening and closing dampening
- Up to 35kg weight capacity



OPK Sailing 4 Bi-Fold Door system

- Bi-Folding solution for wooden doors
- Two options with height up to 2450 mm
- Up to 25 mm thick fronts



OPK Sailing 2 Bi-Fold Door system

- Bi-Folding solution for wooden doors
- 300 / 400 wide doors with height ≤ 2400 mm
- Up to 20 mm thick fronts



OPK Spaceship 80 Minimal Pocket Door system

- For 35 - 45 mm thick wooden doors
- Soft opening and closing dampening
- Door widths up to 1200 mm
- 80 kg weight capacity



Further OPK systems

- Non stock items
- Min orders and lead times apply








Ocean Sliding System

- Sliding system for wooden doors
- 80 kg weight capacity
- Door widths 530 - 1500 mm
- Door thickness 18 - 40 mm
- Door height ≤2800 mm
- Soft closing and opening on all doors
- Height adjustable ± 6 - 8 mm
- Kits for two doors and three doors
- Optional door handle / stabilisation profile for 18 mm doors


OPK Ocean 1 Sliding System

	Two Door Kit	Three Door Kit
Art. No.	OOCE2KIT	OOCE3KIT
Contents	1 pair Running System Outer Door 1 pair Guiding System Outer Door 1 pair Running System Inner Door 1 pair Guiding System Inner Door 4 pcs Soft Close Dampener 36 pcs self drilling screws 1 pc 4mm Hex Allen key	1 pair Running System Outer Door 1 pair Guiding System Outer Door 2 pair Running System Inner Door 2 pair Guiding System InnerDoor 6 pcs Soft Close Dampener 1 Central position Dampener 54 pcs self drilling screws 1 pc 4mm Hex Allen key

OPK Ocean 1 Accessories


Description		Art. Nr.	Finish	Dimensions
Top Running Track		OOCE25RT	Silver	2500 mm
Base Guiding Track		OOCE25GT	Silver	2500 mm
Straight Handle		OOCE25HB	Brushed Black	2500 mm
		OOCE25HS	Brushed Silver	2500 mm
Stabilisation Handle		OOCE25SHB	Brushed Black	2500 mm
		OOCE25SHS	Brushed Silver	2500 mm
Door Follower		OOCEDF	Titan/Black	60 x 20 x 25 mm

Installation Requirements

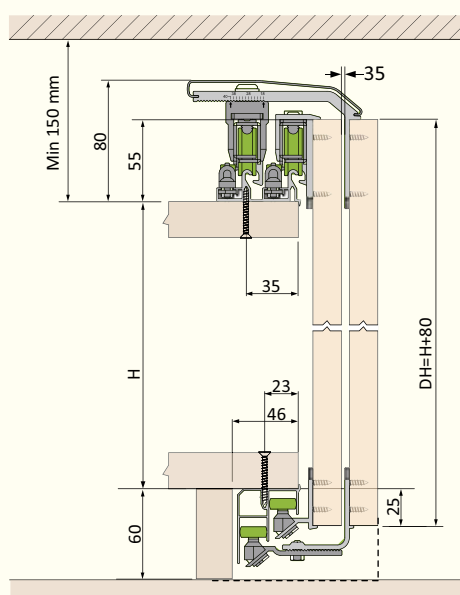

DH = Door Height
H = Cabinet Height

Installation Positions

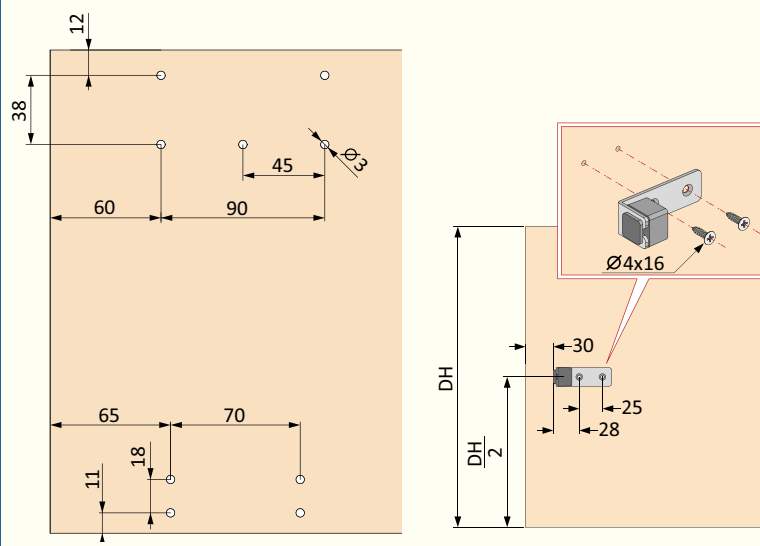

DH = Door Height




Rotary Pocket Door System

- Pocket system for single leaf wooden doors
- 15-35 kg weight capacity
- Door widths 420 - 600 mm
- Door thickness 18 - 25 mm
- Door heights 1800 - 2850 mm
- Soft closing and opening on all doors
- Height adjustable ± 3 mm
- Kits for left hand or right hand doors

OPK Rotary Pocket Door System

	Left Opening Door Kit	Right Opening Door Kit
Art. No.	OROTSETL	OROTSETR

Technical Drawings

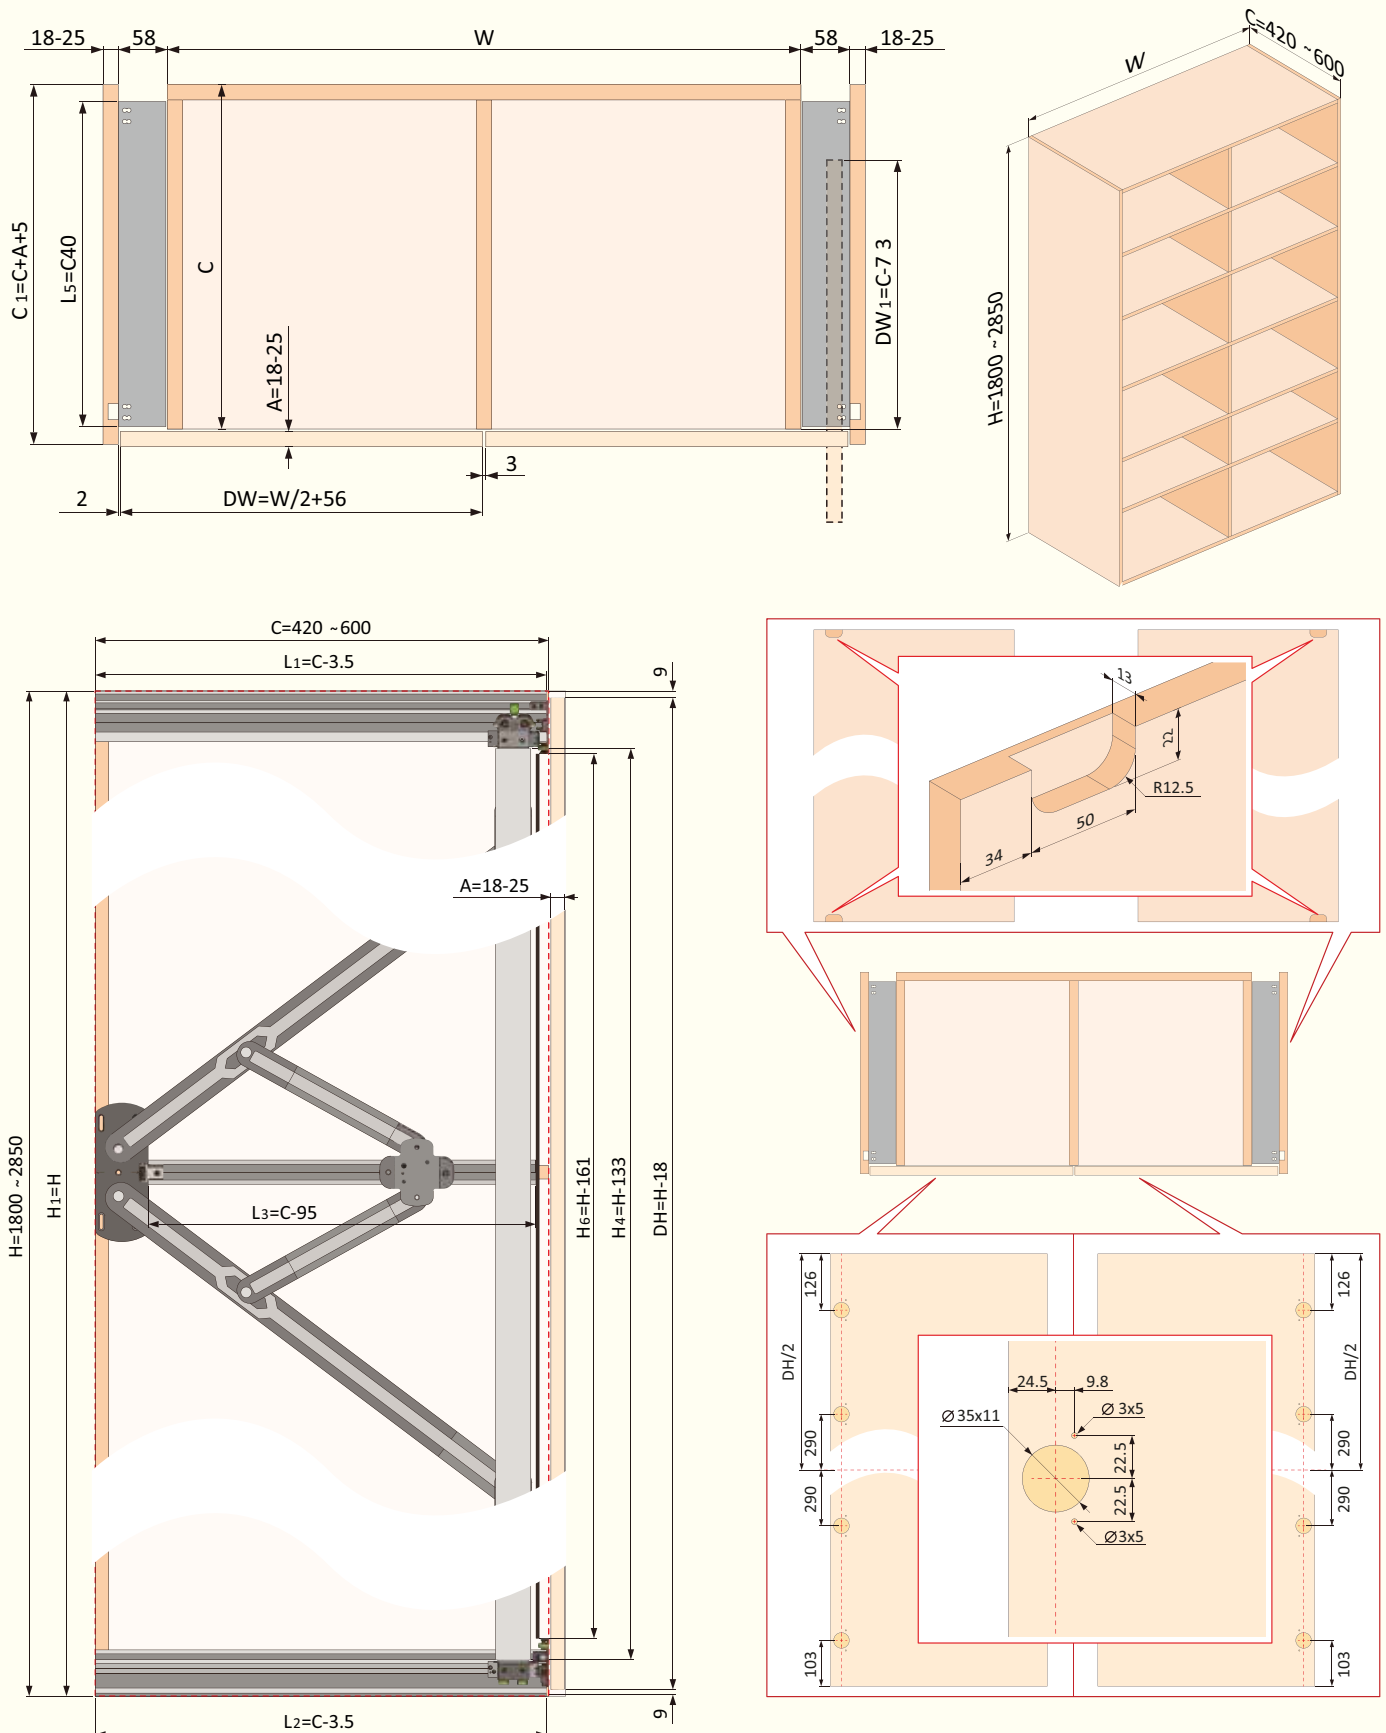





Sailing 4 Bi-folding Door System

- Bi-Fold system wooden doors
- Two solutions with 15 or 30 kg weight capacity
- Door widths 250 - 500 mm
- Door thickness 18 - 25 mm
- Door heights ≤ 1500 (15kg) or ≤ 2450 (30kg)
- Soft closing and opening on all doors
- Height adjustable ± 3 mm
- Upper sliding track for all solutions
- Lower Guide track only used for door height ≥ 1500 mm
- Kits include Centre Drilling Template


Sailing 4 Bi-Fold Door System

	Door ≤ 1500 mm	Door ≤ 2450 mm
Art. No.	OSAI415	OSAI430
Max Weight	15 kg	30 kg
Centre Hinges	2	3
Upper Track required	Yes	Yes
Lower Track required	No	Yes


OPK Sailing 4 Bi-Fold Door Accessories

Description		Art. Nr.	Finish	Dimensions
Upper Running Track		OSAI4UT1B	Anadised Black	1000 mm
Lower Guide Track		OSAI4GT1B	Anadised Black	1000 mm


Door Height ≤1500 mm

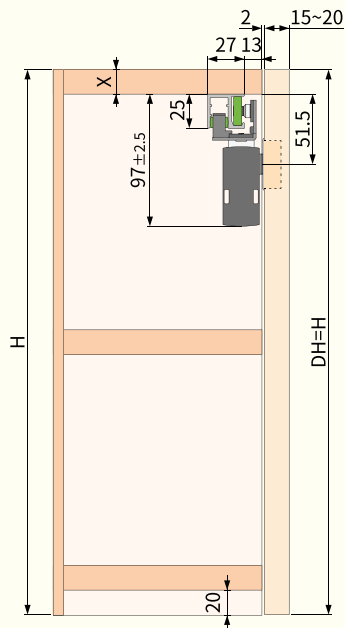


Door Height ≤2450 mm

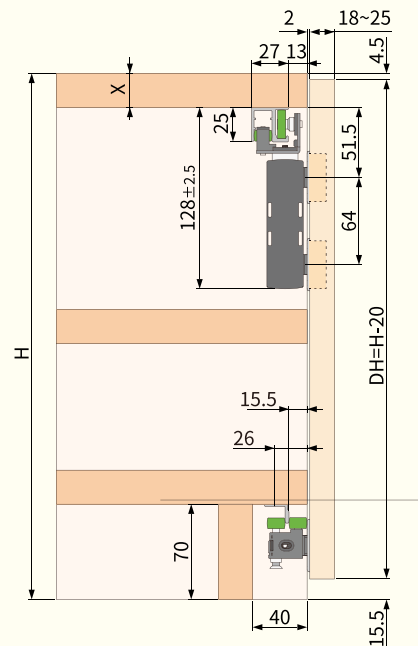

Door Widths

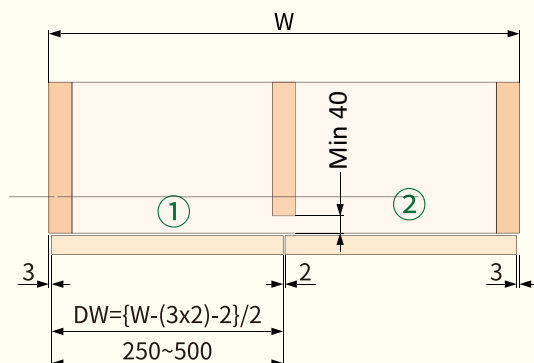

Minimum Gap

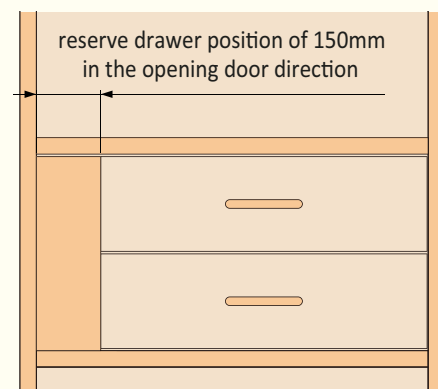




Sailing 2 Bi-folding Door System

- Bi-Fold system wooden doors
- Simple Pivot Arm for Bi-folding
- Door widths 300 - 400 mm
- Door thickness 18 - 20 mm
- Door heights ≤ 2400
- Soft closing achieved by hinges
- Height adjustable ± 3 mm
- Weight capacity dictated by hinges
- Kits include Centre Drilling Template


Sailing 2 Bif-Fold Door System

	Door ≤ 2450 mm
Art. No.	OSAI2
Max Weight	Dictated by hinges
Centre Hinges	4


Outer Top Mounting

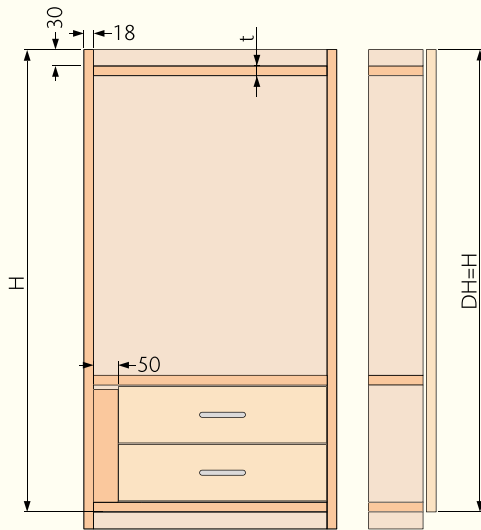


Inner Top Mounting

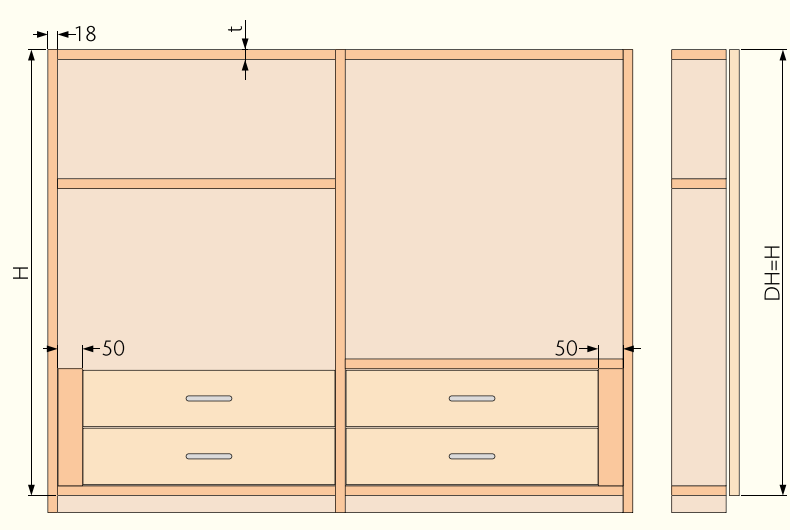


Two Doors

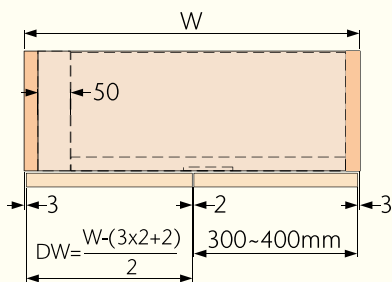


Four Doors

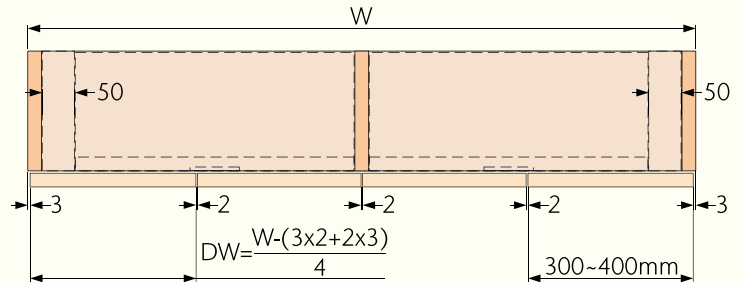

Pivot Arm fixing positions

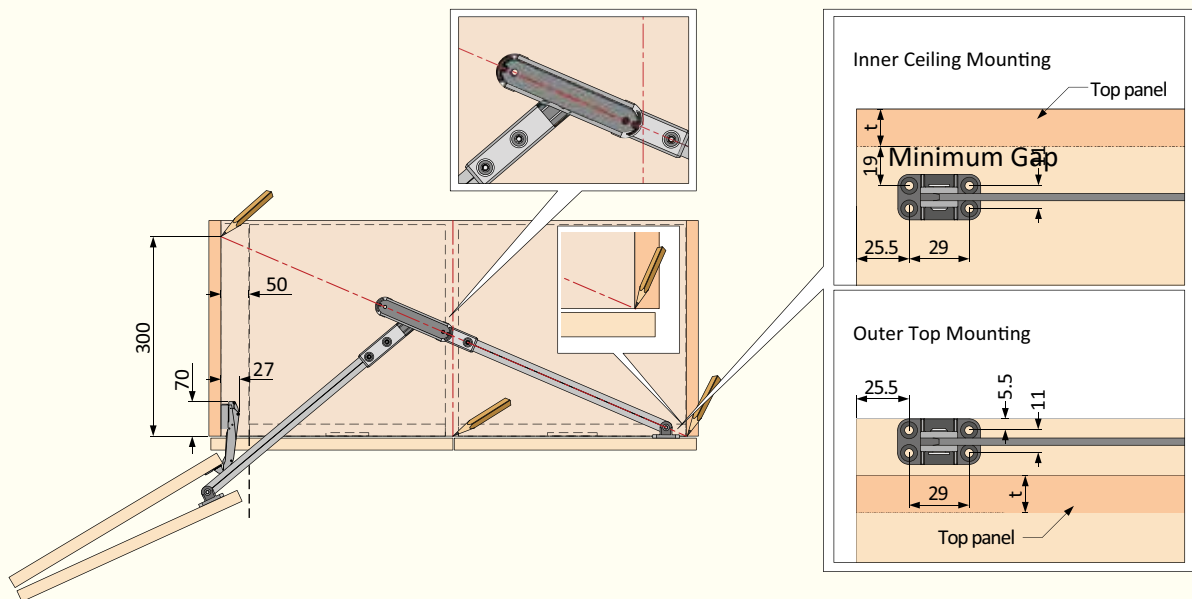

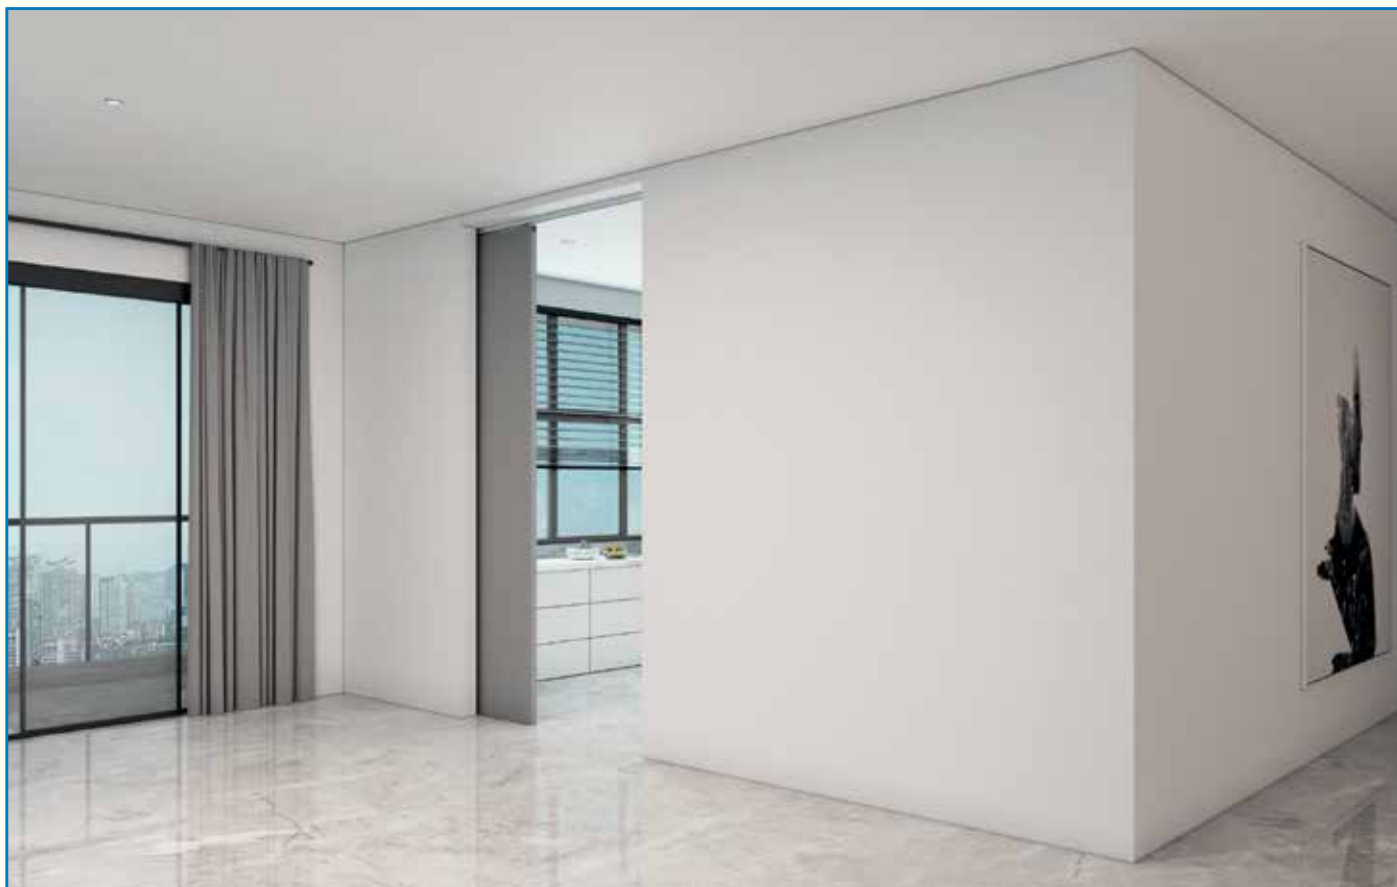

Spaceship 80 Minimal Pocket System


- Weight capacity of 80 kg
- Soft closing and opening
- Door widths ≥ 580 mm
- Door thickness 35 - 45 mm
- Height adjustable ± 3 mm
- 2500 mm track
- Easy Assembly and adjustment



Spaceship 80 Minimal Pocket


	Sliding Pocket Door
Art. No.	OSPA80WMK25
Max Weight	80 kg
Door widths	≥ 580 mm
Track Length	2500 mm
Door Thickness	35 - 45 mm

Pocket and Door Dimensions


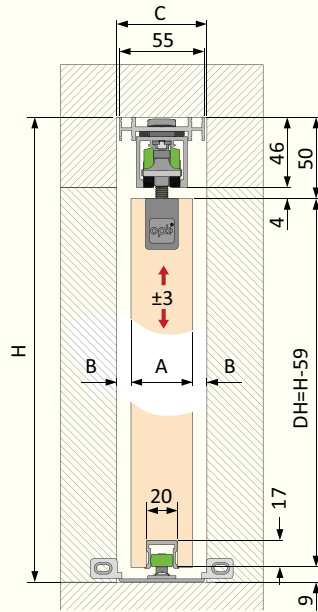


A	35	40	45
B	10	7.5	7.5
C	55	55	60


Track Dimensions

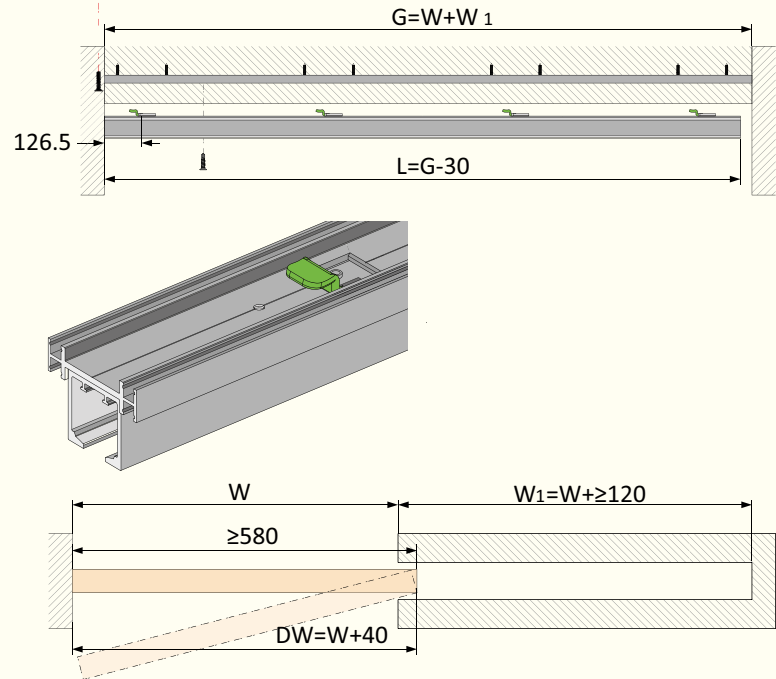

Door Processing

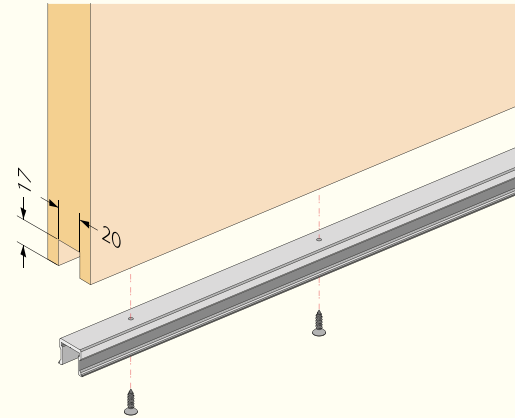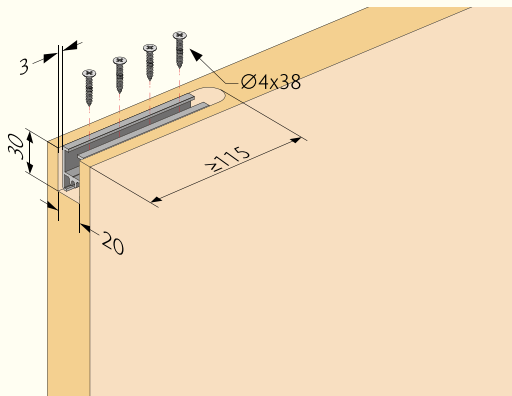

Fixing Positions

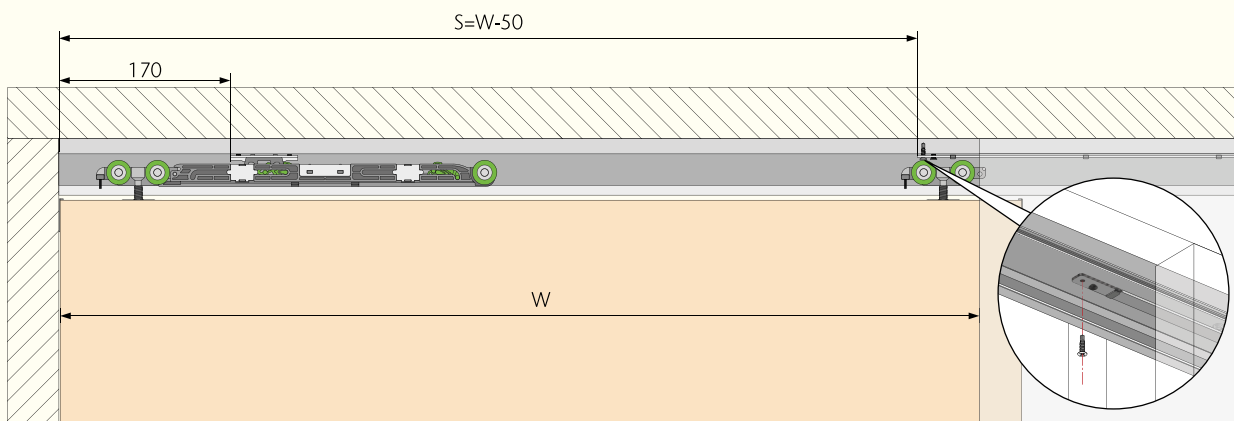

Further Products



OPK Speedboat

- 16 - 19 mm doors with max 1400H x 1000W
- Soft opening and closing dampening
- 20 kg door weights
- Glass option for 4 - 6 mm



OPK Submarine

- 16 - 19 mm doors with max 2400H x 1500W
- Soft opening and closing dampening
- 20 kg door weights
- Running and guide tracks inside the cabinet



OPK Spaceship 80

- Mounting on wall or ceiling
- Soft close and soft opening
- Up to 40 mm thick doors
- 80 kg weight capacity



OPK Spaceship 80 Glass

- Mounting on wall or ceiling
- Soft close and soft opening
- 8 - 10 mm glass no drilling required
- 80 kg weight capacity



OPK Spaceship 80 Synchro

- Both doors open and close together
- Soft opening and closing dampening
- Door widths up to 1200 mm 35 - 45 mm
- 80 kg weight capacity



OPK Spaceship 160 W

- For 35 - 50 mm thick Wooden doors
- Soft opening and closing dampening
- Door widths up to 1500 mm
- 160 kg weight capacity





OPK Navigator Sliding Door system

- Traditional look sliding systems
- For sliding wooden doors
- Soft opening and closing dampening
- 40 - 80 kg capacity



OPK Aircraft Sliding Door system

- Doors are flush when unit is closed
- Up to 2400 mm wide cabinets
- Soft opening and closing dampening
- Launches 2023



OPK E-SPACE Door system

- Electronic opening of doors
- Glass or wood options
- Plug and play assembly
- 100 kg capacity



OPK E-SPACE Door system

- Opening by various methods
- Motion detector
- Hand swipe
- Mobile phone





To view our full range of products visit our showroom and advisory centre,
simply contact us to make an appointment



Flanagan Fittings
Falcon House
Dublin Airport Logistics Park
St. Margarets
Co. Dublin
K67 F303
Ireland.

Telephone
+353 (0)1 844 8400


Fax
+353 (0)1 844 8009


E-mail
sales@fff.ie

Web
www.fff.ie

 Find us on
Facebook FlanaganFittings

 @flanaganfits

 FlanaganFittings

 FlanaganFittings

