





Established in 1993, OPK Smart Home Technology Co, Ltd. has several manufacturing locations with over 1,200 employees and more than 50,000 sqm of operating space. The technology-oriented company has a comprehensive portfolio of sliding door fittings for all applications in the furniture fittings and architectural hardware sectors for wood, glass and aluminium frame solutions.

Excellent soft closing and running properties are the hallmark of the brands' products and therefore are unique. OPK have created a great reputation for its excellent products and continuous development. OPK were honoured to receive the 'High and New Technology Enterprise & Vision Furniture First Rate Quality' awards making them the market leader in the development of sliding door systems.

This development by OPK is based on professionalism, innovation, and quality. OPK develops, manufactures, and distributes the OPK Brand product range as well as a very large and customer-specific OEM range.

OPK Europe, based in Germany was the first branch outside of Asia. They celebrated the opening of the Horb am Neckar location in June 2018. Due to the rapid growth of brand popularity and sales, OPK has become one of the largest manufacturers of sliding door systems worldwide.



OPK Ocean Sliding Door system



OPK Ocean Sliding Door system



OPK Rotary Pocket Door system



OPK Sailing 4 Bi-Fold Door system



OPK Sailing 2 Bi-Fold Door system



OPK Spaceship 80 Door system



OPK Spaceship Synchro



OPK Navigator system



Ocean Sliding System

- Sliding system for wooden doors
- 80 kg weight capacity
- Door widths 530 - 1500 mm
- Door thickness 18 - 40 mm
- Door height ≤2800 mm
- Soft closing and opening on all doors
- Height adjustable ± 6 - 8 mm
- Kits for two doors and three doors
- Optional door handle / stabilisation profile for 18 mm doors


OPK Ocean 1 Sliding System

	Two Door Kit	Three Door Kit
Art. No.	OOCE2KIT	OOCE3KIT
Contents	1 pair Running System Outer Door 1 pair Guiding System Outer Door 1 pair Running System Inner Door 1 pair Guiding System Inner Door 4 pcs Soft Close Dampener 36 pcs self drilling screws 1 pc 4mm Hex Allen key	1 pair Running System Outer Door 1 pair Guiding System Outer Door 2 pair Running System Inner Door 2 pair Guiding System InnerDoor 6 pcs Soft Close Dampener 1 Central position Dampener 54 pcs self drilling screws 1 pc 4mm Hex Allen key

OPK Ocean 1 Accessories


Description		Art. Nr.	Finish	Dimensions
Top Running Track		OOCE25RT	Silver	2500 mm
Base Guiding Track		OOCE25GT	Silver	2500 mm
Straight Handle		OOCE25HB	Brushed Black	2500 mm
		OOCE25HS	Brushed Silver	2500 mm
Stabilisation Handle		OOCE25SHB	Brushed Black	2500 mm
		OOCE25SHS	Brushed Silver	2500 mm
Door Follower		OOCEDF	Titan/Black	60 x 20 x 25 mm

Installation Requirements

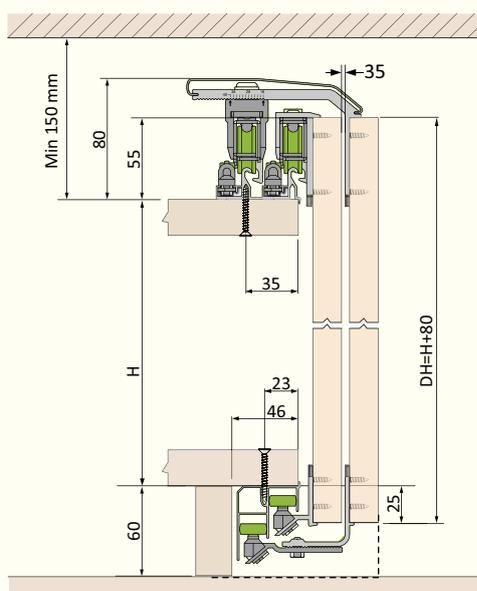

DH = Door Height
H = Cabinet Height

Installation Positions

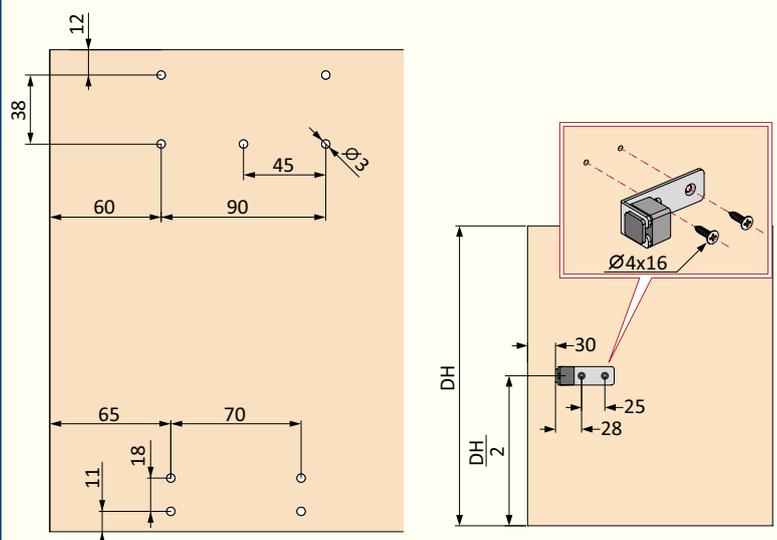

DH = Door Height



Submarine Sliding Door System





- Sliding door system for wooden doors
- 30 kg weight capacity
- Door widths 500 - 1500 mm
- Door thickness 16 - 25 mm
- Door heights ≤ 2400
- Soft closing and opening on all doors
- Height adjustable ± 2 mm
- Recesses Upper sliding track and Lower Guide track (ordered separately)

Submarine Sliding Door System Soft Close

	Soft Close both directions
Art. No.	OSUB30SC
Max Door Weight	30 kg
Soft Close per door	2

Note: One kit is for a single door


OPK Submarine Accessories

Description		Art. Nr.	Finish	Dimensions
Recessed Top Guide Track (2 pcs required)		OSUB25GT1	Silver	2500 mm
Recessed Base Running Track (2 pcs required)		OSUB25RT1	Silver	2500 mm
Surface Mounted Dual Top Guide Track Door width ≤25 mm		OSUB25GT2S	Silver	2500 mm
Surface Mounted Dual Base Running Track Door width ≤25 mm		OSUB25RT2S	Silver	2500 mm
Door Follower		OOCEDF	Titan/Black	60 x 20 x 25 mm




Submarine Sliding Door System

Individual Tracks recessed top and bottom

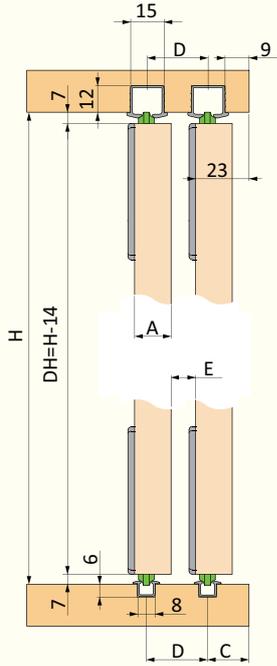


A	16	18	19	20
C	16.5	16.5	16.5	16.5
D	22	24	25	26
E	6	6	6	6

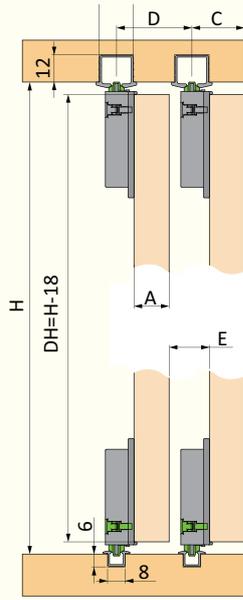


A	16	18	19	20
C	25	27	28	29
D	34	36	37	38
E	18	18	18	18

Surface Mounted Tracks

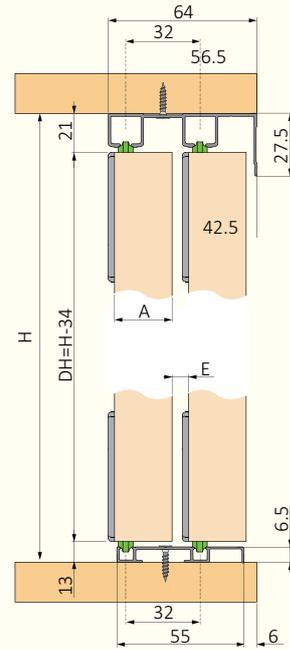


A	20	22	25
E	12	10	7


Inset Application

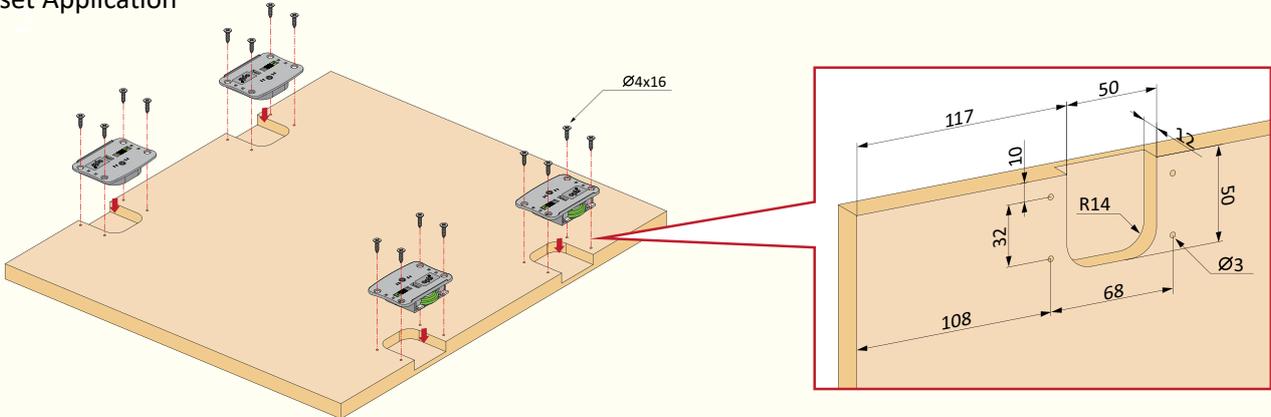


Surface Mount Application

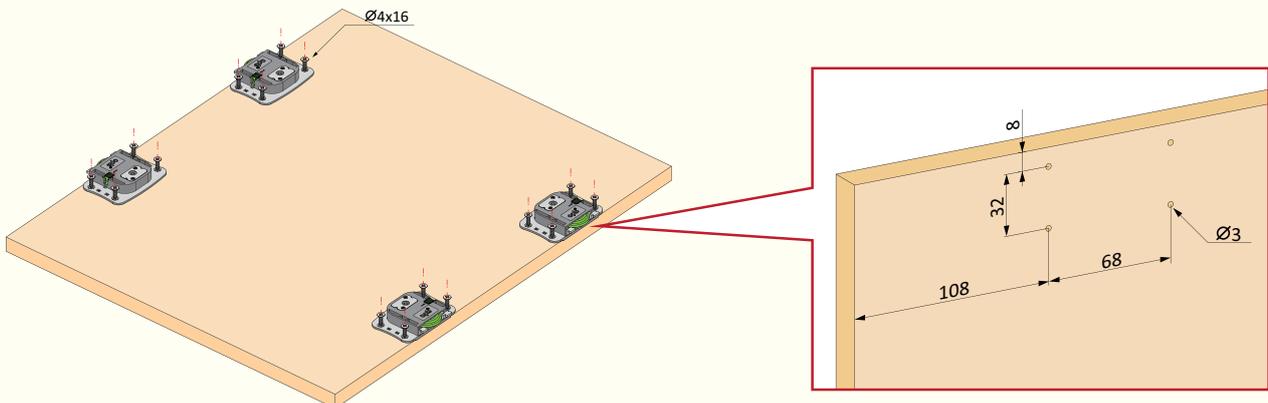


Door Width Calculation

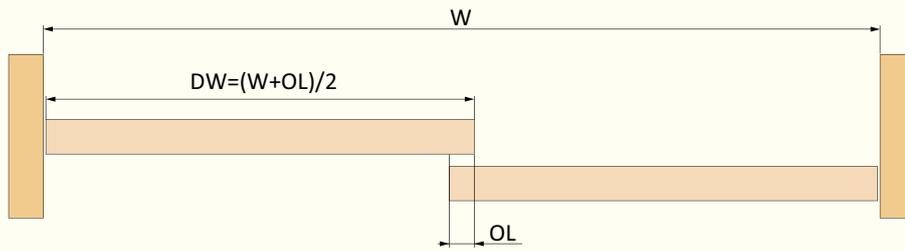


Minimum Door Width

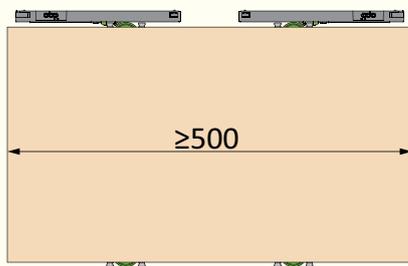

Door Follower Position

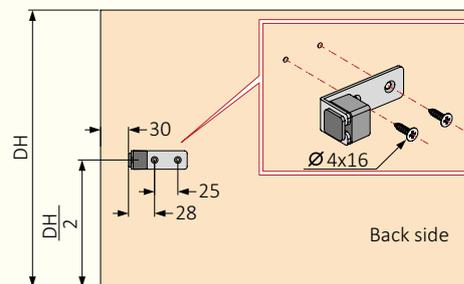

Dual Soft Close fixing

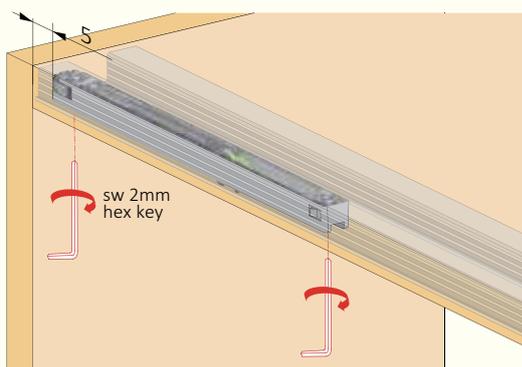

Rotary Pocket Door System




Rotary Pocket Door System

- Pocket system for single leaf wooden doors
- 15-35 kg weight capacity
- Door widths 420 - 600 mm
- Door thickness 18 - 25 mm
- Door heights 1800 - 2850 mm
- Soft closing and opening on all doors
- Height adjustable ± 3 mm
- Kits for left hand or right hand doors

OPK Rotary Pocket Door System

	Left Opening Door Kit	Right Opening Door Kit
Art. No.	OROTSETL	OROTSETR

Technical Drawings

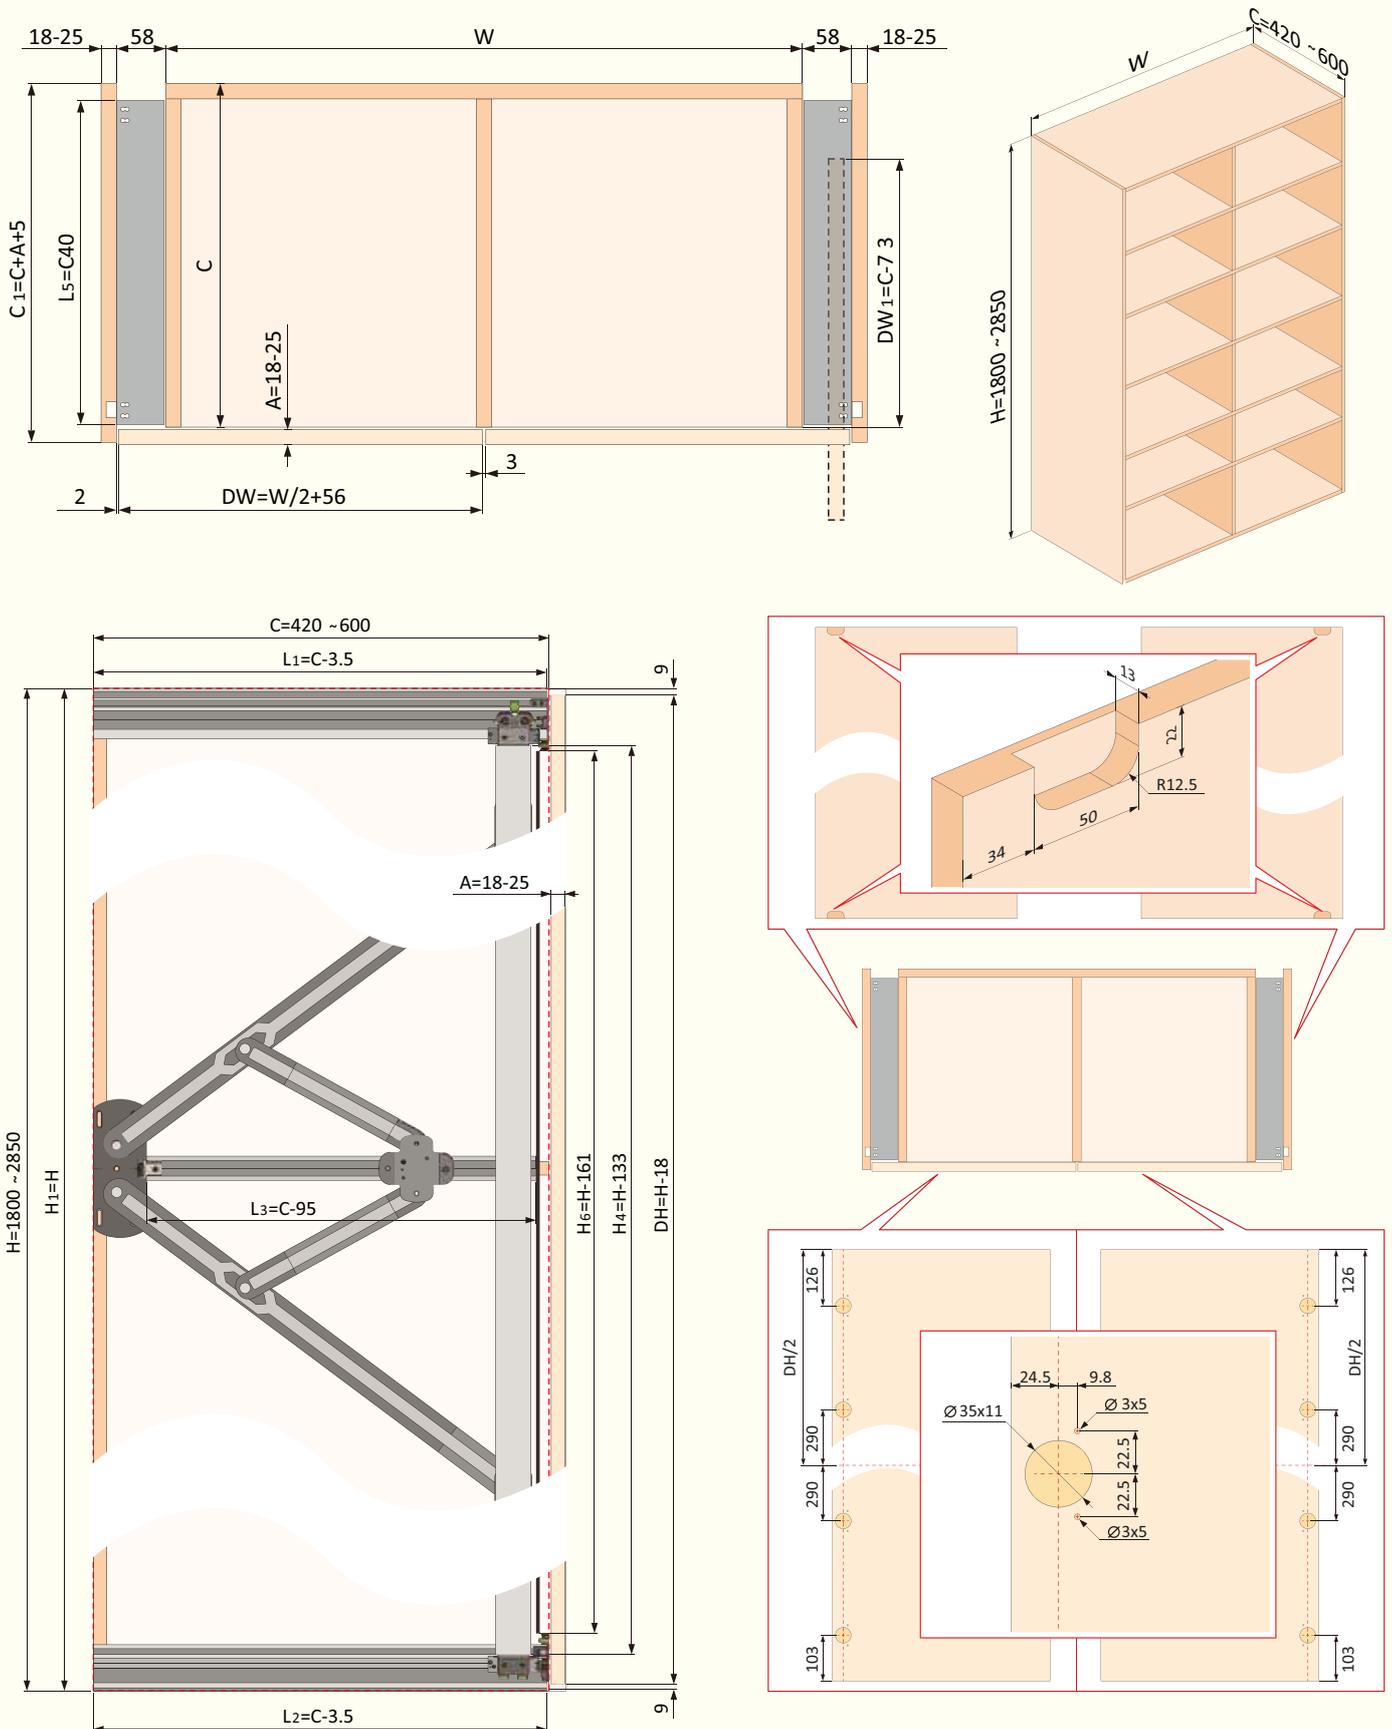

Sailing 4 Bi-Fold System





Sailing 4 Bi-folding Door System

- Bi-Fold system wooden doors
- Two solutions with 15 or 30 kg weight capacity
- Door widths 250 - 500 mm
- Door thickness 18 - 25 mm
- Door heights ≤ 1500 (15kg) or ≤ 2450 (30kg)
- Soft closing and opening on all doors
- Height adjustable ± 3 mm
- Upper sliding track for all solutions
- Lower Guide track only used for door height ≥ 1500 mm
- Kits include Centre Drilling Template


Sailing 4 Bi-Fold Door System

	Door ≤ 1500 mm	Door ≤ 2450 mm
Art. No.	OSAI415	OSAI430
Max Weight	15 kg	30 kg
Centre Hinges	2	3
Upper Track required	Yes	Yes
Lower Track required	No	Yes


OPK Sailing 4 Bi-Fold Door Accessories

Description		Art. Nr.	Finish	Dimensions
Upper Running Track		OSAI4UT1B	Anadised Black	1000 mm
Lower Guide Track		OSAI4GT1B	Anadised Black	1000 mm


Door Height ≤1500 mm

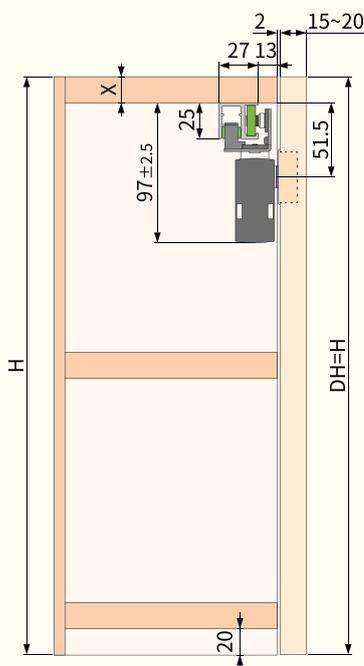


Door Height ≤2450 mm

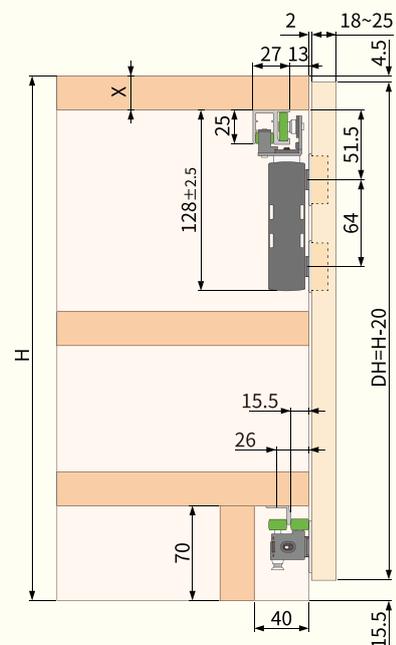

Door Widths

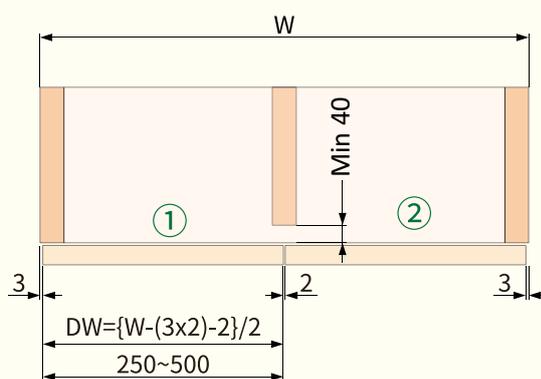

Minimum Gap

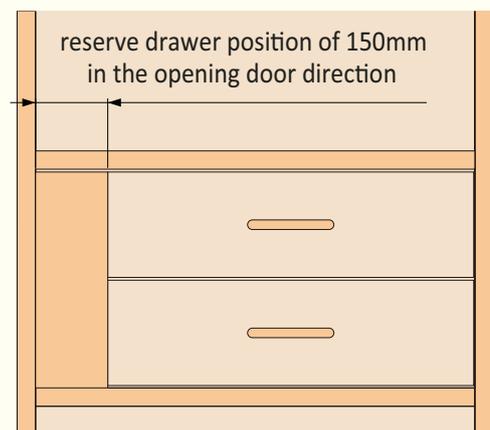

Sailing 2 Bi-Fold System



Sailing 2 Bi-folding Door System


- Bi-Fold system wooden doors
- Simple Pivot Arm for Bi-folding
- Door widths 300 - 400 mm
- Door thickness 18 - 20 mm
- Door heights ≤ 2400
- Soft closing achieved by hinges
- Height adjustable ± 3 mm
- Weight capacity dictated by hinges
- Kits include Centre Drilling Template

Sailing 2 Bif-Fold Door System

	Door ≤ 2450 mm
Art. No.	OSAI2
Max Weight	Dictated by hinges
Centre Hinges	4



Outer Top Mounting

Inner Top Mounting

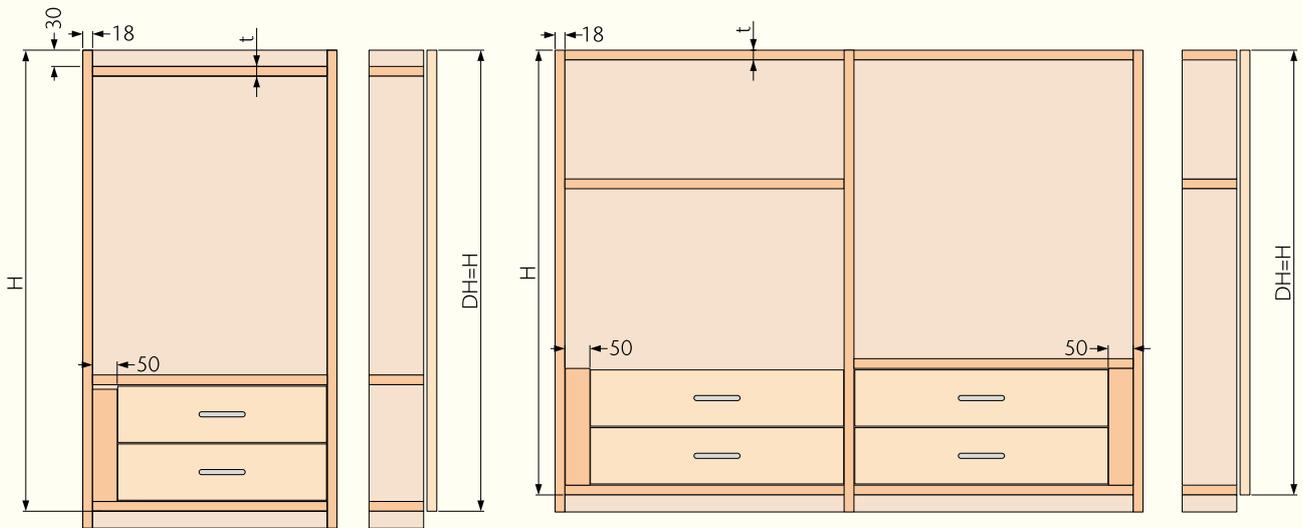


Two Doors

Four Doors

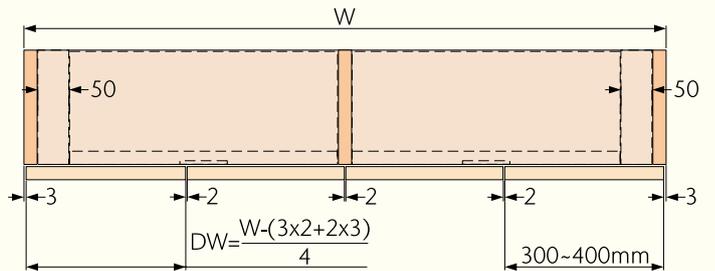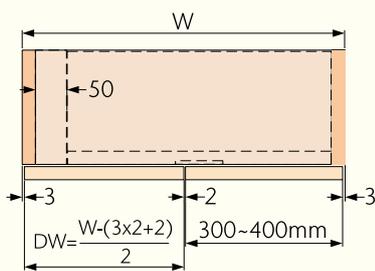

Pivot Arm fixing positions

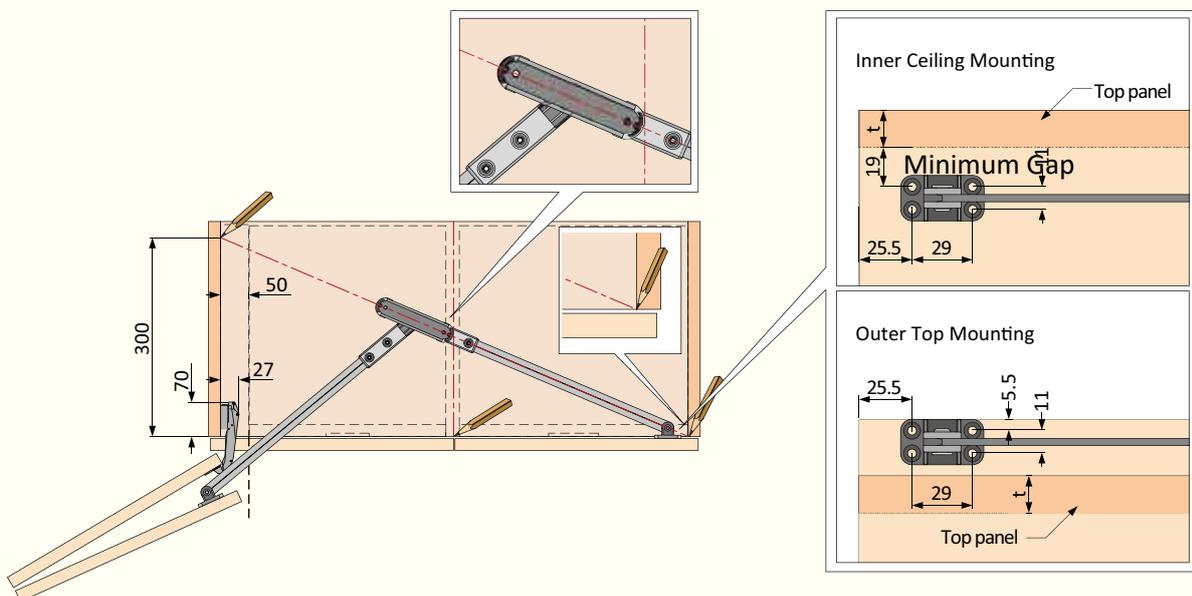



SPACESHIP 80 Standard Pocket

Page 17

- Weight capacity of 80 kg
- Standard fixings
- Wood Doors ≥ 580
- Soft Close and Opening
- Door thickness 35 - 45 mm
- Height adjustable ± 3 mm
- 2050 mm track



SPACESHIP 80 Minimal Pocket

Page 19

- Weight capacity of 80 kg
- Concealed fixings
- Wood Doors ≥ 580
- Soft Close and Opening
- Door thickness 35 - 45 mm
- Height adjustable ± 3 mm
- 2050 mm track



SPACESHIP 80 Glass Pocket

Page 21

- Weight capacity of 80 kg
- Glass fixings
- Wood Doors ≥ 580
- Soft Close and Opening
- Door thickness 8 - 10 mm
- Height adjustable ± 3 mm
- 2050 mm track



SPACESHIP 80 Standard Top Mounting

Page 23

- Weight capacity of 80 kg
- Standard fixings
- Wood Doors ≥ 580
- Soft Close and Opening
- Door thickness 35 - 45 mm
- Height adjustable ± 3 mm
- 2050 mm track



SPACESHIP 80 Minimal Top Mounted

Page 25

- Weight capacity of 80 kg
- Concealed fixings
- Wood Doors ≥ 580
- Soft Close and Opening
- Door thickness 35 - 45 mm
- Height adjustable ± 3 mm
- 2050 mm track

SPACESHIP 80 Glass Top Mounted

Page 27

- Weight capacity of 80 kg
- Soft closing and opening
- Door widths ≥ 580 mm
- Door thickness 8 - 10 mm
- Height adjustable ± 3 mm
- 2050 mm track



SPACESHIP 80 Wall Mounted

Page 29

- Weight capacity of 80 kg
- Soft closing and opening
- Door widths ≥ 580 mm
- Door thickness ≤ 40 mm
- Height adjustable ± 3 mm
- 2050 mm track



SPACESHIP 80 Glass Wall Mounted

Page 31

- Weight capacity of 80 kg
- Soft closing and opening
- Door widths ≥ 580 mm
- Door thickness 8 - 10 mm
- Height adjustable ± 3 mm
- 2050 mm track



SPACESHIP 80 Synchronised Dual Door Top Mounting

Page 33

- Door Weight capacity ≤ 50 kg
- Soft closing
- Door widths ≥ 580 mm
- Door thickness 35 - 45 mm
- Height adjustable ± 3 mm
- 2 x 2050 mm track




SPACESHIP 160 Minimal Top Mounted

Page 35


- Weight capacity of 160 kg
- Soft closing and opening
- Door widths ≥ 760 mm
- Door thickness 35 - 50 mm
- Height adjustable ± 3 mm
- 2050 mm track



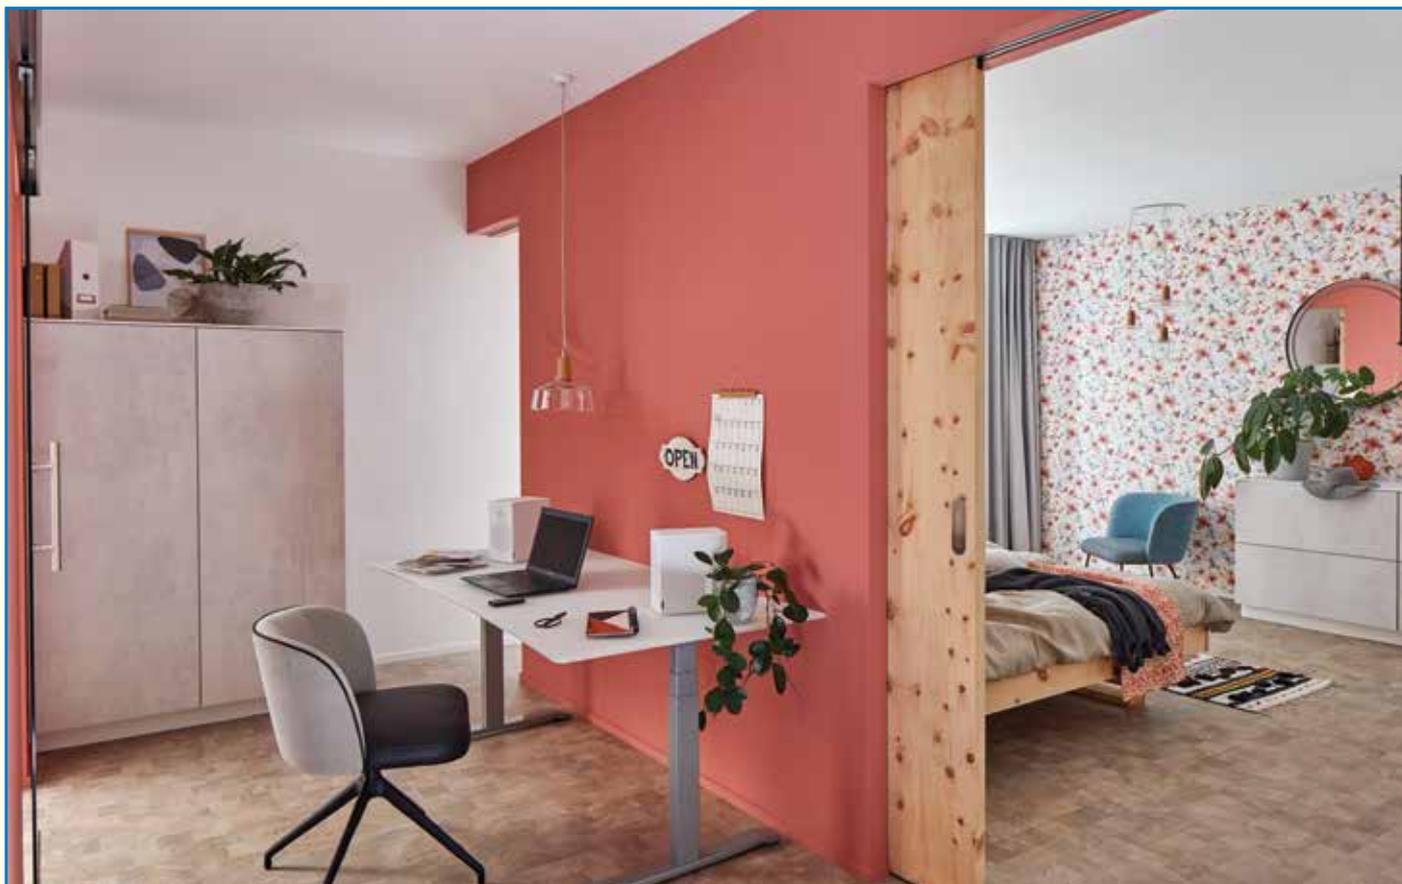

Spacship 80 Standard Pocket System

- Weight capacity of 80 kg
- Soft closing and opening
- Door widths ≥ 580 mm
- Door thickness 35 - 45 mm
- Height adjustable ± 3 mm
- 2050 mm track
- Easy Assembly and adjustment




Spacship 80 Standard Pocket

	Standard Pocket Door
Art. No.	OSPA80WPK20
Max Weight	80 kg
Door widths	≥ 580 mm
Track Length	2050 mm
Door Thickness	35 - 45 mm

Optional Extension Tracks


Art. No	Description
OSPA80UMT20	Upper mounting track 2050 mm
OSPA80URT20	Upper Running track 2050 mm
OSPA80CB100	Connecting bracket to join 2 upper running tracks 100 mm
OSPA80WGT12	Lower guide track for wooden doors 1250 mm

Pocket and Door Dimensions

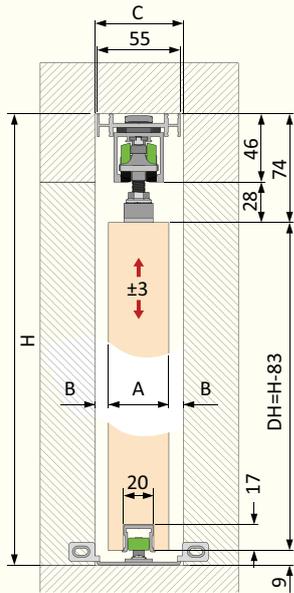


A	35	40	45
B	10	7.5	7.5
C	55	55	60


Track Dimensions

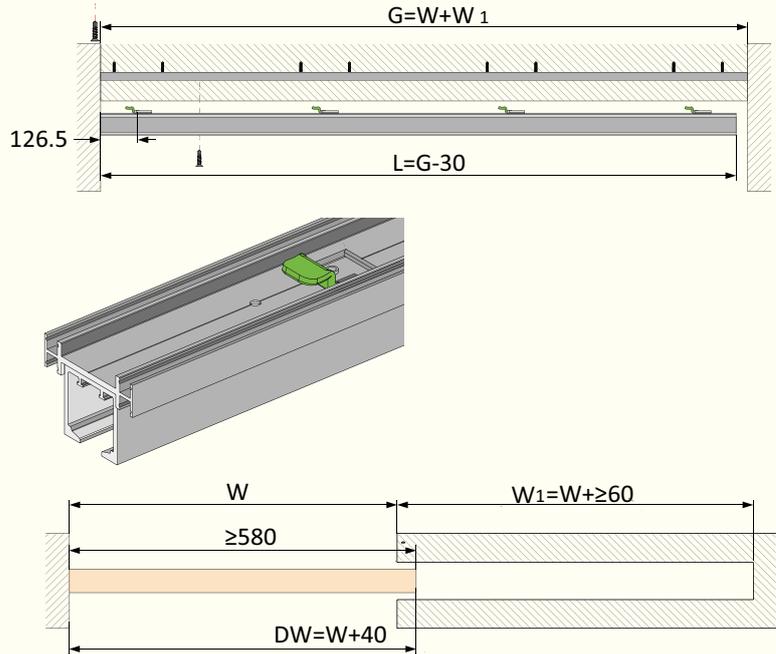


Door Processing

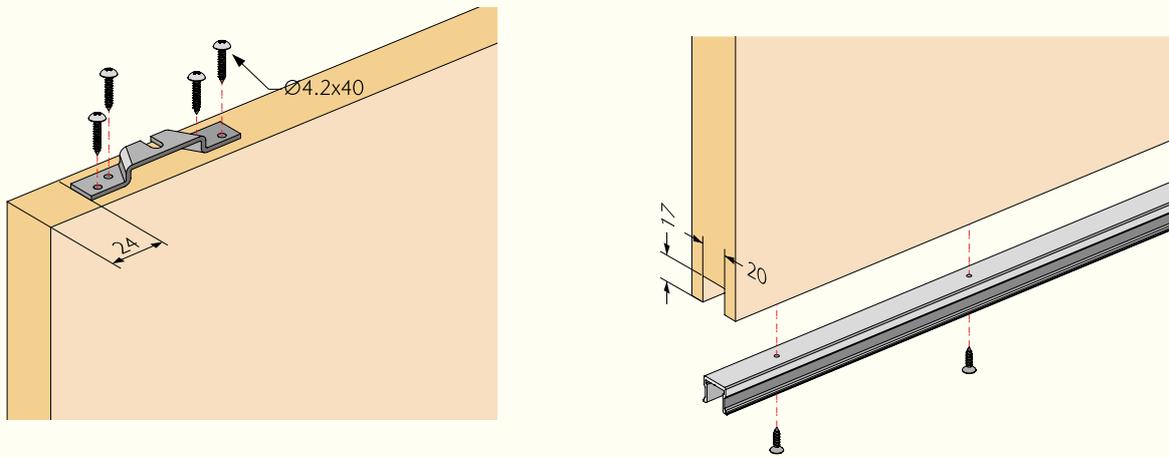


Fixing Positions

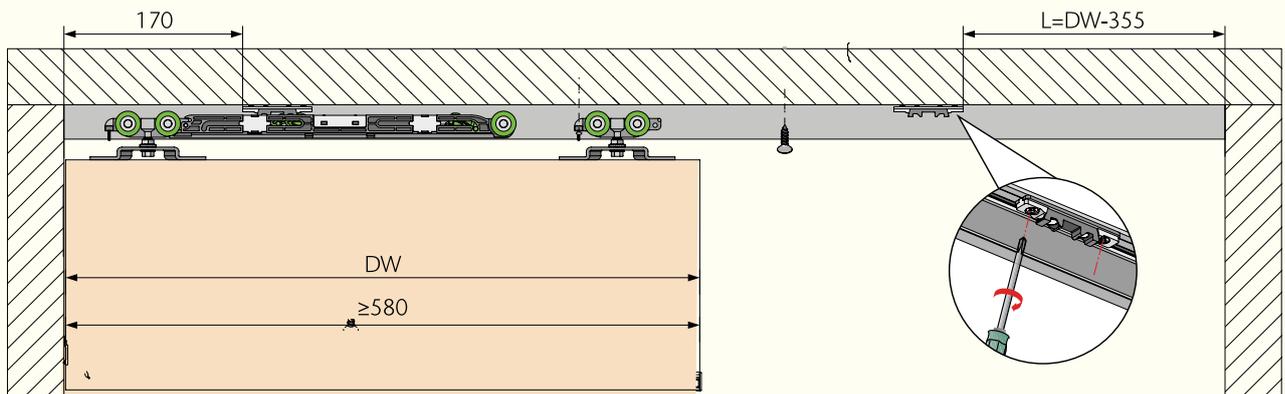

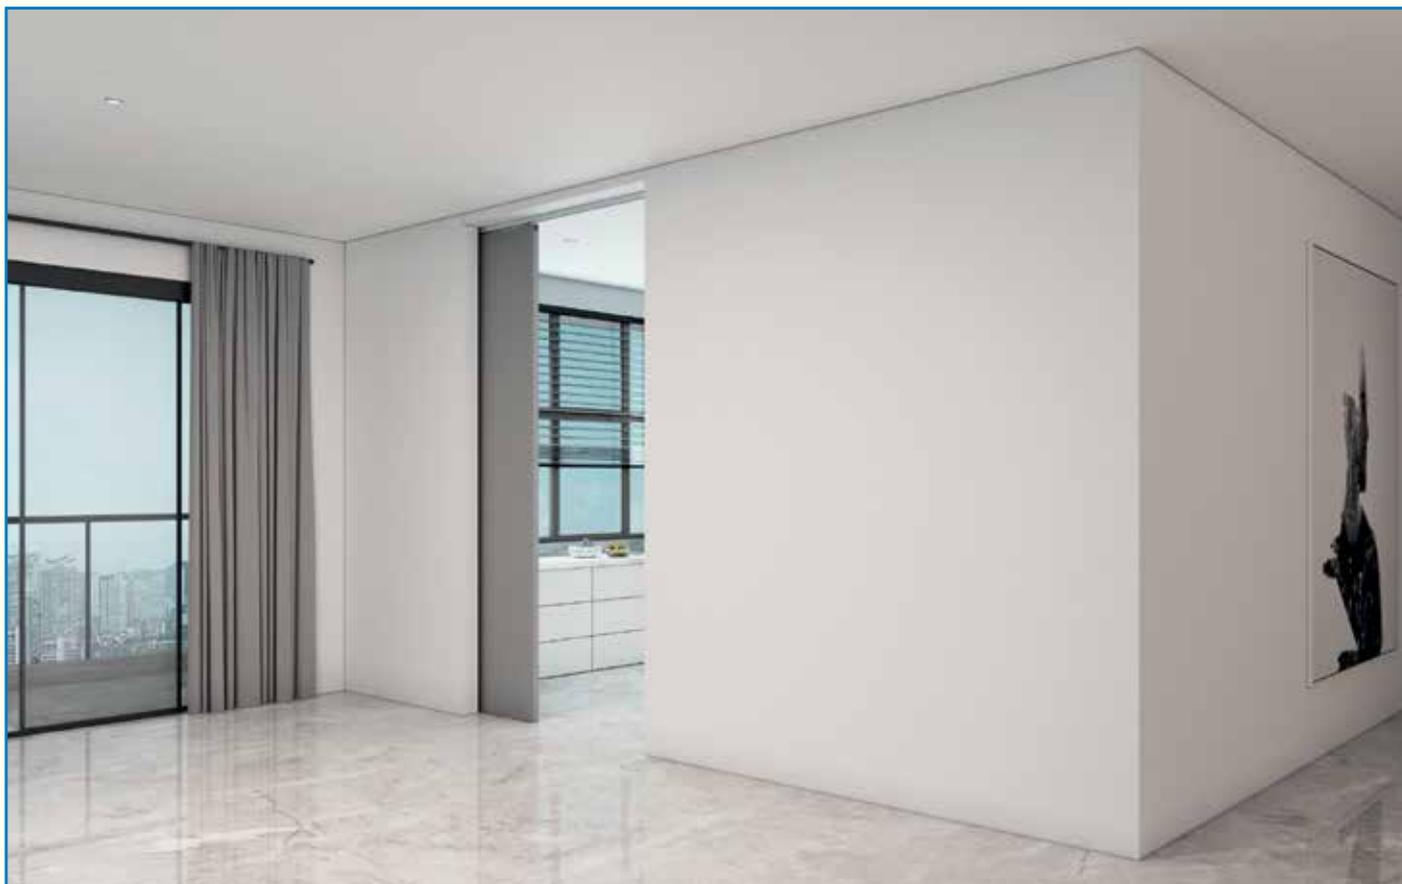

Spaceship 80 Minimal Pocket System

- Weight capacity of 80 kg
- Soft closing and opening
- Door widths ≥ 580 mm
- Door thickness 35 - 45 mm
- Height adjustable ± 3 mm
- 2500 mm track
- Easy Assembly and adjustment




Spaceship 80 Minimal Pocket

	Sliding Pocket Door
Art. No.	OSPA80WMK25
Max Weight	80 kg
Door widths	≥ 580 mm
Track Length	2500 mm
Door Thickness	35 - 45 mm

Optional Extension Tracks


Art. No	Description
OSPA80UMT20	Upper mounting track 2050 mm
OSPA80URT20	Upper Running track 2050 mm
OSPA80CB100	Connecting bracket to join 2 upper running tracks 100 mm
OSPA80WGT12	Lower guide track for wooden doors 1250 mm

Pocket and Door Dimensions


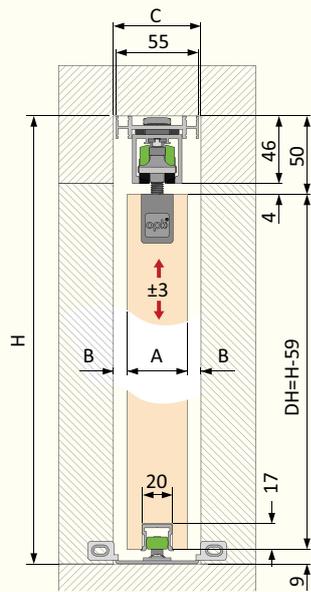


A	35	40	45
B	10	7.5	7.5
C	55	55	60


Track Dimensions

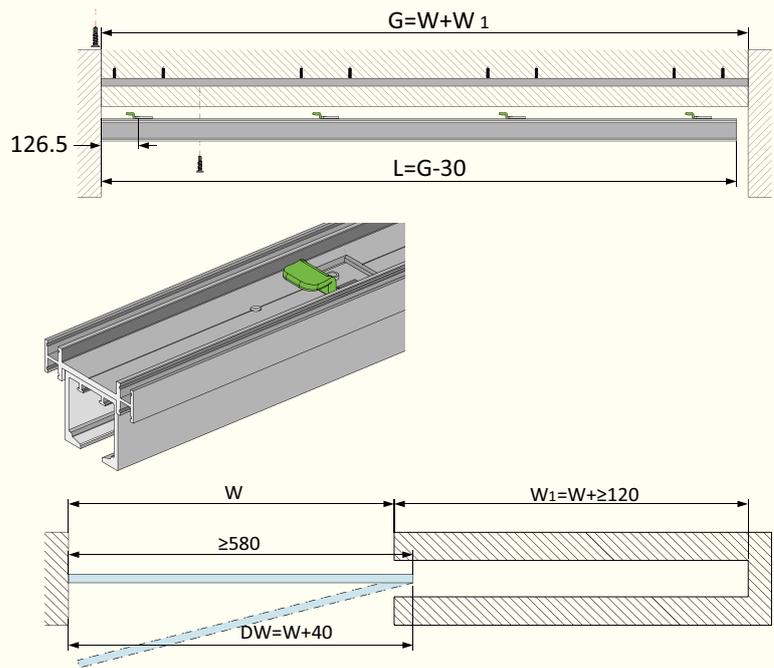


Door Processing

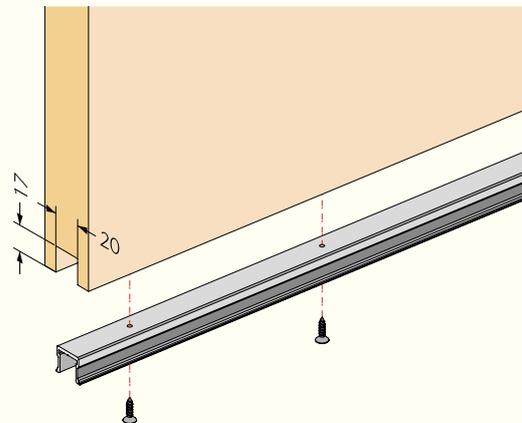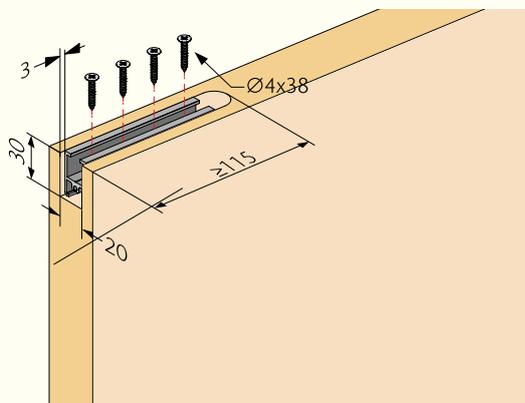


Fixing Positions

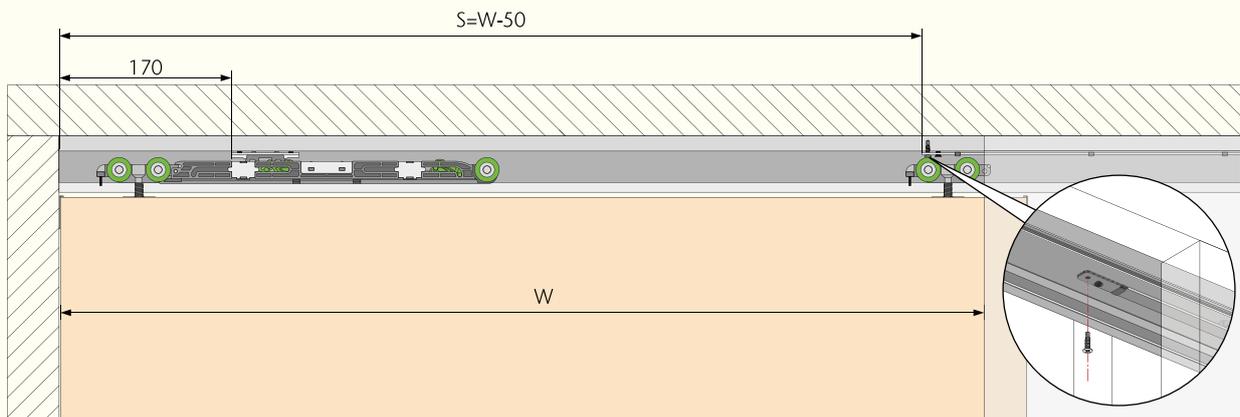

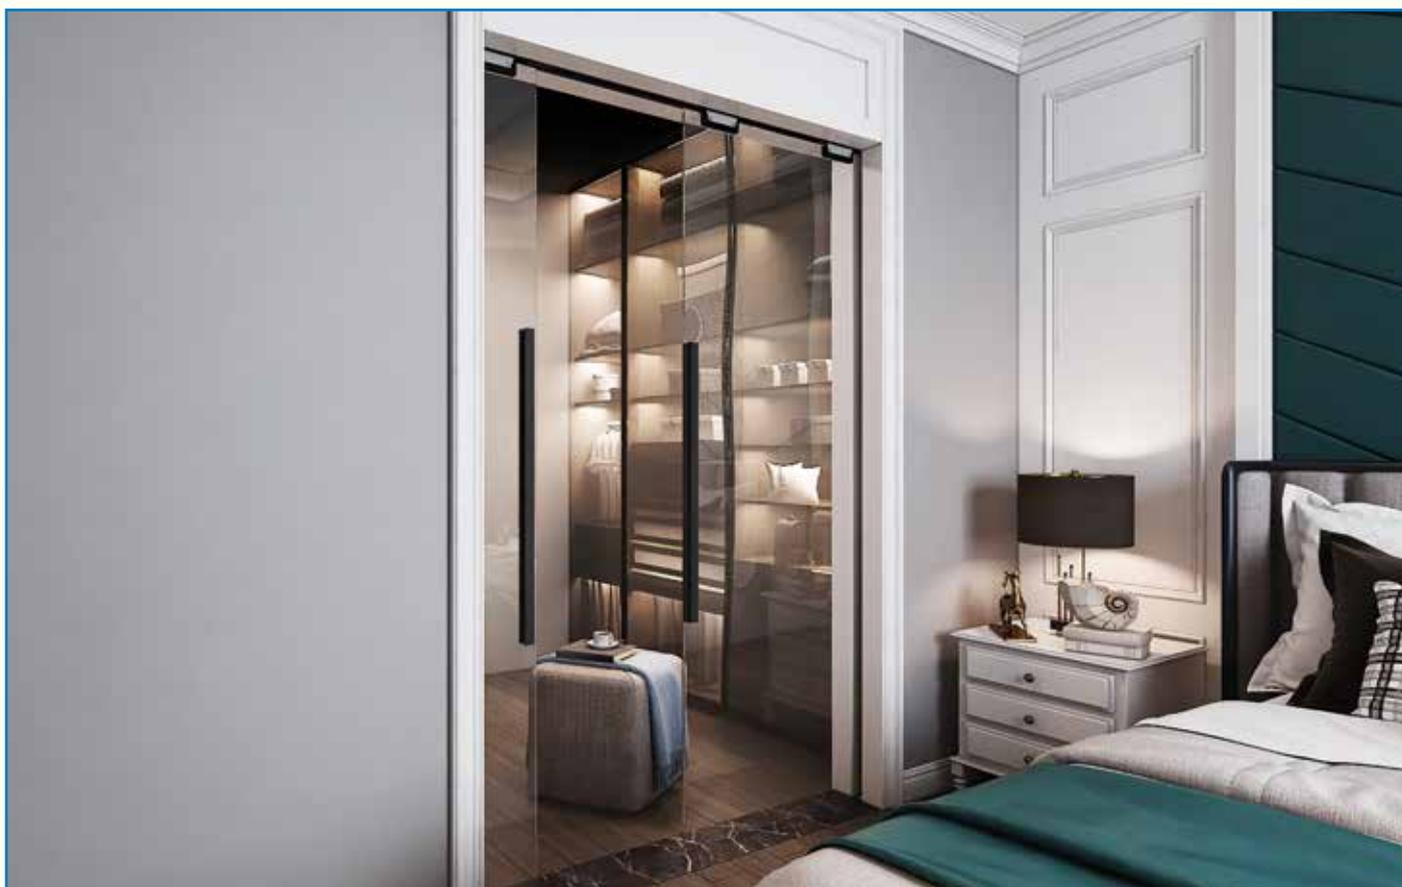

Spaceship 80 Glass Pocket System

- Weight capacity of 80 kg
- Soft closing and opening
- Door widths ≥ 580 mm
- Glass thickness 8 - 10 mm
- Height adjustable ± 3 mm
- 2050 mm track
- Easy Assembly and adjustment




Spaceship 80 Glass Pocket

	Sliding Pocket Door
Art. No.	OSPA80GPK20
Max Weight	80 kg
Door widths	≥ 580 mm
Track Length	2500 mm
Door Thickness	8 - 10 mm


Optional Extension Tracks

Art. No	Description
OSPA80UMT20	Upper mounting track 2050 mm
OSPA80URT20	Upper Running track 2050 mm
OSPA80CB100	Connecting bracket to join 2 upper running tracks 100 mm


Pocket and Door Dimensions

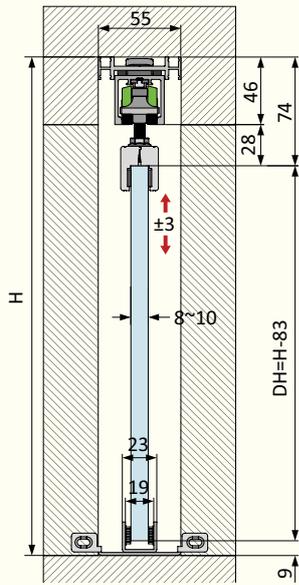


Track Dimensions

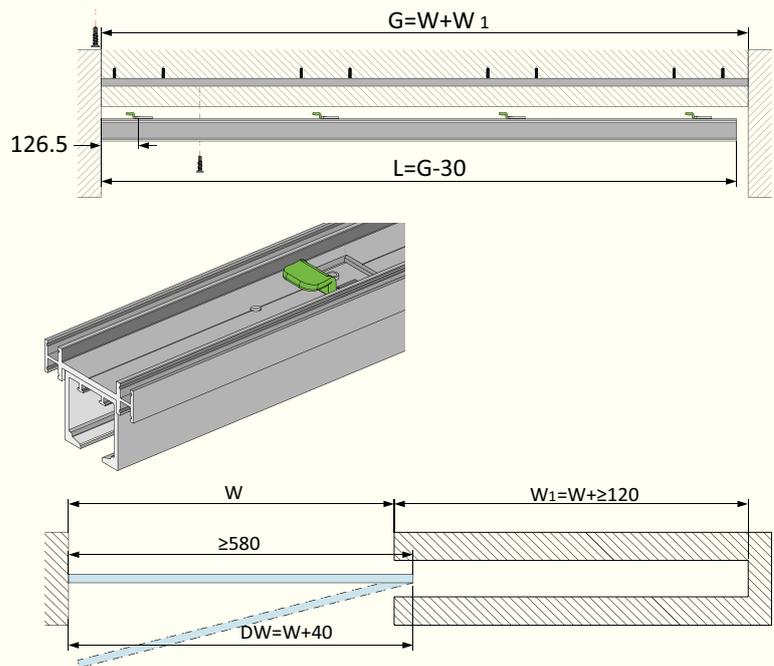


Door Processing

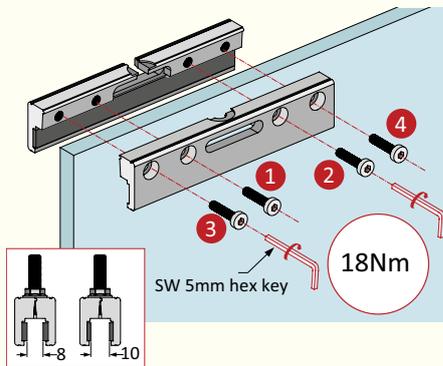


Fixing Positions

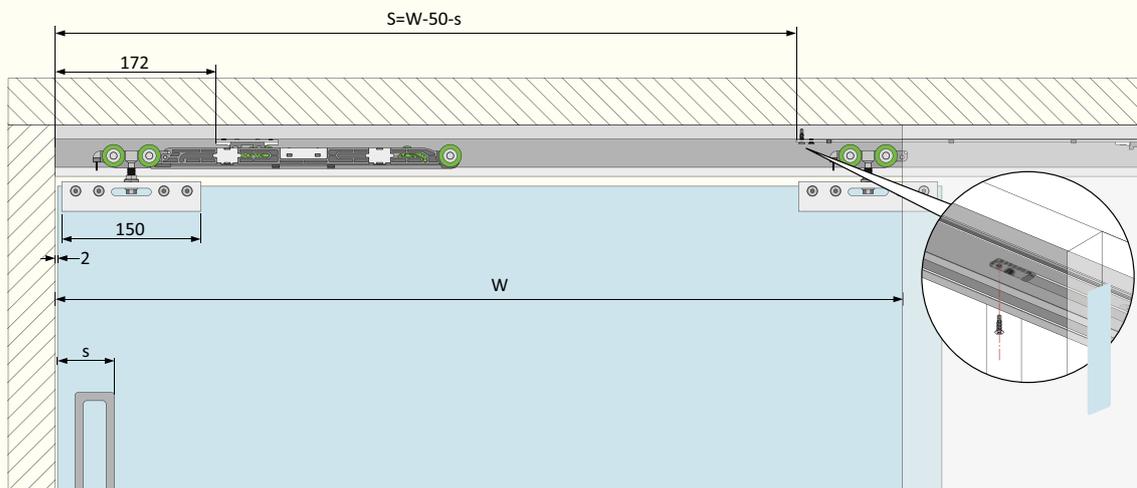

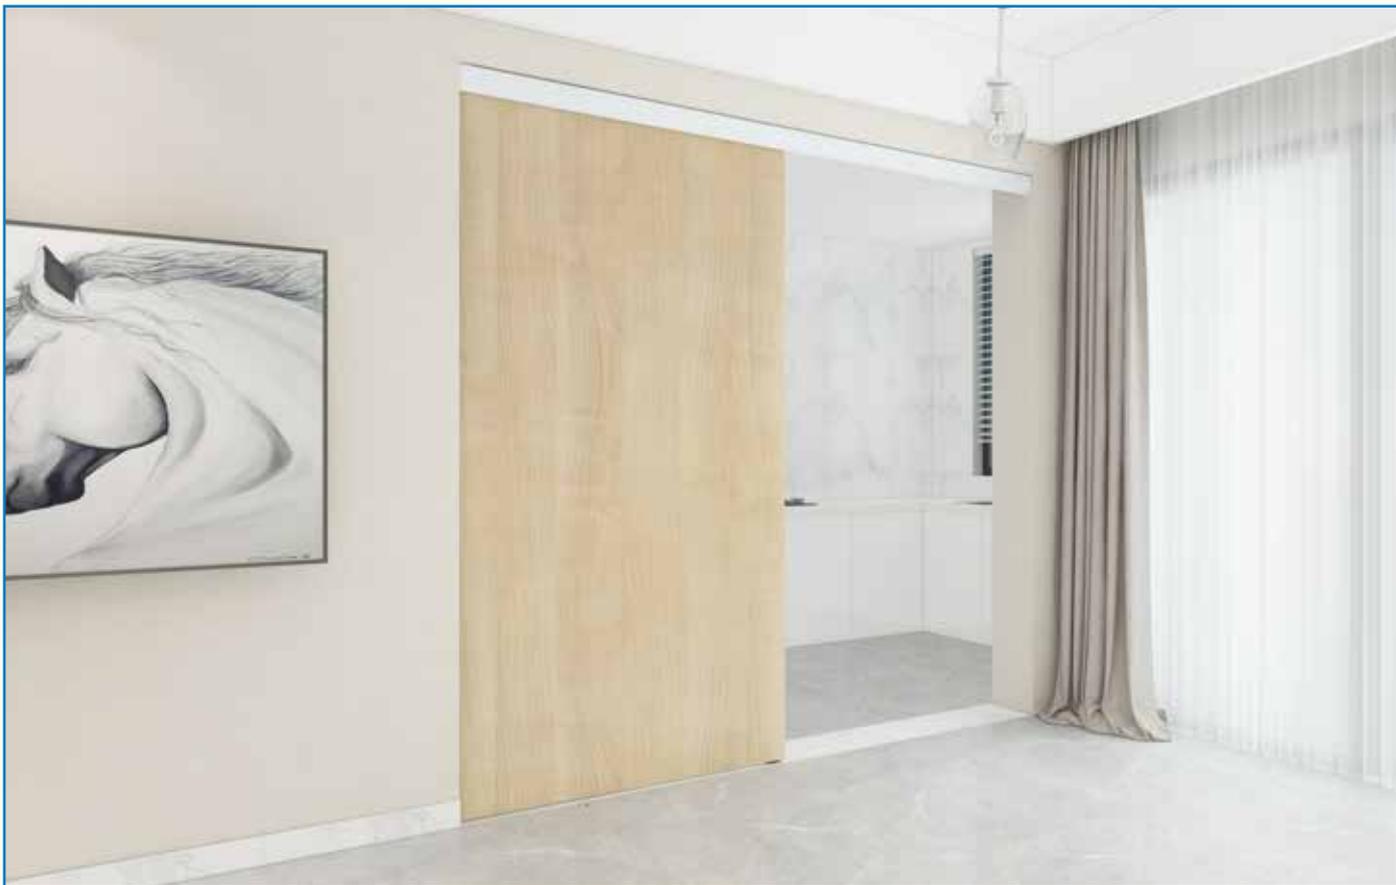

Spacship 80 Standard Top Mounted

- Weight capacity of 80 kg
- Soft closing and opening
- Door widths ≥ 580 mm
- Door thickness 35 - 45 mm
- Height adjustable ± 3 mm
- 2050 mm track
- Easy Assembly and adjustment




Spacship 80 Standard Top Mounted

	Standard Ceiling / Top Mounted
Art. No.	OSPA80WTK20
Max Weight	80 kg
Door widths	≥ 580 mm
Track Length	2050 mm
Door Thickness	35 - 45 mm


Optional Extension Tracks

Art. No	Description
OSPA80URTS	Upper Running track 2050 mm
OSPA80CB100	Connecting bracket to join 2 upper running tracks 100 mm
OSPA80WGT12	Lower guide track for wooden doors 1250 mm


Door Dimensions

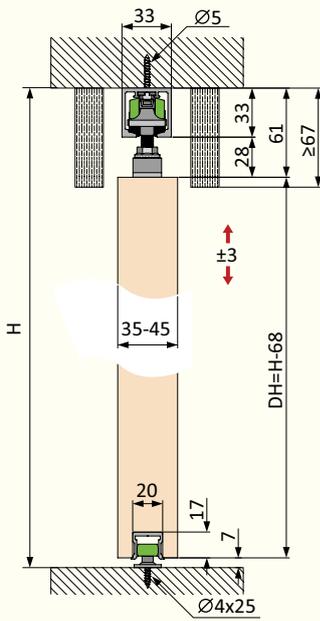


Track Dimensions

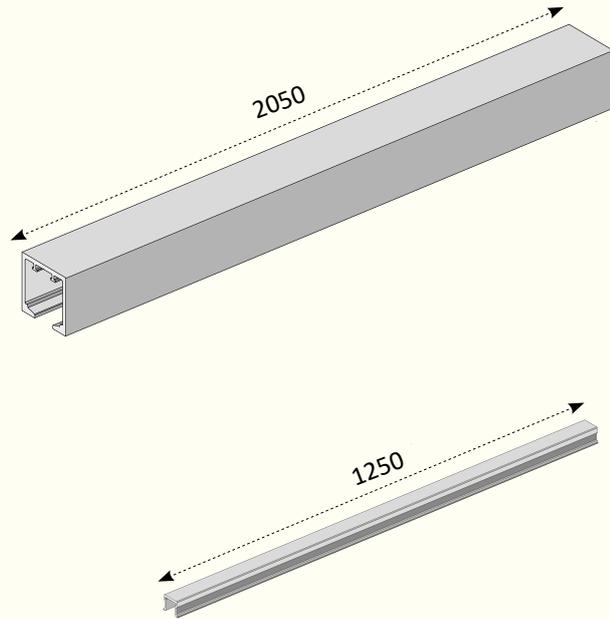


Door Processing

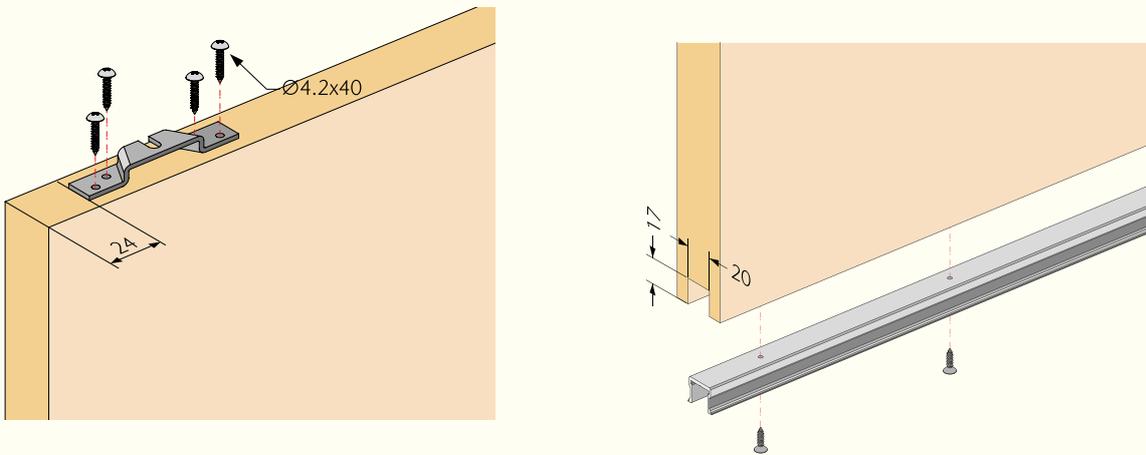


Fixing Positions

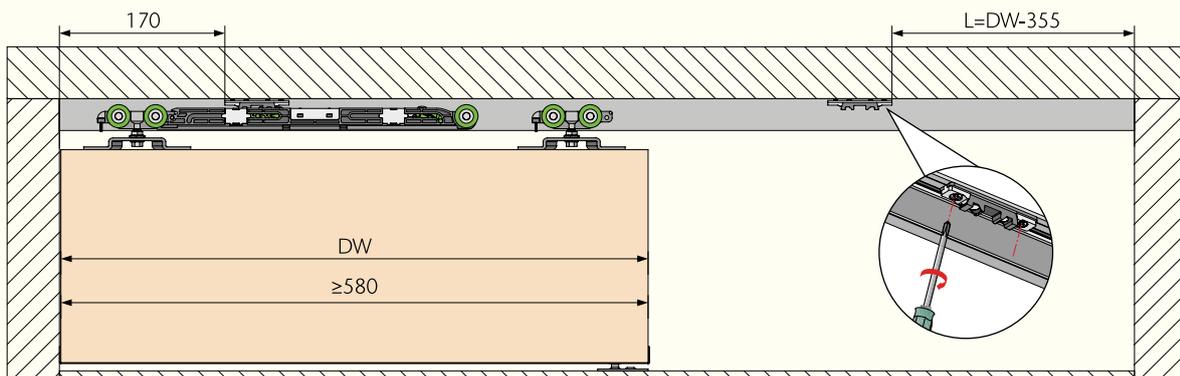

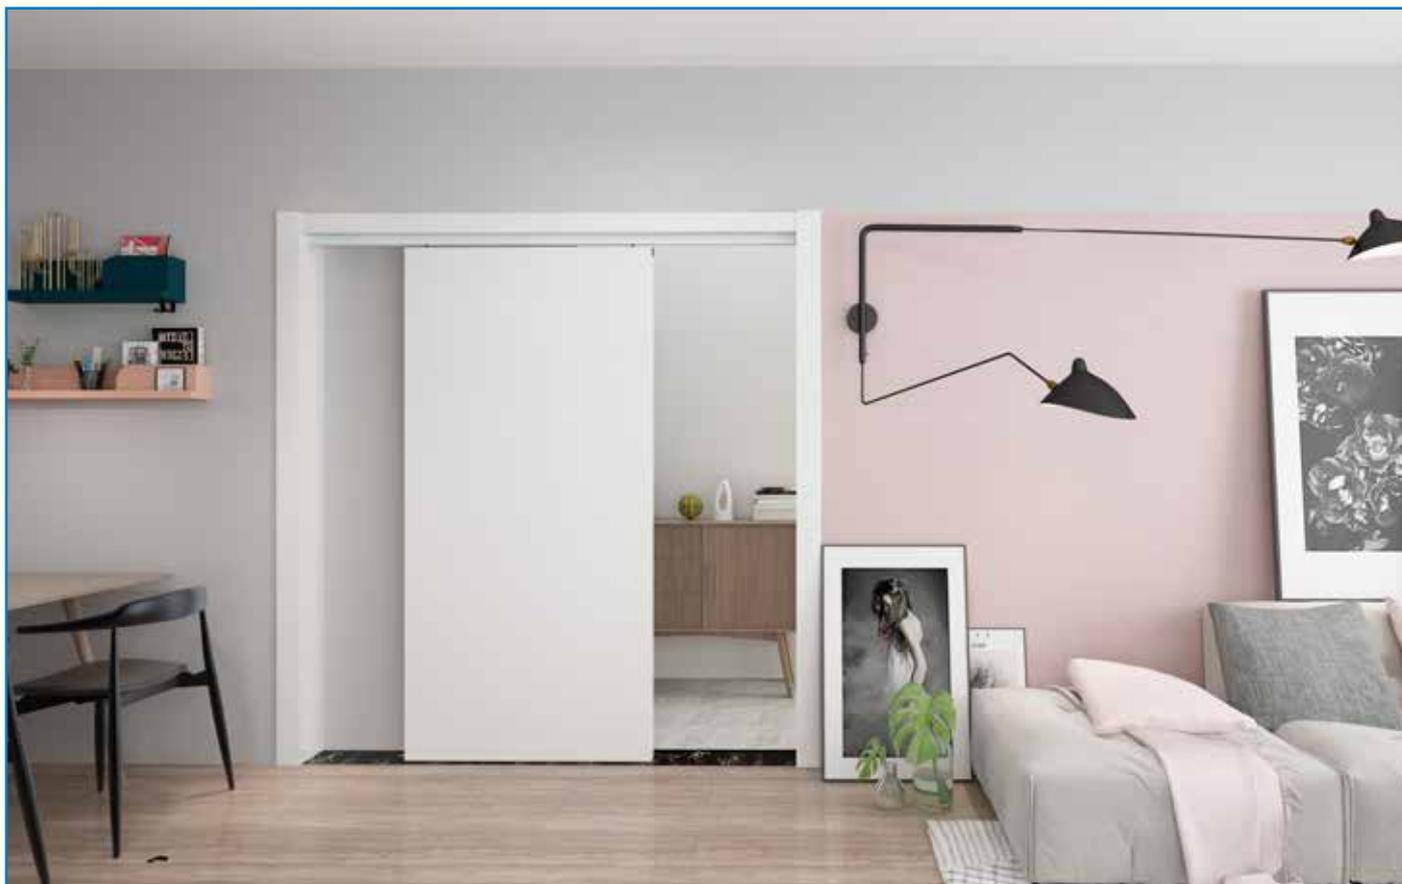

Spacship 80 Minimal Top Mounted

- Weight capacity of 80 kg
- Soft closing and opening
- Door widths ≥ 580 mm
- Door thickness 35 - 45 mm
- Height adjustable ± 3 mm
- 2050 mm track
- Easy Assembly and adjustment



Spacship 80 Minimal Top Mounted

	Minimal Ceiling / Top Mounting Door
Art. No.	OSPA80WTMK20
Max Weight	80 kg
Door widths	≥ 580 mm
Track Length	2050 mm
Door Thickness	35 - 45 mm


Optional Extension Tracks

Art. No	Description
OSPA80URTS	Upper Running track 2050 mm
OSPA80CB100	Connecting bracket to join 2 upper running tracks 100 mm
OSPA80WGT12	Lower guide track for wooden doors 1250 mm



Spacship 80 Glass Top Mounted

- Weight capacity of 80 kg
- Soft closing and opening
- Door widths ≥ 580 mm
- Door thickness 8 - 10 mm
- Height adjustable ± 3 mm
- 2050 mm track
- Easy Assembly and adjustment




Spacship 80 Glass Top Mounted

Glass Ceiling / Top Mounting Door	
Art. No.	OSPA80GTK20
Max Weight	80 kg
Door widths	≥ 580 mm
Track Length	2050 mm
Door Thickness	8 - 10 mm


Optional Extension Tracks

Art. No	Description
OSPA80URTS	Upper Running track 2050 mm
OSPA80CB100	Connecting bracket to join 2 upper running tracks 100 mm


Dimensions

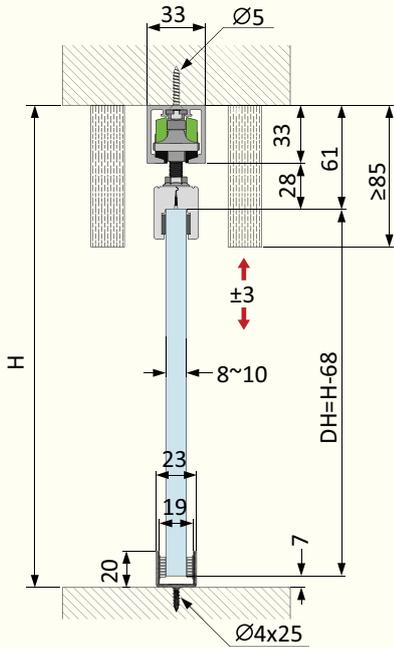


Track Dimensions

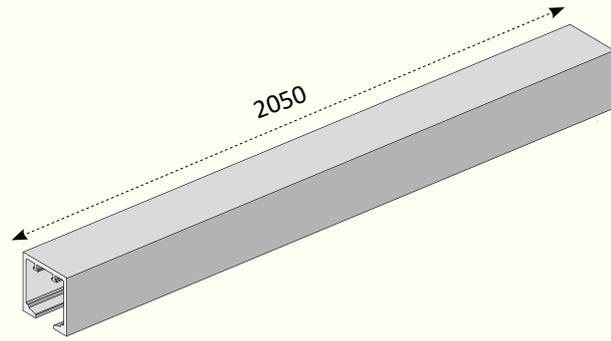

Door Processing

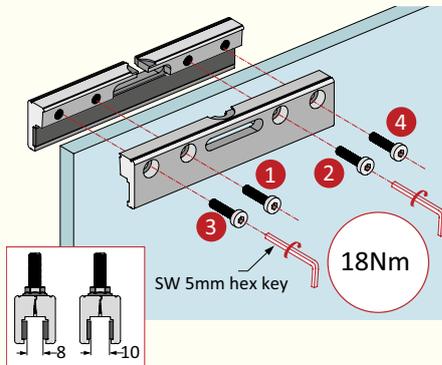


Door Widths

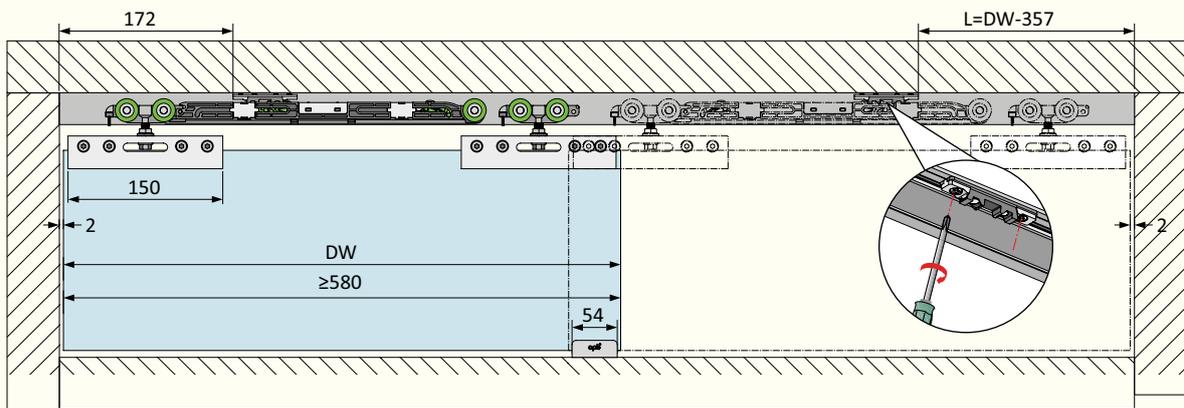




Spacship 80 Wood Door Wall Mounted

- Weight capacity of 80 kg
- Soft closing and opening
- Door widths ≥ 580 mm
- Door thickness ≤ 40 mm
- Height adjustable ± 3 mm
- 2050 mm track
- Easy Assembly and adjustment




Spacship 80 Wood Door Wall Mounted		
	Wood Door Wall Mounting No Skirting	Wood Door Wall Mounting 16 mm Skirting
Art. No.	OSPA80WWK20	OSPA80WWSK20
Max Weight	80 kg	80 kg
Door widths	≥ 580 mm	≥ 580 mm
Track Length	2050 mm	2050 mm
Door Thickness	≤ 40 mm	≤ 40 mm


Dimensions

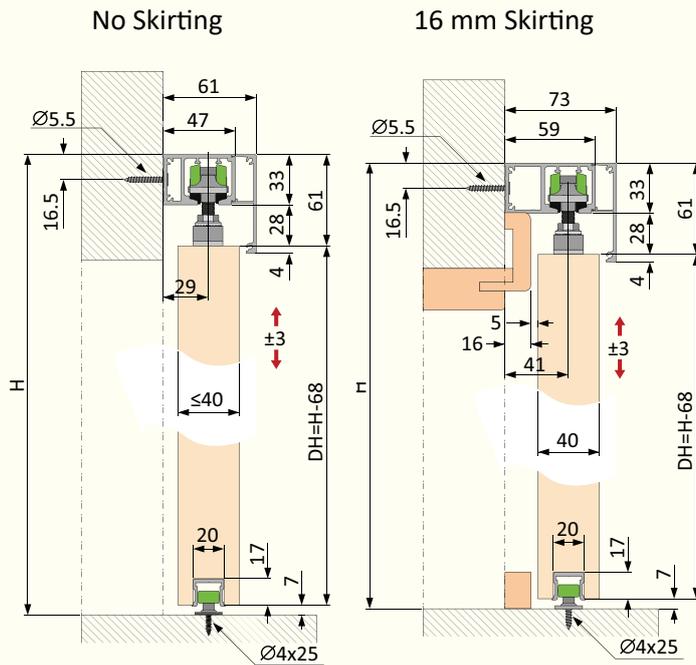


Track Dimensions

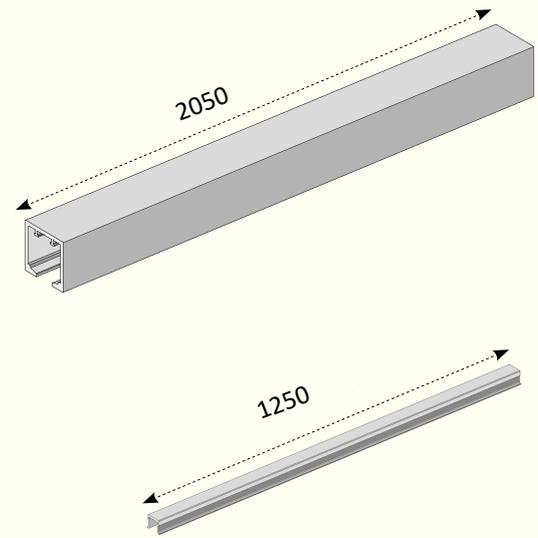

Door Processing

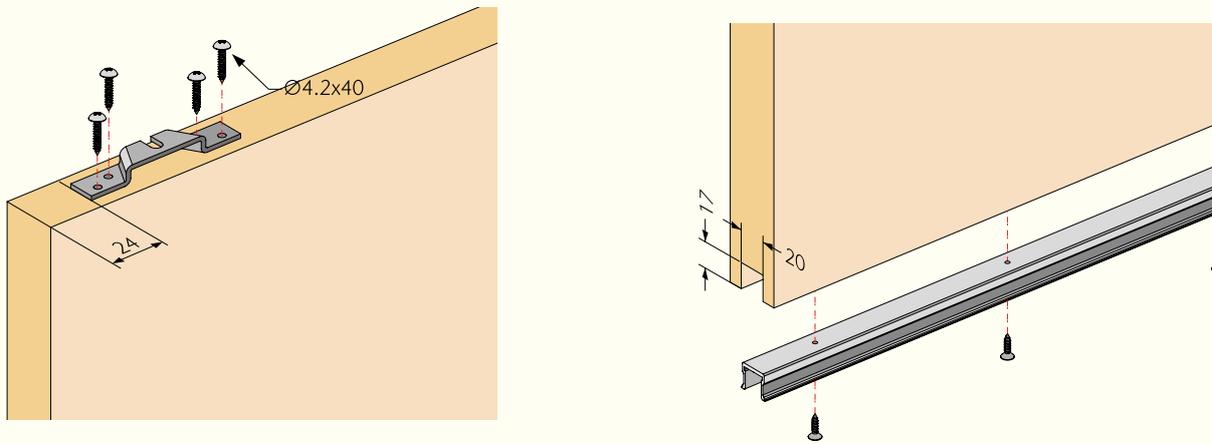


Door Widths

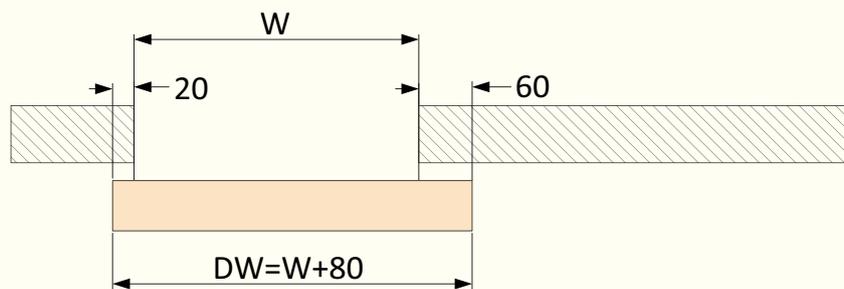



Spacship 80 Glass Door Wall Mounted

- Weight capacity of 80 kg
- Soft closing and opening
- Door widths ≥ 580 mm
- Door thickness 8 - 10 mm
- Height adjustable ± 3 mm
- 2050 mm track
- Easy Assembly and adjustment




Spacship 80 Glass Door Wall Mounted


Spacship 80 Glass Door Wall Mounted	
	Glass Door Wall Mounting
Art. No.	OSPA80GWK20
Max Weight	80 kg
Door widths	≥ 580 mm
Track Length	2050 mm
Door Thickness	8 - 10 mm

Dimensions


No Skirting

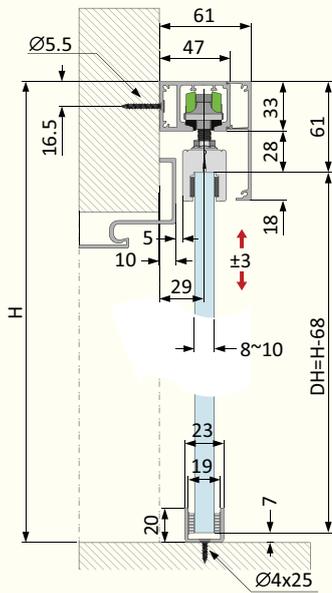


Track Dimensions

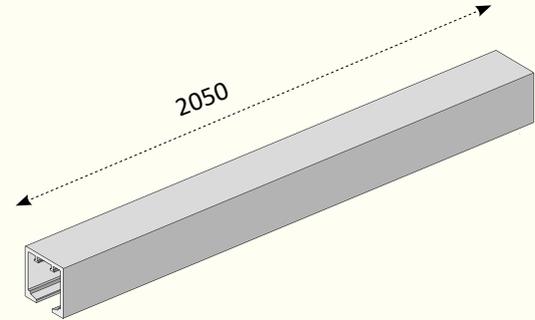


Door Fixings

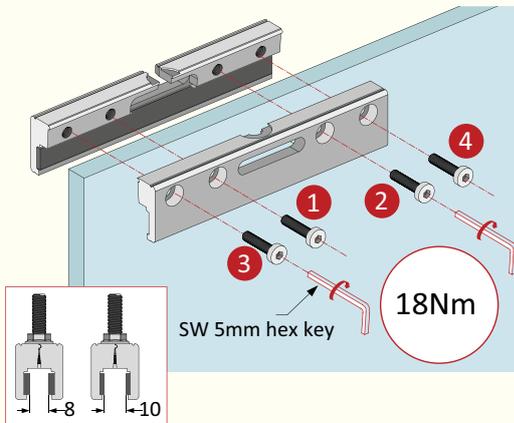


Door Widths

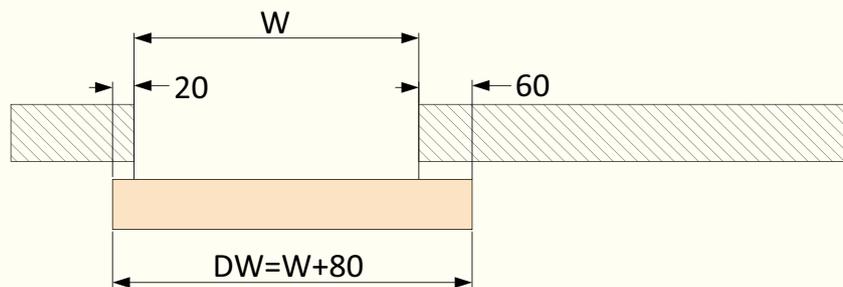

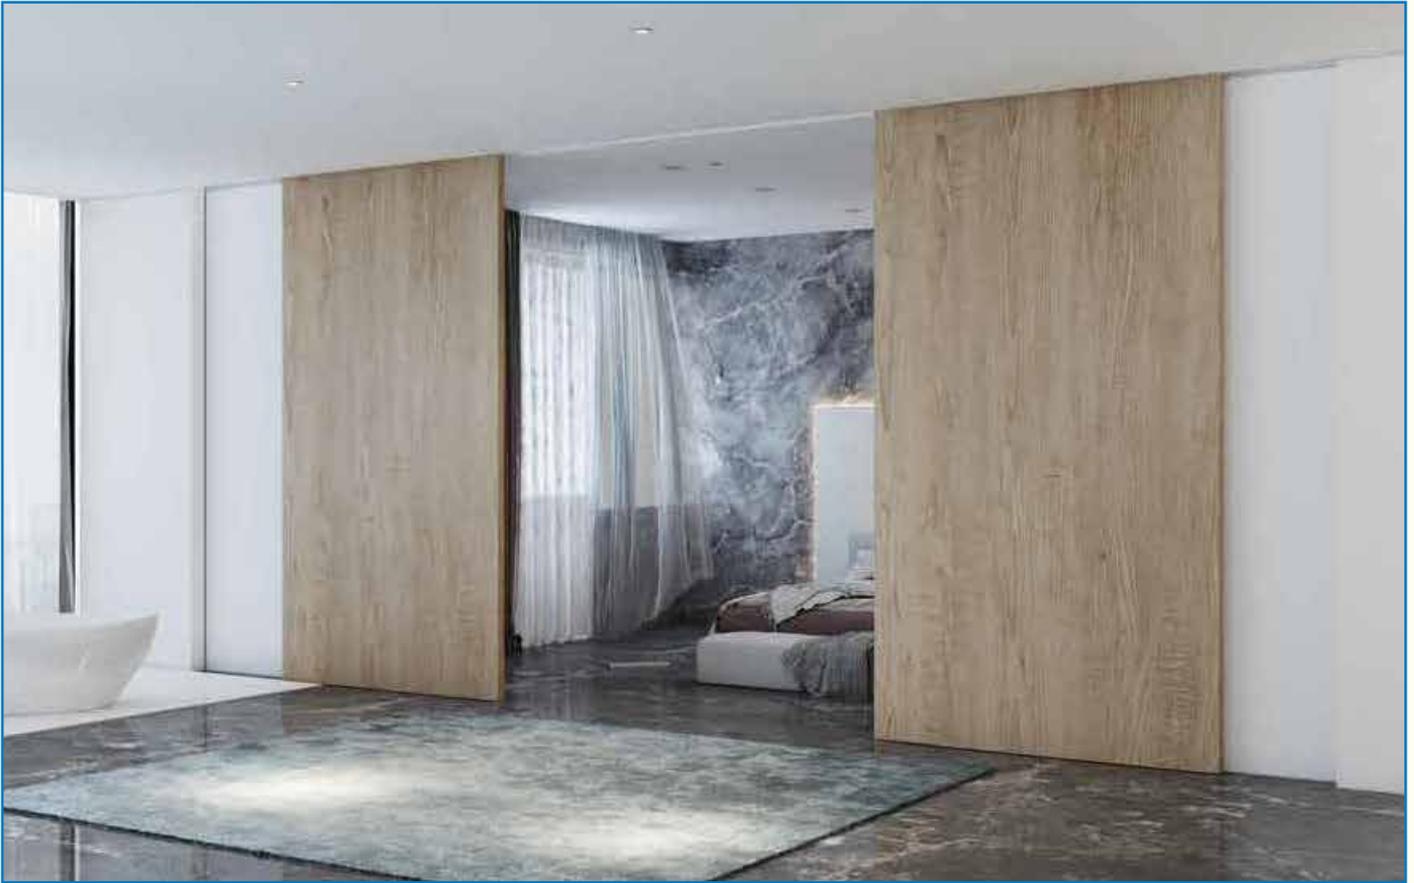

Spacship 80 Synchro Wood Door Ceiling Mounted

- Door Weight capacity ≤ 50 kg
- Soft closing
- Door widths ≥ 580 mm
- Door thickness 35 - 45 mm
- Height adjustable ± 3 mm
- 2 x 2050 mm track
- Easy Assembly and adjustment



Spacship 80 SYNCHRO Wood Door Ceiling Mounted


	Wood Door Ceiling Mounting
Art. No.	OSPA80WSMK20
Max Weight	≤ 50 kg
Door widths	≥ 580 mm
Track Length	2050 mm
Door Thickness	35 - 45 mm

Optional Extension Tracks


Art. No	Description
OSPA80URTS	Upper Running track 2050 mm
OSPA80CB100	Connecting bracket to join 2 upper running tracks 100 mm
OSPA80WGT12	Lower guide track for wooden doors 1250 mm

Synchronised Wood Doors Ceiling Mounted



Dimensions

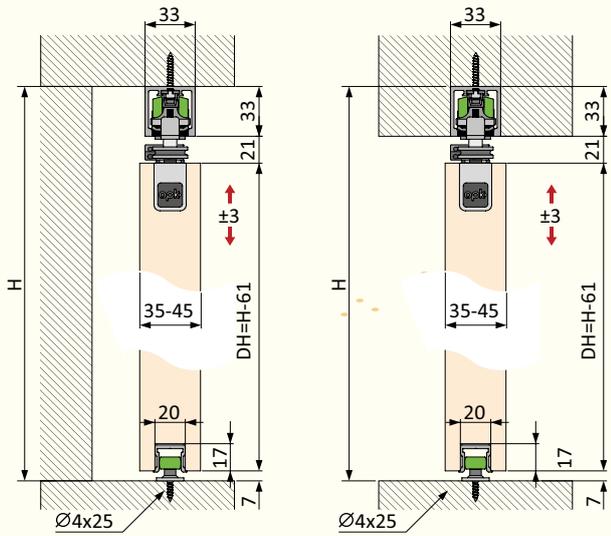


Track Dimensions

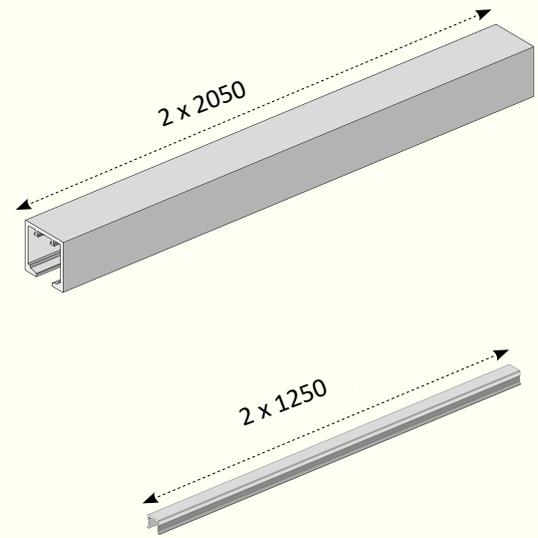

Door Processing

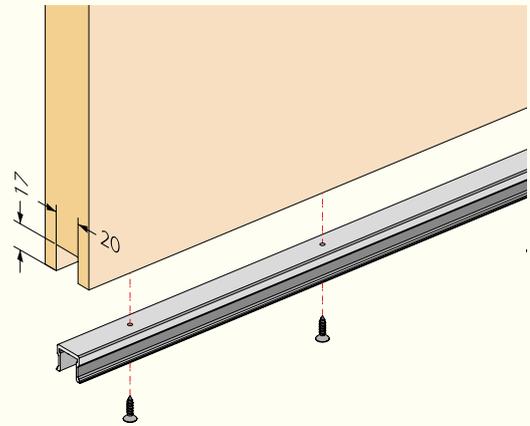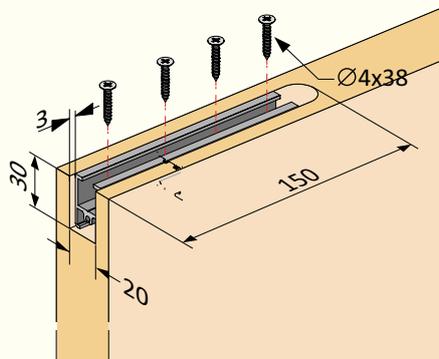


Door Widths

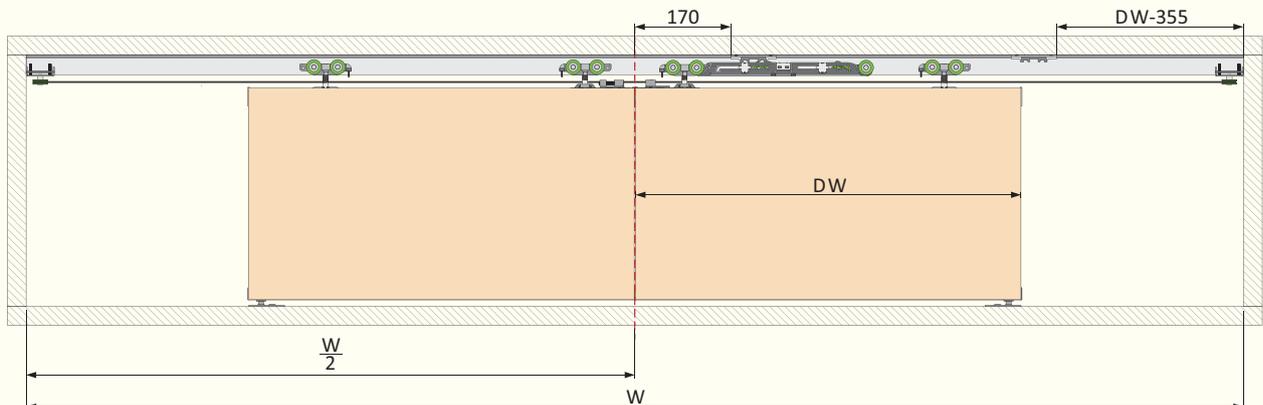



Spacship160 Minimal Top Mounted

- Weight capacity of 160 kg
- Soft closing and opening
- Door widths ≥ 760 mm
- Door thickness 35 - 50 mm
- Height adjustable ± 3 mm
- 2050 mm track
- Easy Assembly and adjustment




Spacship 160 Minimal Top Mounted

	Minimal Ceiling / Top Mounting Door
Art. No.	OSPA160WTMK20
Max Weight	160 kg
Door widths	≥ 760 mm
Track Length	2050 mm
Door Thickness	35 - 45 mm


Optional Extension Tracks

Art. No	Description
OSPA160URT20	160 kg Upper Running track 2050 mm
OSPA80CB100	Connecting bracket to join 2 upper running tracks 100 mm
OSPA80WGT12	Lower guide track for wooden doors 1250 mm



Dimensions

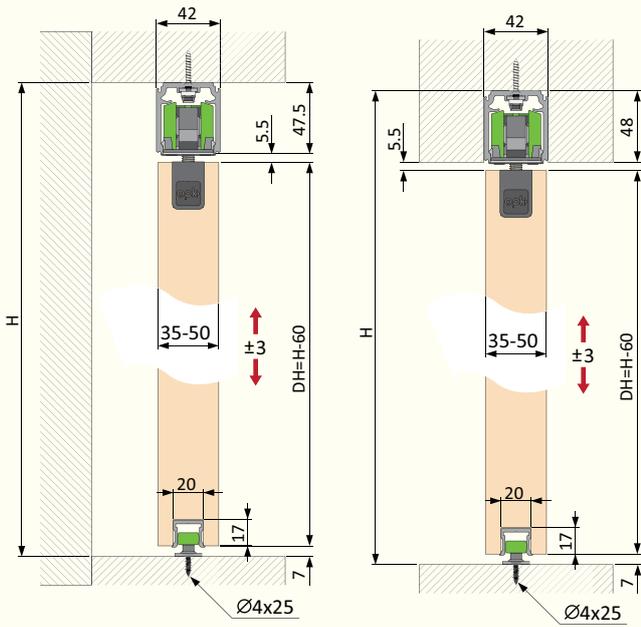


Track Dimensions

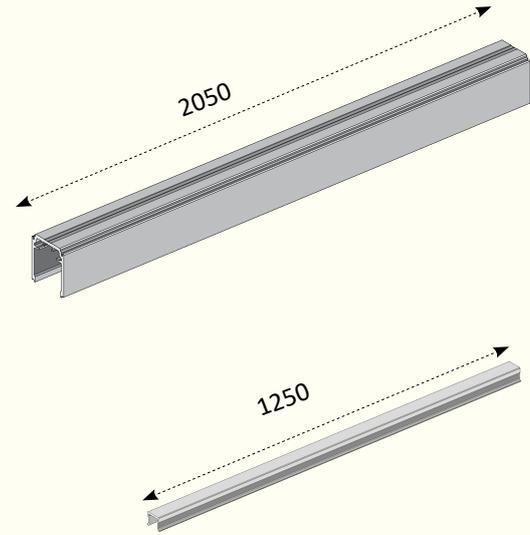

Door Processing

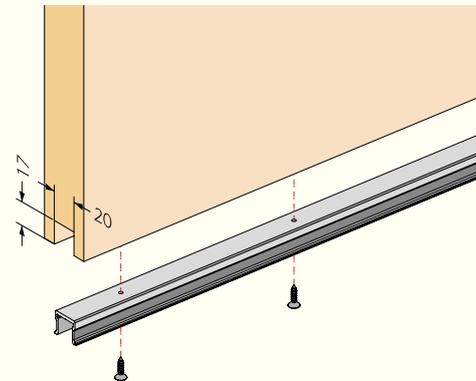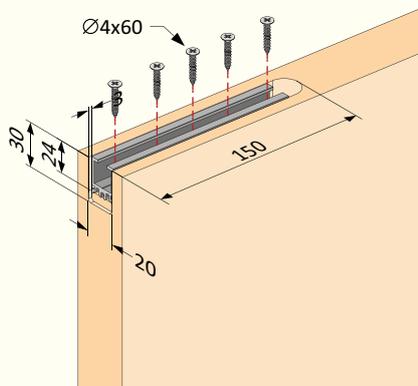

Door Widths

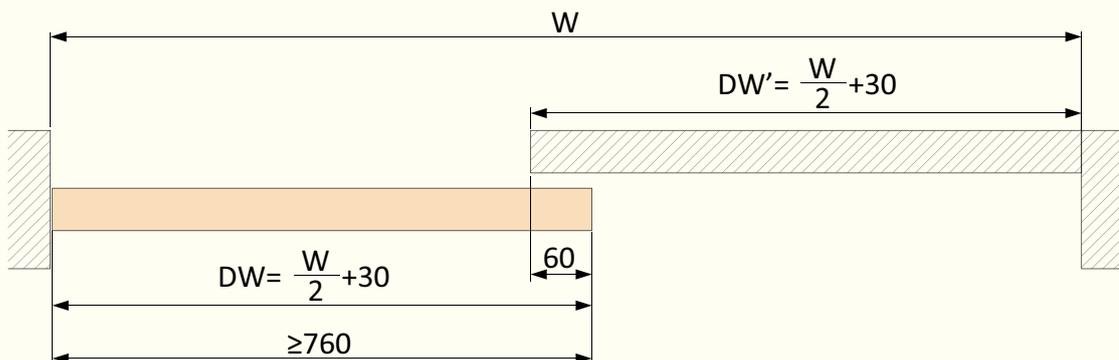



Navigator W3 Wall Mounted


- Weight capacity of 80 kg
- Soft closing and opening
- Door widths ≥ 600 mm
- Door thickness 35 -45 mm
- 2500 mm track
- Easy Assembly and adjustment




Navigator W3 Wall Mounted

	Wall Mounting Door
Art. No.	ONAV80W3K25
Max Weight	80 kg
Door widths	≥ 600 mm
Track Length	2500 mm
Door Thickness	35 - 45 mm



Dimensions

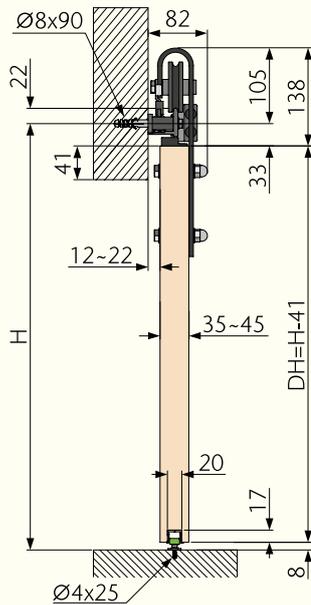


Track Dimensions

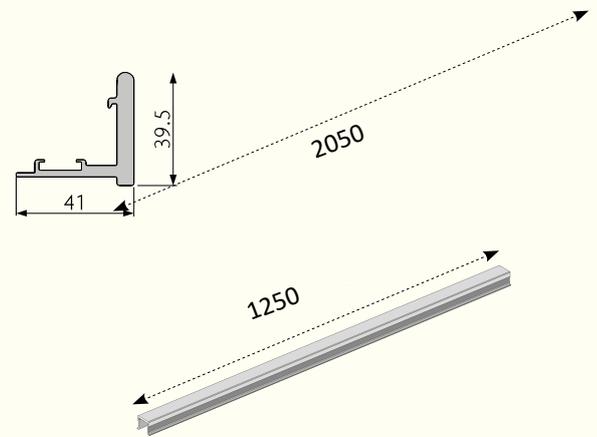

Door Processing

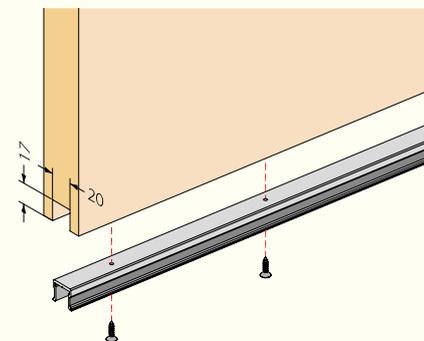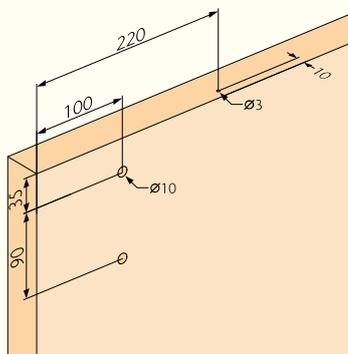

Door Widths

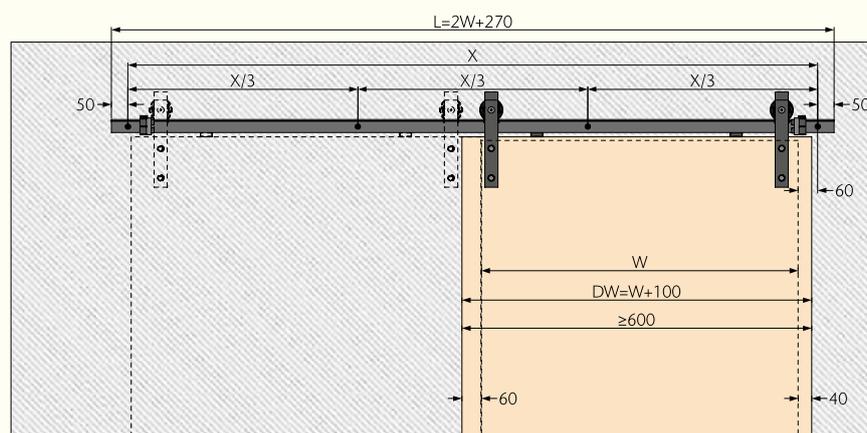



To view our full range of products visit our showroom and advisory centre,
simply contact us to make an appointment



Flanagan Fittings
Falcon House
Dublin Airport Logistics Park
St. Margarets
Co. Dublin
K67 F303
Ireland.

Telephone
+353 (0)1 844 8400

Fax
+353 (0)1 844 8009

E-mail
sales@fff.ie

Web
www.fff.ie

 Find us on
Facebook FlanaganFittings

 @flananganfits

 FlanaganFittings

 FlanaganFittings

