



TANDEMBOX SPACE TOWER Solutions

- Complete set of components to manufacture a Blum Larder or Pantry Unit
- Includes 4 pieces of ZERO protrusion hinge
- Larder Units in 400, 500 and 600 mm cabinets widths c/w 5 C-height drawers
- Pantry units in 800 & 1000 mm cabinet widths c/w 1 M-height inner drawer, 2 C-height drawers 30 kg & 2 C-height drawers 65 kg
- Steel backs for all white aluminium drawers
- Antaro inner fronts in White Aluminium and Orion Grey
- Min. internal carcass depth 503 mm

TANDEMBOX SPACE TOWER UNITS

 	Cabinet Width	Antaro White Aluminium	Antaro Orion Grey	P.U
	400 mm	BPA400C	BPI400D	1 set
	500 mm	BPA500C	BPI500D	1 set
	600 mm	BPA600C	BPI600D	1 set
		5 x C-Height drawers	5 x D-Height drawers	


 	Cabinet Width	Antaro White Aluminium / Glass	Antaro Orion Grey / Glass	P.U
	400 mm	BPA400CG	BPI400DG	1 set
	500 mm	BPA500CG	BPI500DG	1 set
	600 mm	BPA600CG	BPI600DG	1 set
		5 x C-Height drawers	5 x D-Height drawers	

TANDEMBOX ANTARO PANTRY UNIT

 	Cabinet Width	Antaro White Aluminium	Antaro Orion Grey	P.U
	800 mm	BPA800C	BPI800D	1 set
	1000 mm	BPA1000C	BPI1000D	1 set
		4xC + 1xM High drawers	4xD + 1xM High drawers	


 	Cabinet Width	Antaro White Aluminium / Glass	Antaro Orion Grey / Glass	P.U
	800 mm	BPA800CG	BPI800DG	1 set
	1000 mm	BPA1000CG	BPI1000DG	1 set
		4xC + 1xM High drawers	4xD + 1xM High drawers	

Blum MOVENTO with BLUMOTION

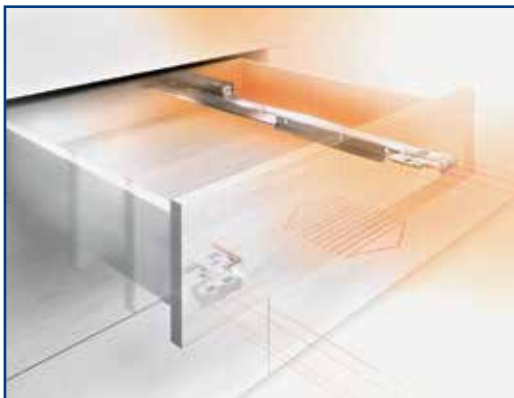


- Concealed, guided, full extension
- Integrated BLUMOTION soft close
- Low opening force to optimise running action
- 4 dimensional tool-free adjustment
- Synchronised smooth running action
- Unparalleled running action for the lifetime of the furniture
- 40kg weight carrying capacity 270 - 600 mm
- 60kg weight carrying capacity 450 - 750 mm

Space Requirement

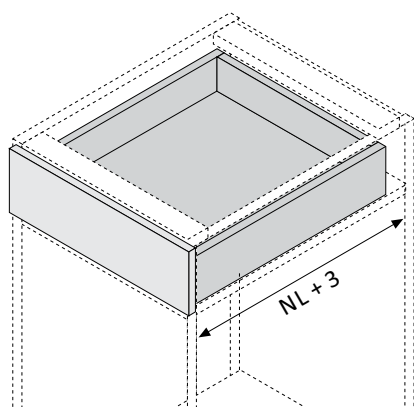


Components

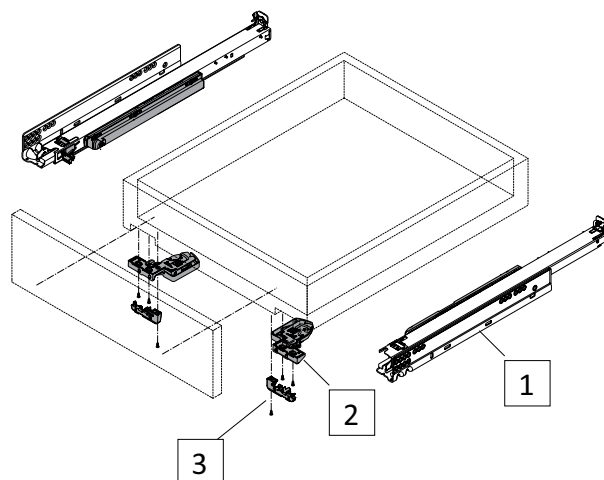


1. Runners
2. Locking Device
3. Depth adjuster (Optional)

Height Requirement

* If runners are fitted prior to cabinet assembly increase height by 1 mm to allow for tolerances

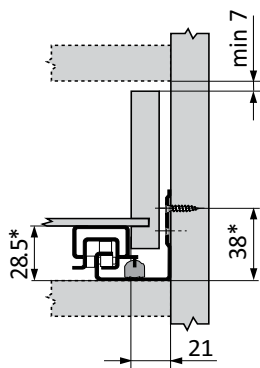


IDW = Internal drawer width
ICW = Inner cabinet width



DL = Drawer Length
NL = Nominal Length

* + an extra 12 mm if side stabiliser is used



IDL= Inner Drawer Length


DL = Drawer Length

NL = Nominal Length

X = Drawer Front


* + extra 4 mm TIP-ON

* + extra 3 mm with depth adjustment



Note: For runner positions and further technical information see Page 1.80

MOVENTO Runner Set




1

Runner Length	40 kg	60 Kg	P.U
270 mm	B760H270B		6
350 mm	B760H350B		6
400 mm	B760H400B		6
450 mm	B760H450B	B766H450B	6
500 mm	B760H500B	B766H500B	6
550 mm	B760H550B	B766H550B	6
600 mm	B760H600B 	B766H600B	6
650 mm	-	B766H650B	6
700 mm	-	B766H700B 	6
750 mm	-	B766H750B 	6

MOVENTO Locking Device with Side Adjustment


2



Fixing Method	Left Hand	Right Hand	P.U
Screw On	BT517601L	BT517601R	250

MOVENTO Depth Adjuster (Optional for Internal Drawers)

3



Fixing Method	Art. No.	P.U
Screw On	B2987600	250


MOVENTO Side Stabilisation Kit (Optional)



Drawer Length	Art. No.	P.U
≤ 750 mm	BZS7750MU 	10

For cabinet widths ≤ 1400mm for Cutting to size: Internal cabinet width -295 mm
 Runner length 400 - 750 mm recommended for cabinet widths ≥ 900 mm
 Runner length 270 - 350 mm recommended for cabinet widths ≥ 600 mm

Back fixing bracket for MOVENTO / TANDEM (Optional)



Fixing Method	Art. No.	P.U
Screw On	BT517000.01 	10


For pull out shelves or where no hole is drilled in the back of drawer.
 Used Left and right, reduce the drawer side depth by an additional 10 mm

Pull Out Shelf Lock (Optional) See Page 1.84



Fixing Method	Art. No.	P.U
Screw On	B295H5700	1

Pull Out Shelf Lock Synchronisation Shaft (Optional) See Page 1.84



Fixing Method	Art. No.	P.U
Tool Free	BZST1160W	1/40