DRAWER & RUNNER SYSTEMS

Contents

Blum TANDEMBOX Drawer Systems 1.01

TANDEMBOX Antaro
Drawer Organisation
Blum SERVO-DRIVE

Blum METABOX Drawer Systems 1.53

METABOX Drawer
METAFILE
METABOX Accessories

Concealed Runners 1.61

MOVENTO Runner
TANDEM Runner

Standard Runners 1.73

Bottom Fix Runners
Side Fix Runners

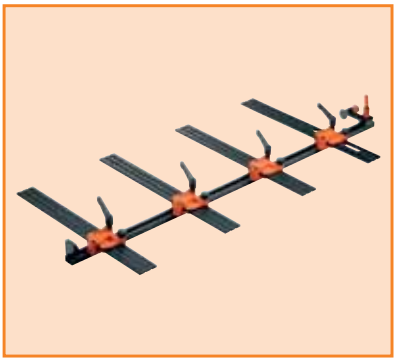

Templates & Jigs 1.75

Drawer Runner Jig
Universal Drilling Jig

Flanagan Fittings

Subject to technical modifications and changes to the range without notice

TANDEMBOX PROGRAM

Subject to technical modifications and changes to the range without notice

TANDEMBOX Contents

The TANDEMBOX cabinet profile is a tried and tested solution; in fact fully loaded pull-outs are tested with 100,000 opening and closing cycles in Blum's test labs to guarantee top standards of quality. Low-friction cylindrical nylon rollers guarantee a feather-light glide and dynamic carrying capacities of 30 kg, and 65 kg. BLUMOTION ensures that drawers and pull-outs close softly and effortlessly. TANDEMBOX is a versatile program offering a range of design possibilities.

N



Shallow Drawer

Page 1.03

M



Standard Drawer

Page 1.04

Inner Fronts

Page 1.17

SPACE-CORNER

Page 1.20

C



Pot Drawer

Page 1.06

Design Element

Page 1.08

Inner Fronts

Page 1.17

SPACE-CORNER

Page 1.20

Sink Drawer

Page 1.21

D



Pot Drawer

Page 1.10

Design Element

Page 1.12

BOXSIDE

Page 1.14

Inner Fronts

Page 1.17

Applications

SERVO-DRIVE

Page 1.23

TIP-ON

Page 1.29

Larder Units

Page 1.18

Applications

ORGA-LINE

Page 1.42

Accessory Kit

Page 1.45

Divider Kits

Page 1.48

Flanagan Fittings

Subject to technical modifications and changes to the range without notice

Blum TANDEMBOX A profile Shallow drawer

TANDEMBOX A Profile Shallow drawer

- Concealed, guided, full extension
- Integrated BLUMOTION soft close
- Drawer side height N = 68.5 mm
- Front height ≥ 100 mm (Bottom drawer 18 mm overlay)
- Unparalleled running action for the lifetime of the furniture
- White Aluminium or Stainless Steel finish
- 30kg weight carrying capacity
- Tool free assembly option
- 2 dimensional front adjustment



Space Requirement

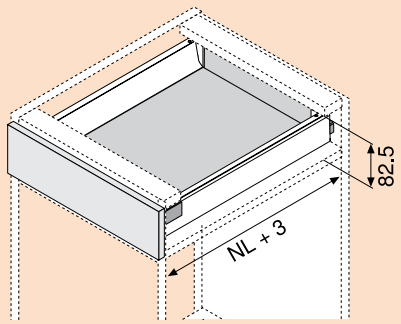

Components

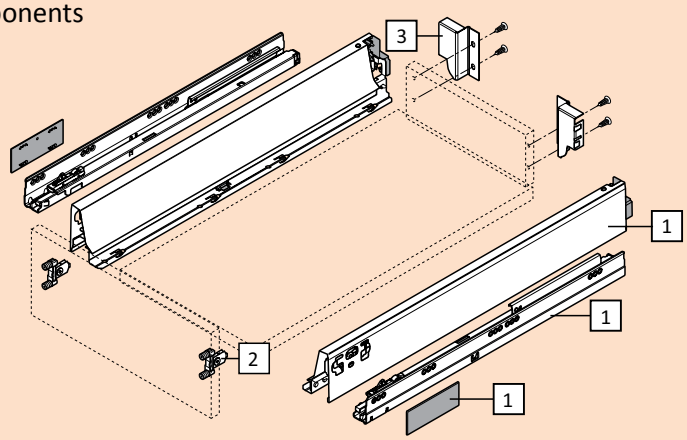

Height Requirement



Installation for screw on front-fixing bracket



Front drilling for INSERTA front-fixing brackets



Back installation dimensions



Drawer Sides Runners & Cover Caps - 30 kg



1

Nominal Length	White Aluminium	P.U	Inox	P.U
500 mm	B358N500A	1/6	B358N500AI	1/6

Front-fixing brackets



2

Front Brackets	Screw On	P.U	INSERTA	P.U
(2 Pcs Required)	BZSF3502	500	BZSF3902	500

Back Brackets for Wooden backs



3

	White Aluminium	P.U	Inox	P.U
Back set	BZ30N000SET	1	BZ30N000SETI	1

Subject to technical modifications and changes to the range without notice

Flanagan Fittings

Blum TANDEMBOX Antaro

TANDEMBOX A Standard height drawer

- Concealed, guided, full extension
- Integrated BLUMOTION soft close
- Drawer side height M = 83.6 mm
- Front height ≥ 115 mm (Bottom drawer 18 mm overlay)
- Unparalleled running action for the lifetime of the furniture
- White Aluminium or Stainless Steel Finishes
- 30 kg weight carrying capacity 270 - 500 mm
- 65 kg weight carrying capacity 450 - 650 mm
- Tool free assembly option
- 2 dimensional front adjustment



Space Requirement

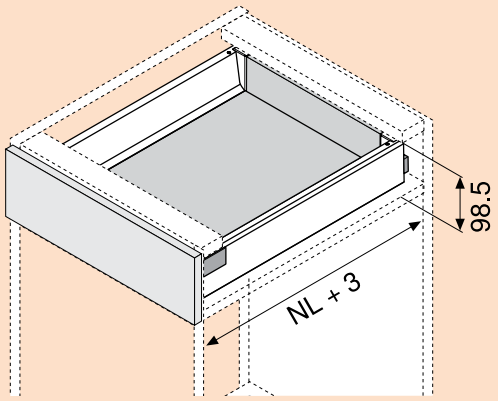

Components

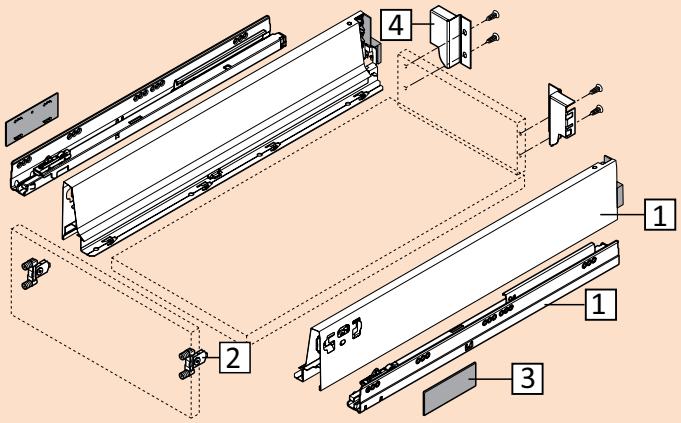

1. Runners and Sides
2. Front-fixing brackets
3. Cover caps
4. Back brackets

Height Requirement

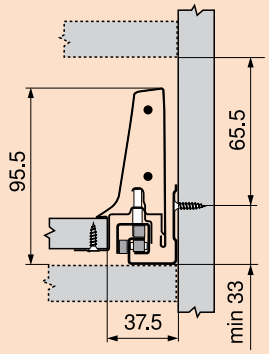

Installation for screw on front-fixing bracket



Front drilling for INSERTA front-fixing brackets



Back installation dimensions



Note: For runner positions and base and back cutting dimensions see Page 1.36

Flanagan Fittings

Subject to technical modifications and changes to the range without notice

Blum TANDEMBOX Antaro Standard Drawer

Drawer Sides and Runners - 30 kg



1

Nominal Length	White Aluminium	P.U	Inox	P.U
270 mm	B358M270A	20	B358M270AI	6
350 mm	B358M350A	20	B358M350AI	6
400 mm	B358M400A	20	B358M400AI	6
450 mm	B358M450A	20	B358M450AI	6
500 mm	B358M500A	20	B358M500AI	6

Drawer Sides and Runners - 65 kg



1

Nominal Length	White Aluminium	P.U	Inox	P.U
450 mm	B356M450A	20	B356M450AI	6
500 mm	B356M500A	20	B356M500AI	6
550 mm	B356M550A	20	B356M550AI	6
650 mm	B356M650A	20	B356M650AI	6

Front-fixing brackets



2

Front Brackets	Screw On	P.U	INSERTA	P.U
(2 Pcs Required)	BZSF3502	500	BZSF3902	500

Cover Caps



3

Cover Cap	Plain Cover Cap	P.U	Cap with Logo	P.U
(2 Pcs Required)	BZAA532C	1000	BZAA532CL	1000

Back Brackets for Wooden Backs



4

	White Aluminium	P.U	Inox	P.U
Left Bracket	BZ30M000L	50	BZ30M000LI	50
Right Bracket	BZ30M000R	50	BZ30M000RI	50
Steel Backs	Page 1.16		-	

Subject to technical modifications and changes to the range without notice

Flanagan Fittings

Blum TANDEMBOX Antaro C Height

TANDEMBOX Antaro C height Pot drawer

- Concealed, guided, full extension
- Integrated BLUMOTION soft close
- Front height ≥ 205 mm (Bottom drawer 18 mm overlay)
- Unparalleled running action for the lifetime of the furniture
- White Aluminium or Stainless Steel Finishes
- 30 kg weight carrying capacity 270 - 500 mm
- 65 kg weight carrying capacity 450 - 650 mm
- Tool free assembly option
- 3 dimensional front adjustment



Space Requirement

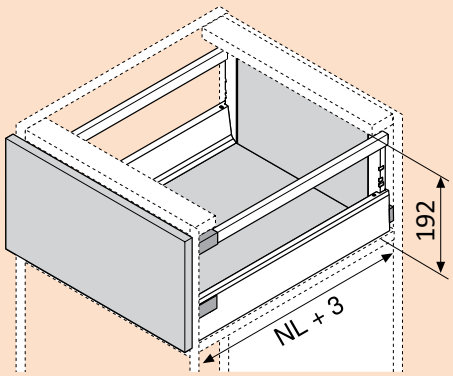

Components

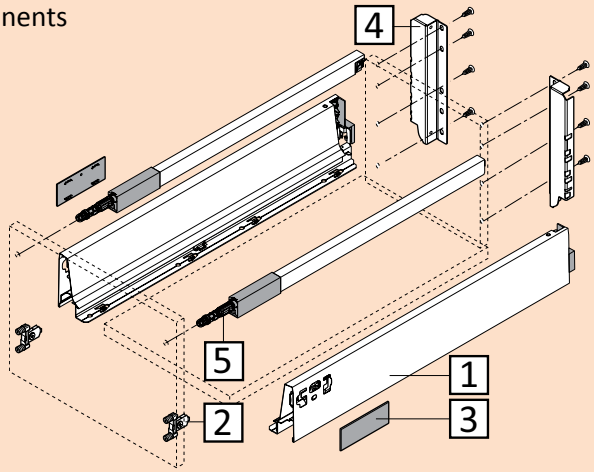

1. Runners and Sides
2. Front-fixing brackets
3. Cover caps
4. Back brackets
5. Gallery Rails

Height Requirement

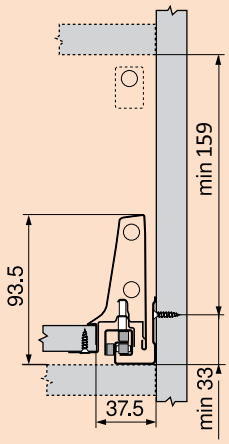

Installation for screw on front-fixing bracket

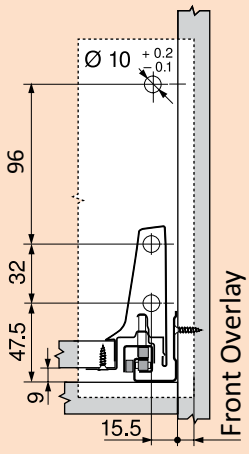

Front drilling for INSERTA front-fixing brackets

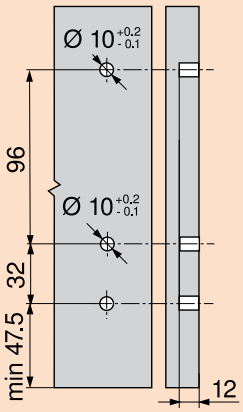

Back installation dimensions

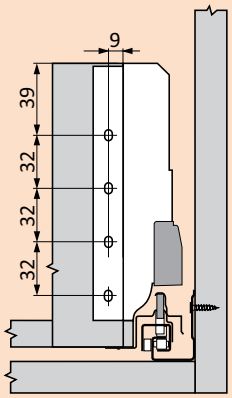

Note: For runner positions and base and back cutting dimensions see Page 1.36

Flanagan Fittings

Subject to technical modifications and changes to the range without notice

Blum TANDEMBOX Antaro C Height

Drawer Sides and Runners - 30 kg



1

Nominal Length	White Aluminium	P.U	Inox	P.U
350 mm	B358M350A	20	B358M350AI	6
400 mm	B358M400A	20	B358M400AI	6
450 mm	B358M450A	20	B358M450AI	6
500 mm	B358M500A	20	B358M500AI	6

Drawer Sides and Runners - 65 kg



1

Nominal Length	White Aluminium	P.U	Inox	P.U
450 mm	B356M450A	20	B356M450AI	6
500 mm	B356M500A	20	B356M500AI	6
550 mm	B356M550A	20	B356M550AI	6
650 mm	B356M650A	20	B356M650AI	6

Front-fixing brackets



2

Front Brackets	Screw On	P.U	INSERTA	P.U
(2 Pcs Required)	BZSF3502	500	BZSF3902	500

Cover Caps



3

Cover Cap	Plain Cover Cap	P.U	Cap with Logo	P.U
(2 Pcs Required)	BZAA532C	1000	BZAA532CL	1000

C Height Back Brackets for Wooden Backs



4

	White Aluminium	P.U	Inox	P.U
Left Bracket	BZ30C000L	50	BZ30C000LI	50
Right Bracket	BZ30C000R	50	BZ30C000RI	50
Steel Backs	See page 1.16		-	

Antaro INSERTA Gallery Rails

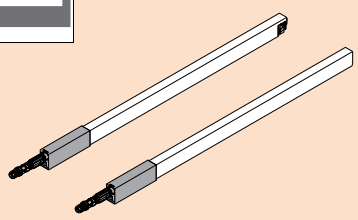

5 Screw On Galleries see page 1.22

Nominal Length	White Aluminium	P.U	Inox	P.U
350 mm	BZRG287	100	BZRG287I	16
400 mm	BZRG337	100	BZRG337I	16
450 mm	BZRG387	100	BZRG387I	16
500 mm	BZRG437	100	BZRG437I	16
550 mm	BZRG487	100	BZRG487I	16
650 mm	BZRG587	100	BZRG587I	16

Round INSERTA Gallery Rails



5

	White Aluminium	P.U	Inox	P.U
450 mm	BZRG396	100	-	-
500 mm	BZRG446	100	BZRG446I	100

Subject to technical modifications and changes to the range without notice

Flanagan Fittings

Blum TANDEMBOX Antaro C Height Design Element

TANDEMBOX Antaro C height Drawer Design Element

- Concealed, guided, full extension
- Integrated BLUMOTION soft close
- Front height ≥ 205 mm (Bottom drawer 18 mm overlay)
- Unparalleled running action for the lifetime of the furniture
- White Aluminium or Stainless Steel Finishes
- 30kg weight carrying capacity 270 - 500 mm
- 65kg weight carrying capacity 450 - 650 mm
- Tool free assembly option
- 3 dimensional front adjustment



Space Requirement

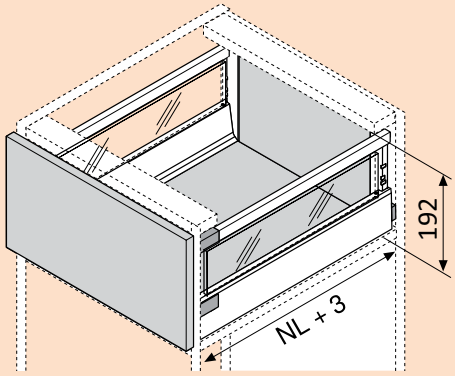

Components

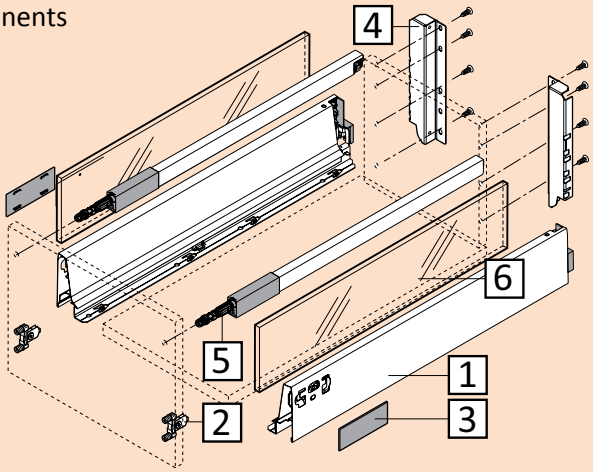

1.	Runners and Sides	4.	Back brackets
2.	Front-fixing brackets	5.	Gallery Rails
3.	Cover caps	6.	Design Element

Height Requirement

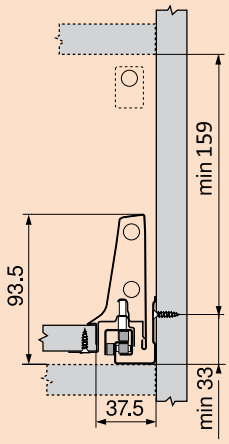

Installation for screw on front-fixing bracket

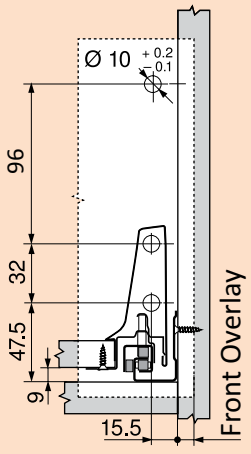

Front drilling for INSERTA front-fixing brackets

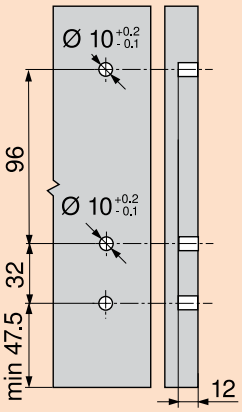

Back installation dimensions

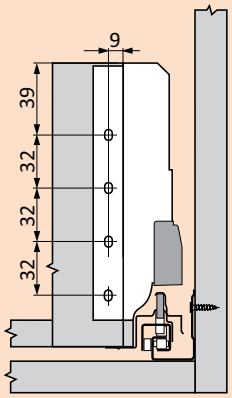

Note: For runner positions and base and back cutting dimensions see Page 1.36

Flanagan Fittings

Subject to technical modifications and changes to the range without notice

Blum TANDEMBOX Antaro C Height Design Element

Drawer Sides and Runners - 30 kg



1

Nominal Length	White Aluminium	P.U	Inox	P.U
450 mm	B358M450A	20	B358M450AI	6
500 mm	B358M500A	20	B358M500AI	6

Drawer Sides and Runners - 65 kg



1

Nominal Length	White Aluminium	P.U	Inox	P.U
450 mm	B356M450A	20	B356M450AI	6
500 mm	B356M500A	20	B356M500AI	6

Front-fixing brackets



2

Front Brackets	Screw On	P.U	INSERTA	P.U
(2 Pcs Required)	BZSF3502	500	BZSF3902	500

Cover Caps



3

Cover Cap	Plain Cover Cap	P.U	Cap with Logo	P.U
(2 Pcs Required)	BZAA532C	1000	BZAA532CL	1000

C Height Back Brackets for Wooden Backs



4

	White Aluminium	P.U	Inox	P.U
Left Bracket	BZ30C000L	50	BZ30C000LI	50
Right Bracket	BZ30C000R	50	BZ30C000RI	50
Steel Backs	See page 1.16		-	

Antaro INSERTA Gallery Rails



5

Nominal Length	White Aluminium	P.U	Inox	P.U
450 mm	BZRG387	100	BZRG387I	16
500 mm	BZRG437	100	BZRG437I	1

Screw On Galleries See Page 1.22

Antaro C-Height Design Element including fixing materials



6

Drawer Finish	Design Element	450 mm	P.U	500 mm	P.U
White Aluminium	W-Alu Metal	B37C45	10	B37C50	10
	Clear Glass	B37C45C	10	B37C50C	10
	Satin Glass	B37C45S	10	B37C50S	10
INOX	Clear Glass	B37C45CI	10	B37C50CI	10
	Satin Glass	B37C45SI	10	B37C50SI	10

Other sizes available by special order

Subject to technical modifications and changes to the range without notice

Flanagan Fittings

Blum TANDEMBOX Antaro D Height

TANDEMBOX Antaro D height Pot drawer

- Concealed, guided, full extension
- Integrated BLUMOTION soft close
- Front height ≥ 237 mm (Bottom drawer 18 mm overlay)
- Unparalleled running action for the lifetime of the furniture
- White Aluminium or Stainless Steel Finishes
- 30 kg weight carrying capacity 350 - 500 mm
- 65 kg weight carrying capacity 450 - 650 mm
- Tool free assembly option
- 3 dimensional front adjustment



Space Requirement

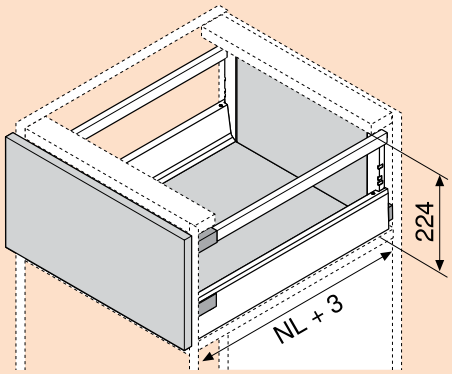

Components

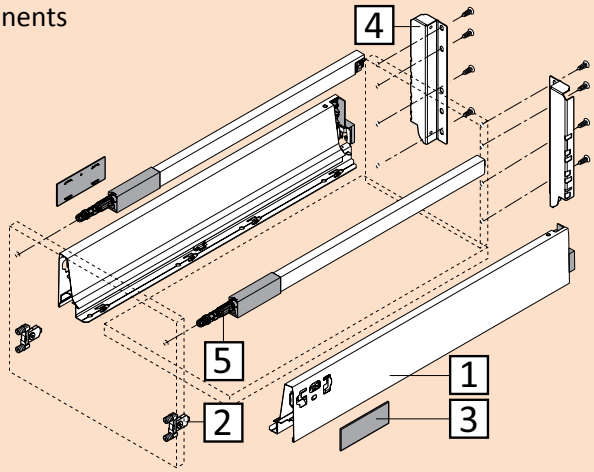

1. Runners and Sides
2. Front-fixing brackets
3. Cover caps
4. Back brackets
5. Gallery Rails

Height Requirement

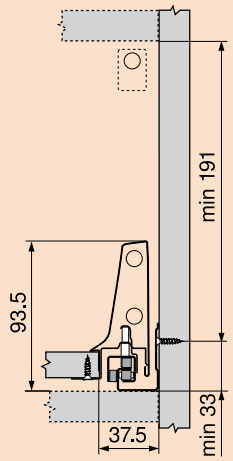

Installation for screw on front-fixing bracket

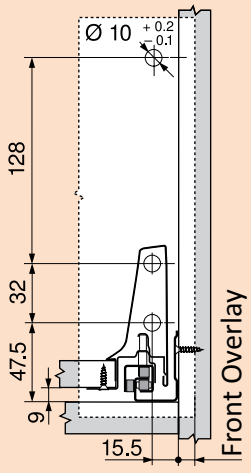

Front drilling for INSERTA front-fixing brackets

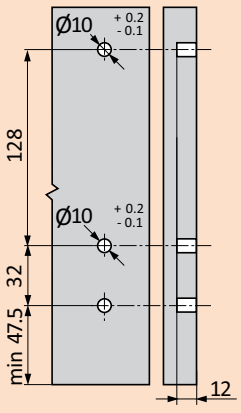

Back installation dimensions

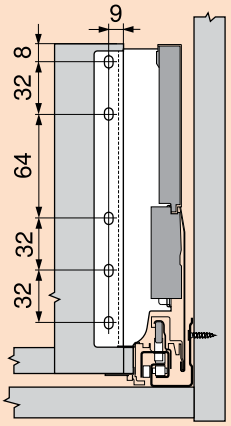

Note: For runner positions and base and back cutting dimensions see Page 1.36

Flanagan Fittings

Subject to technical modifications and changes to the range without notice

Blum TANDEMBOX Antaro D Height

Drawer Sides and Runners - 30 kg



1

Nominal Length	White Aluminium	P.U	Inox	P.U
350 mm	B358M350A	20	B358M350AI	6
400 mm	B358M400A	20	B358M400AI	6
450 mm	B358M450A	20	B358M450AI	6
500 mm	B358M500A	20	B358M500AI	6

Drawer Sides and Runners - 65 kg



1

Nominal Length	White Aluminium	P.U	Inox	P.U
450 mm	B356M450A	20	B356M450AI	6
500 mm	B356M500A	20	B356M500AI	6
550 mm	B356M550A	20	B356M550AI	6
650 mm	B356M650A	20	B356M650AI	6

Front-fixing brackets



2

Front Brackets	Screw On	P.U	INSERTA	P.U
(2 Pcs Required)	BZSF3502	500	BZSF3902	500

Cover Caps



3

Cover Cap	Plain Cover Cap	P.U	Cap with Logo	P.U
(2 Pcs Required)	BZAA532C	1000	BZAA532CL	1000

D Height Back Brackets for Wooden Backs



4

	White Aluminium	P.U	Inox	P.U
Left Bracket	BZ30D000L	50	BZ30D000LI	50
Right Bracket	BZ30D000R	50	BZ30D000RI	50
Steel Backs	See page 1.16		-	

Antaro INSERTA Gallery Rails

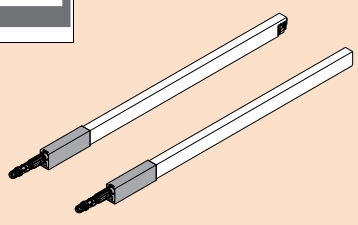

5 Screw On Galleries see page 1.22

Nominal Length	White Aluminium	P.U	Inox	P.U
350 mm	BZRG287	100	BZRG287I	16
400 mm	BZRG337	100	BZRG337I	16
450 mm	BZRG387	100	BZRG387I	16
500 mm	BZRG437	100	BZRG437I	16
550 mm	BZRG487	100	BZRG487I	16
650 mm	BZRG587	100	BZRG587I	16

Round INSERTA Gallery Rails



5

	White Aluminium	P.U	Inox	P.U
450 mm	BZRG396	100	-	-
500 mm	BZRG446	100	BZRG446I	100

Subject to technical modifications and changes to the range without notice

Flanagan Fittings

Blum TANDEMBOX Antaro D Height Design Element

TANDEMBOX Antaro D height Pot - Design Element

- Concealed, guided, full extension
- Integrated BLUMOTION soft close
- Front height ≥ 237 mm (Bottom drawer 18 mm overlay)
- Unparalleled running action for the lifetime of the furniture
- White Aluminium or Stainless Steel Finishes
- 30 kg weight carrying capacity 350 - 500 mm
- 65 kg weight carrying capacity 450 - 650 mm
- Tool free assembly option
- 3 dimensional front adjustment



Space Requirement

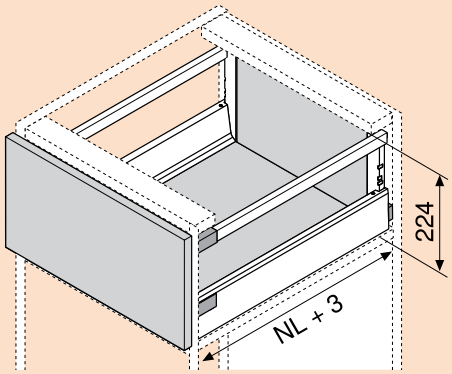

Components

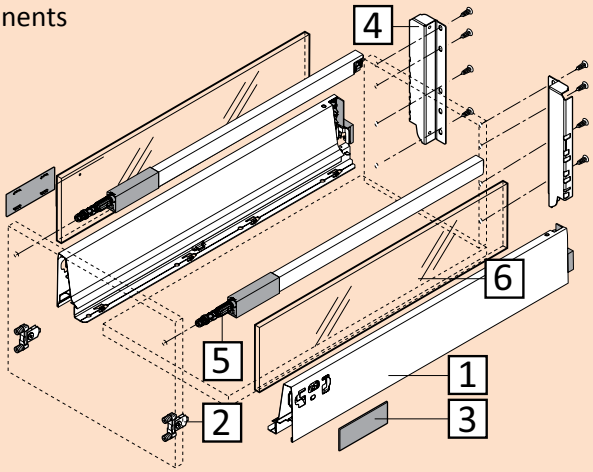

1.	Runners and Sides	4.	Back brackets
2.	Front-fixing brackets	5.	Gallery Rails
3.	Cover caps	6.	Design Element

Height Requirement

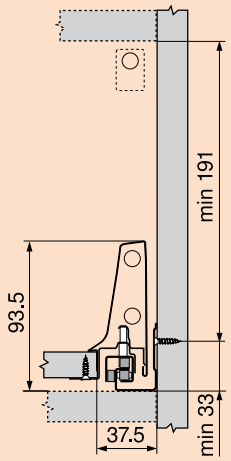

Installation for screw on front-fixing bracket

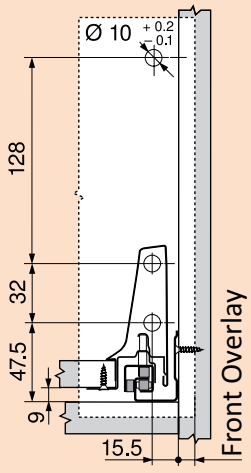

Front drilling for INSERTA front-fixing brackets

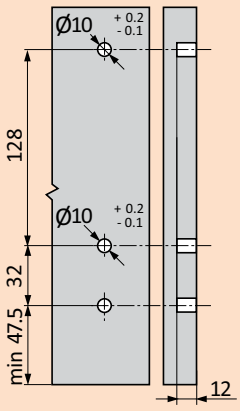

Back installation dimensions

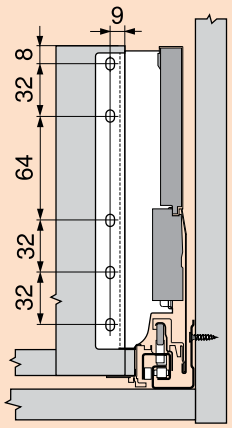

Note: For runner positions and base and back cutting dimensions see Page 1.36

Flanagan Fittings

Subject to technical modifications and changes to the range without notice

Blum TANDEMBOX Antaro D Height Design Element

Drawer Sides and Runners - 30 kg



1

Nominal Length	White Aluminium	P.U	Inox	P.U
450 mm	B358M450A	20	B358M450AI	6
500 mm	B358M500A	20	B358M500AI	6

Drawer Sides and Runners - 65 kg



1

Nominal Length	White Aluminium	P.U	Inox	P.U
450 mm	B356M450A	20	B356M450AI	6
500 mm	B356M500A	20	B356M500AI	6

Front-fixing brackets



2

Front Brackets	Screw On	P.U	INSERTA	P.U
(2 Pcs Required)	BZSF3502	500	BZSF3902	500

Cover Caps



3

Cover Cap	Plain Cover Cap	P.U	Cap with Logo	P.U
(2 Pcs Required)	BZAA532C	1000	BZAA532CL	1000

D-Height Back Brackets for Wooden Backs



4

	White Aluminium	P.U	Inox	P.U
Left Bracket	BZ30D000L	50	BZ30D000LI	50
Right Bracket	BZ30D000R	50	BZ30D000RI	50
Steel Backs	See page 1.16		-	

Antaro INSERTA Gallery Rails



5

Nominal Length	White Aluminium	P.U	Inox	P.U
450 mm	BZRG387	100	BZRG387I	16
500 mm	BZRG437	100	BZRG437I	16

Screw On Galleries See Page 1.22

Antaro D-Height Design Element including fixing materials



6

Drawer Finish	Design Element	450 mm	P.U	500 mm	P.U
White Aluminium	W-Alu Metal	B37D45	10	B37D50	10
	Clear Glass	B37D45C	10	B37D50C	10
	Satin Glass	B37D45S	10	B37D50S	10
INOX	Clear Glass	B37D45CI	10	B37D50CI	10
	Satin Glass	B37D45SI	10	B37D50SI	10

Other sizes available by special order

Subject to technical modifications and changes to the range without notice

Flanagan Fittings

TANDEMBOX A profile with BOXSIDE

TANDEMBOX A profile with BOXSIDE

- Concealed, guided, full extension
- Integrated BLUMOTION soft close
- Front height ≥ 237 mm (Bottom drawer 18 mm overlay)
- Unparalleled running action for the lifetime of the furniture
- White Aluminium or Stainless Steel Finishes
- 30 kg weight carrying capacity 450 - 500 mm
- 65 kg weight carrying capacity 450 - 500 mm
- Tool free assembly option
- 3 dimensional front adjustment



Space Requirement

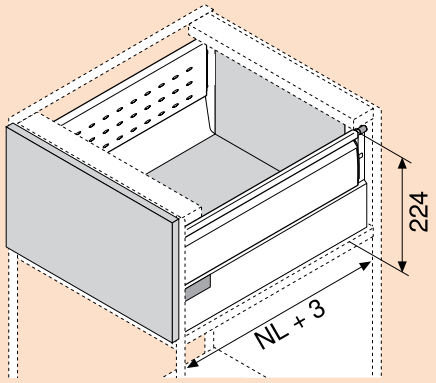

Components

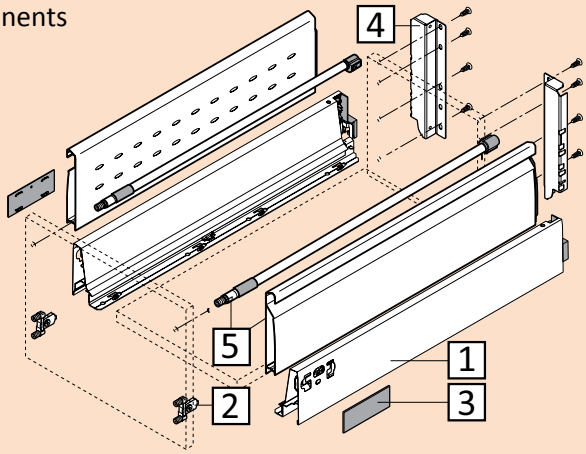

1. Runners and Sides
2. Front-fixing brackets
3. Cover caps
4. Back brackets
5. BOXSIDE & Gallery Rails

Height Requirement

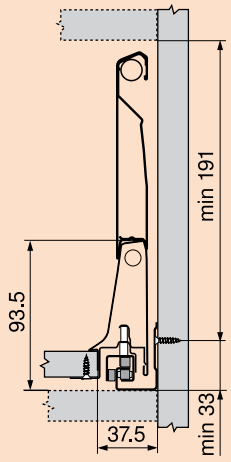

Installation for screw on front-fixing bracket

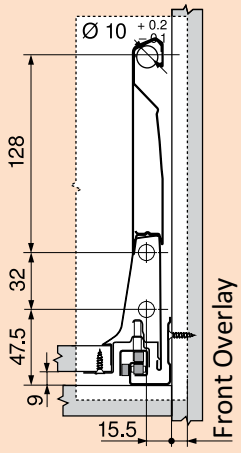

Front drilling for INSERTA front-fixing brackets

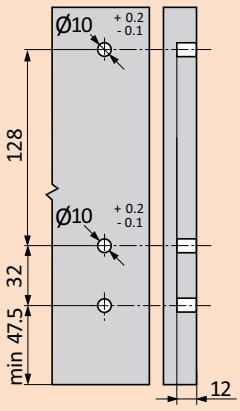

Back installation dimensions

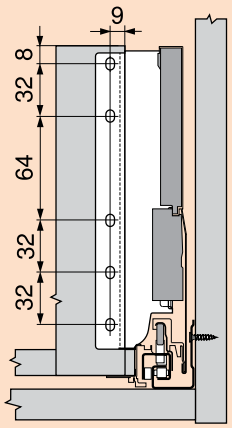

Note: For runner positions and base and back cutting dimensions see Page 1.36

Flanagan Fittings

Subject to technical modifications and changes to the range without notice

TANDEMBOX A profile with BOXSIDE

Drawer Sides and Runners - 30 kg



1

Nominal Length	White Aluminium	P.U	Inox	P.U
450 mm	B358M450A	20	B358M450AI	6
500 mm	B358M500A	20	B358M500AI	6

Drawer Sides and Runners - 65 kg



1

Nominal Length	White Aluminium	P.U	Inox	P.U
450 mm	B356M450A	20	B356M450AI	6
500 mm	B356M500A	20	B356M500AI	6

Front-fixing brackets



2

Front Brackets	Screw On	P.U	INSERTA	P.U
(2 Pcs Required)	BZSF3502	500	BZSF3902	500

Cover Caps



3

Cover Cap	Plain Cover Cap	P.U	Cap with Logo	P.U
(2 Pcs Required)	BZAA532C	1000	BZAA532CL	1000

D Height Back Brackets for Wooden Backs



4

	White Aluminium	P.U	Inox	P.U
Left Bracket	BZ30D000L	50	BZ30D000LI	50
Right Bracket	BZ30D000R	50	BZ30D000RI	50
Steel Backs	See page 1.16		-	

BOXSIDE c/w Round Gallery Rails



5

	White Aluminium	P.U	Inox	P.U
450 mm	BZ37H418A	9	BZ37H418AI	9
500 mm	BZ37H468A	9	BZ37H468AI	9

Subject to technical modifications and changes to the range without notice

Blum TANDEMBOX Backs and Bases

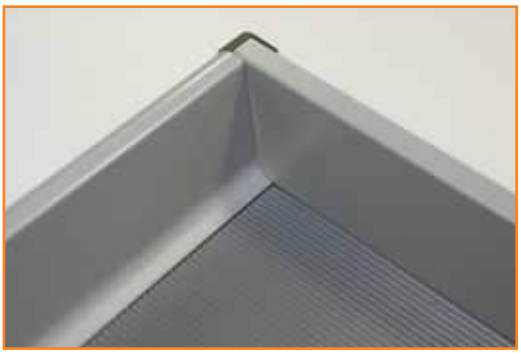

TANDEMBOX Steel Back Program

- Reduces production time spent on timber backs (No need to cut and edge chipboard)
- White Aluminium finish to match drawer sides
- Designed to suit cabinets with 18 mm gables
- Full program available
- Special sizes and finishes on request (Minimum order quantities & lead times apply to special sizes)

Steel Back White Aluminum Finish

Cabinet Width	Standard Drawer	P.U	Pot drawer C	P.U	Pot Drawer D	P.U
300 mm	BZ30M235	40	N/A	-	N/A	-
400 mm	BZ30M335	40	BZ30C335 ☎	15	BZ30D335	15
450 mm	BZ30M386	40	N/A	-	N/A	-
500 mm	BZ30M435	40	BZ30C435 ☎	15	BZ30D435	15
600 mm	BZ30M535	40	BZ30C535 ☎	15	BZ30D535	15
700 mm	BZ30M635	40	N/A	-	BZ30D635	10
800 mm	BZ30M735	20	BZ30C735 ☎	10	BZ30D735	10
900 mm	BZ30M835	20	BZ30C835 ☎	10	BZ30D835	10
1000 mm	BZ30M935	20	BZ30C935 ☎	10	BZ30D935	10

TANDEMBOX Chipboard Base Program

- Reduces production time spent on bases
- Grey finish to match drawer sides
- Designed to suit cabinets with 18 mm gables
- Full program available
- Special sizes and finishes on request (Minimum order quantities & lead times apply to special sizes)

Pre-Cut Chipboard bases 16 mm

Nominal Length	270 mm	450 mm	500 mm	P.U
Cabinet Width				
300 mm	N/A	DB4530	DB5030	1
400 mm	DB2740	DB4540	DB5040	1
450 mm	DB2745	DB4545	DB5045	1
500 mm	DB2750	DB4550	DB5050	1
600 mm	N/A	DB4560	DB5060	1
700 mm	N/A	DB4570	DB5070	1
800 mm	N/A	DB4580	DB5080	1
900 mm	N/A	DB4590	DB5090	1
1000 mm	N/A	DB45100	DB50100	1

Flanagan Fittings

Subject to technical modifications and changes to the range without notice

TANDEMBOX A profile inner fronts

TANDEMBOX A Profile Inner Fronts

- Colour coordinated to match White Aluminium drawer
- A range of pre-assembled M- and C-height fronts
- Cut-to-suit option for INOX or off-standard White Aluminium
- Special sizes and finishes on request (Minimum order quantities & lead times apply to special sizes)

Pre-Cut Inner Drawer Fronts

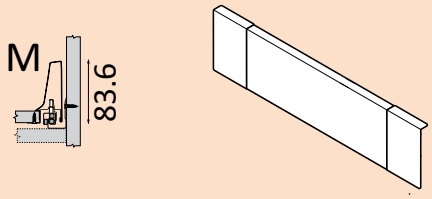

Cabinet Width	White Aluminium	P.U
400 mm	BZIA230M0	30
500 mm	BZIA330M0	30
600 mm	BZIA430M0	30
800 mm	BZIA630M0	30
1000 mm	BZIA830M0	30

Pre-Cut Inner Pot Drawer Fronts

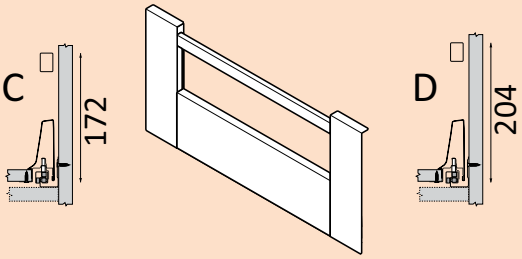

Cabinet Width	C-Height	D-Height	P.U
400 mm	BZIA230C2	BZIA230D2	15
500 mm	BZIA330C2	BZIA330D2	15
600 mm	BZIA430C2	BZIA430D2	15
800 mm	BZIA630C2	BZIA630D2	15
1000 mm	BZIA830C2	BZIA830D2	15

Front Brackets for CUT-TO-SUIT Inner fronts

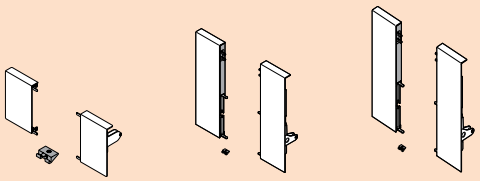

Height	White Aluminium	INOX Drawer	P.U
M	BZIF71M	BZIF71MG	1/12
C	BZIF74C	BZIF74CG	1/12
D	BZIF74D	BZIF74DG	1/12

Front Panel for CUT-TO-SUIT M-, C- and D-Height Drawers



White Aluminium	INOX	P.U
BZ31L1036	BZI31L1036I	12

Cut to size dimensions = Internal Carcase width - 132 mm

Handle Rail for CUT-TO-SUIT C- and D-Height Drawers



White Aluminium	INOX	P.U
BZRG1046Z	BZRG1046ZI	20

Cut to size dimensions = Internal Carcase width - 122 mm

Subject to technical modifications and changes to the range without notice

TANDEMBOX Antaro Larders units

TANDEMBOX Antaro Larder Solutions

- Complete set of components to manufacture a Blum Larder or Pantry Unit
- Includes 4 pieces of ZERO protrusion hinge
- Larder Units in 400, 500 and 600 mm cabinets widths c/w 5 C-height drawers
- Pantry units in 800, 900 & 1000 mm cabinet widths c/w 1 M-height inner drawer, 2 C-height drawers 30 kg & 2 C-height drawers 65 kg
- Steel backs for all white aluminium drawers
- Pre-assembled inner fronts for 400, 500, 600, 800 and 1000 mm white aluminium drawers
- All inox fronts and 900 mm white aluminium are cut to suit components
- Min. internal carcase depth 503 mm

TANDEMBOX ANTARO LARDER UNIT

5 x C-Height

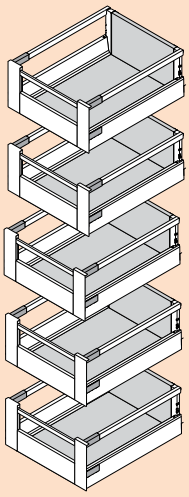

Cabinet Width	White Aluminium	Inox	P.U
400 mm	BPA400	BPA400I	1 set
500 mm	BPA500	BPA500I	1 set
600 mm	BPA600	BPA600I	1 set

Note: Inox inner fronts are cut-to-suit option

Note: Inox backs are timber (not supplied)

TANDEMBOX ANTARO PANTRY UNIT

1 x M-Height

4 x C-Height

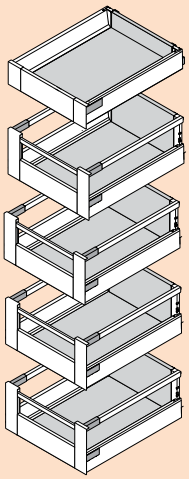

Cabinet Width	White Aluminium	Inox	P.U
800 mm	BPA800	BPA800I	1 set
1000 mm	BPA1000	BPA1000I	1 set

Flanagan Fittings

Subject to technical modifications and changes to the range without notice

TANDEMBOX A Profile Handle

- Allows the standard height drawer to be fitted at the very top of the carcase
- Provides easier opening of top drawer
- Robust nylon contruction
- Simply clips on to inner front
- White Grey finish

TANDEMBOX A Profile Handle



White Grey Finish	P.U
BZIF80M5	25

TANDEMBOX A Profile Handle and Catch

- Allows the standard height drawer to be fitted at the very top of the caracse
- When drawer is opened the top drawer opens with the bottom drawer
- Press the handle at the top drawer easily disconects
- Easily deactivated by turning catch with a coin 180°
- Robust Nylon contruction
- Handle simply clips on to inner front
- Catch requires ø25 mm hole on inside of cabinet door
- White Grey finish

TANDEMBOX A Profile Handle & Catch



White Grey Finish	P.U
BZIF80M7	25

If catch is engaged simply press the release button ...

... the top drawer slides freely to re-enage when drawer is closed

Activate or deactivate catch by turning 180°

Subject to technical modifications and changes to the range without notice

TANDEMBOX Space Corner

The corner cabinet solution from Blum offers a unique solution for kitchens and received the Red Dot design award at Interzum exhibition in 2003.

The corner cabinet uses 650 mm length drawers in either standard or pot drawer height.

TANDEMBOX Space Corner with SYNCROMOTION is designed for use with 1090 x 1090 mm cabinet dimensions. This allows Space Corner to be used with standard 495mm width doors. For full cabinet construction details, please contact our head office or your local sales representative.

Standard height drawer

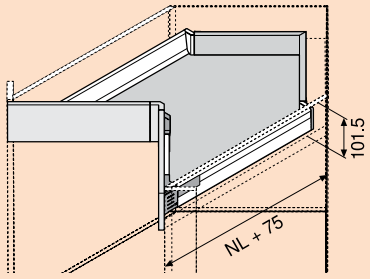

Finish	Art. No.	P.U
White Aluminium	BCUA1090M	1
Inox	BCUA1090MI	1

Pot Drawer Height C

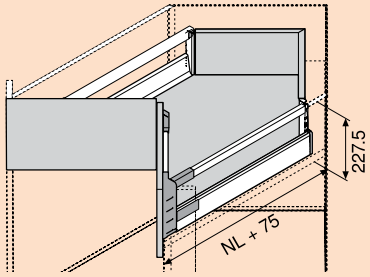

Finish	Art. No.	P.U
White Aluminium	BCUA1090C	1
Inox	BCUA1090CI	1

SPACE CORNER Cabinet

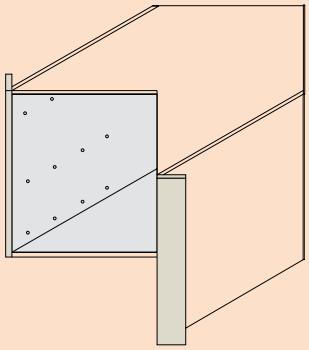

Finish	Art. No.	P.U
White	BCUK1090	1

Flanagan Fittings

Subject to technical modifications and changes to the range without notice

TANDEMBOX SINK DRAWER

Offering all the functionality of the Blum TANDEMBOX drawer, the Sink Unit utilizes space that is often lost in the cabinet.

Wrapping around the bowl and waste section of your sink, the Sink Unit is the ideal space for storage of cleaning products. With a choice of finishes and sizes, and available to suit different door types, the sink unit can easily be selected to suit a variety of kitchen styles.

This unique solution for sink units offers unrivalled access to cleaning equipment normally stored below the sink. Designed for use in 900 and 1000 mm wide drawers, the Sink Cabinet solution works in conjunction with TANDEMBOX Pot drawer.

TANDEMBOX Sink drawer Standard height for Slab Doors

Finish	Art. No.	P.U
White Aluminium	BSU910MS	1
Inox	BSU910MSI	1

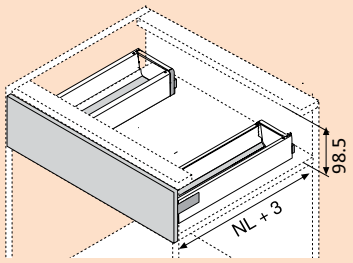

TANDEMBOX Sink drawer C Height for Slab Doors

Finish	Art. No.	P.U
White Aluminium	BSU910CS	1
Inox	BSU910CSI	1



TANDEMBOX Sink drawer C Height for Framed Doors

Finish	Art. No.	P.U
White Aluminium	BSU910CF	1
Inox	BSU910CFI	1

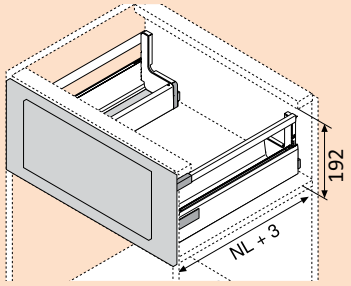

Subject to technical modifications and changes to the range without notice

TANDEMBOX - Accessories

Antaro Screw On Gallery Rails

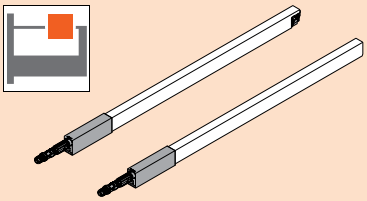

Nominal Length	White Aluminium	P.U
450 mm	BZRG387S	100
500 mm	BZRG437S	100

Antaro adaptor for Screw On Rails



Art Nr.	P.U
BZRF220001	100

Antaro adaptor to convert INSERTA rails to Screw On Rails



Art Nr.	P.U
BZRG000R5F	100

TANDEMBOX adaptor for independent poistioning of gallery Rails



Art Nr.	P.U
BZRR5500	100

Subject to technical modifications and changes to the range without notice

Servo Drive - Introduction

Servo Drive is an electrical drive system, for TANDEMBOX drawers, which is triggered when pushing or pulling the drawer front. User friendly and simple to install, Servo Drive represents the next evolution of kitchen design. Combining the silent and effortless closing action of BLUMOTION, with the opening support of Servo Drive, offers the end user superior function and quality in their kitchen.

FEATURES

- Designed for use with Blum TANDEMBOX
- Only requires an additional 13 mm space behind the drawer when used with steel backs
- One Servo Drive unit for all applications up to 50 kg weights
- Simple easy installation
- Sits behind the drawer and pushes TANDEMBOX open
- Servo Drive does not fall into W.E.E.E directive category
- Certified that no electrician is required for installation
- Pierce technology for quick and easy assembly
- 24 Volt electrical current
- Power failure does not result in failure of drawer function

Servo Drive provides freedom of motion throughout the entire kitchen. Fronts can be used with or without handles, depending on the users' preference. The cutting edge of kitchen design, Servo Drive adds value to the modern kitchen.

Subject to technical modifications and changes to the range without notice

Servo Drive - Overview

Cabinet Overview

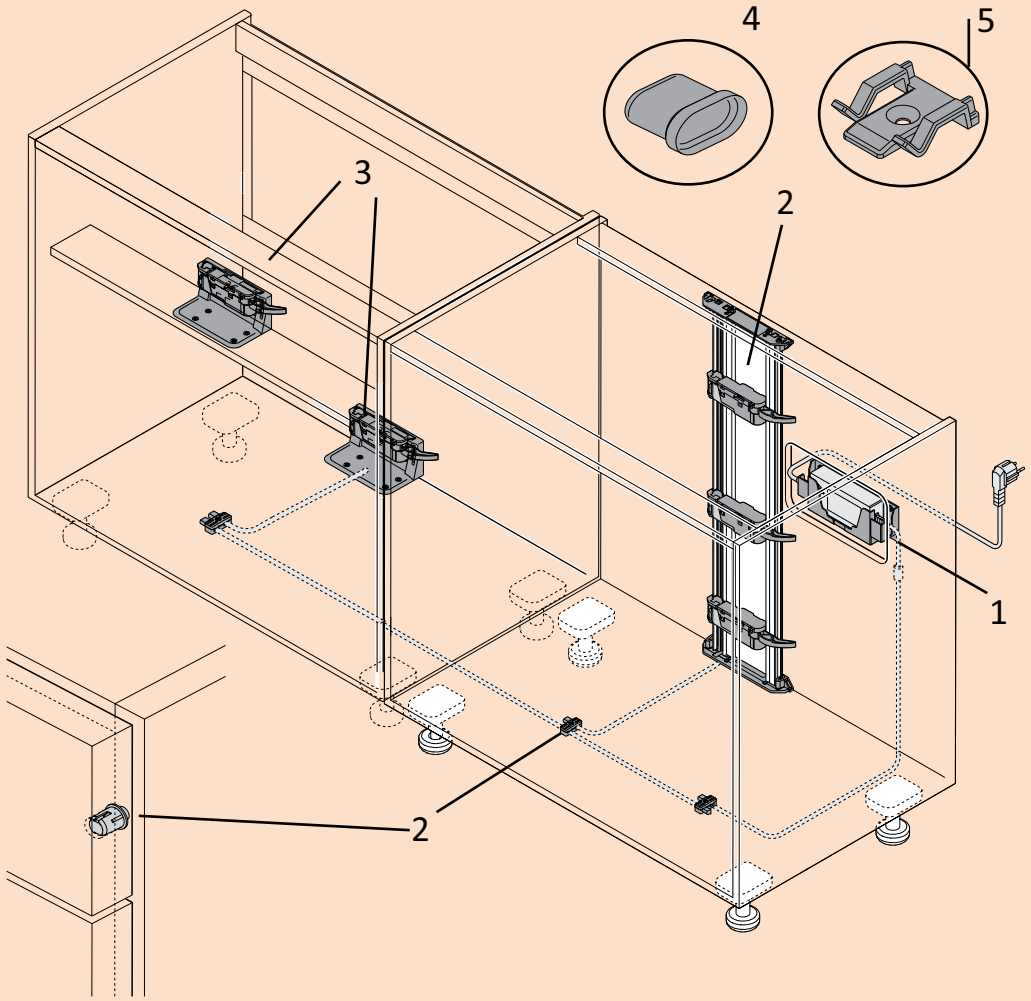

1. TRANSFORMER KIT

The transformer kit provides power to all the Servo Drive units. It consists of a transformer, housing and a 6 metre power distribution cable. You require 1 kit for a single run kitchen and 2 kits for a kitchen with an island.

2. PROFILE KIT

The profile kit fixes to the base and the top cross member. It is supplied complete with drive units, bumpers and connecting node depending on cabinet style. See page 1.44 for order code.

3. ADAPTOR KIT FOR SINK UNIT

Specifically designed for use with Sink Units and other special applications, the kit comes complete with adaptors, drive units, bumpers and connecting nodes.

4. CABLE END PROTECTOR

The cable end protector slots onto the end of cables when they are cut. It prevents dirt, dust, water etc from contaminating the cabling. See page 1.44 for order code.

5. CABLE TIDY

The cable tidy is fixed to the base of the cabinet and allows the power distribution cable and cables from the profile kits to be lifted off the ground and organised neatly. See page 1.45 for order codes.

For more detailed instructions on ordering or assembly, please contact your Sales Representative or Head Office.

Servo Drive - Order Guide

72w TRANSFORMER KIT

1 Per kitchen	Art. No.
	BZ10NE050SET

VERTICAL PROFILE SET

720 /18 mm High Units	Art. No.
	BZ10T674SET

VERTICAL PROFILE SET

Cut to Suit 1170 mm	Art. No.
	BZ10T1170SET

DRIVE UNIT

Full / half power setting	Art. No.
	BZ10A3000

CONNECTING NODE

Transfers power	Art. No.
	BZ10V1000

DOOR BUMPERS

8 mm ø	Art. No.
	9930830

CABLE END PROTECTORS

Protects cables	Art. No.
	BZ10K0008

CABLE HOLDER

Keeps cables in place	Art. No.
	BZ10K0009

BASE ADAPTOR 1 TIER

For base fixing	Art. No.
	BZ10D7101

UPPER BRACKET

For Top Fixing	Art. No.
	BZ10D6252

SYNCHRONISATION CABLE

2 drawers opening	Art. No.
	BZ10K120S

NOTE:

SERVO DRIVE is offered in pre packed kits for easier ordering, please see overleaf for the range of pre packed kits. If you cannot find a suitable kit please select components from the range shown here.

Subject to technical modifications and changes to the range without notice

SERVO-DRIVE Pre-Packed Kits



TRANSFORMER KIT

Description	Art. No.
1x 72w Transformer, 1 x power lead, 6 mtr power distribution cable, 1 connecting node, 3 x cable protector, 1 housing	BZ10NE050SET
1 transformer kit per kitchen run, island units / separate sections may require 2nd kit	



SERVO DRIVE SET FOR 5 DRAWER PACK

Description	Art. No.
1 x Vertical profile, 1 set top/bottom brackets, 5 x drive units, 10 x distance bumper, 1 connecting node, 1 cable protector	BSD5M



SERVO DRIVE SET FOR 3 DRAWER PACK

Description	Art. No.
1 x Vertical profile, 1 set top/bottom brackets, 3 x drive units, 6 x distance bumper, 1 connecting node, 1 cable protector	BSD3MDD



SERVO DRIVE SET FOR 2 DRAWER PACK

Description	Art. No.
1 x Vertical profile, 1 set top/bottom brackets, 2 x drive units, 6 x distance bumper, 1 connecting node, 1 cable protector	BSD2MD



SERVO DRIVE SET FOR 3 DRAWER PACK

Description	Art. No.
1 x Vertical profile, 1 set top/bottom brackets, 3 x drive units, 6 x distance bumper, 1 connecting node, 1 cable protector	BSD3MID



SERVO DRIVE SET FOR 1 UPPER DRAWER

Description	Art. No.
1 x Upper attachment bracket, 1 x drive unit, 2 x distance bumper, 1 connecting node, 1 cable protector	BSD1MU



SERVO DRIVE SET FOR 1 LOWER DRAWER

Description	Art. No.
1 x Single tier lower bracket, 1 x drive unit, 6 x distance bumper, 1 connecting node, 1 cable protector	BSD1DL

Flanagan Fittings

Subject to technical modifications and changes to the range without notice

SERVO-DRIVE Pre-Packed Kits

SERVO-DRIVE SET FOR 4 DRAWER PACK

Description	Art. No.
1 x Vertical profile, 1 set top/bottom brackets, 4 x drive units, 8 x distance bumper, 1 connecting node, 1 cable protector	BSD4M



SERVO-DRIVE SET FOR 2 DRAWER PACK

Description	Art. No.
1 x Vertical profile, 1 set top/bottom brackets, 2 x drive units, 8 x distance bumper, 1 connecting node, 1 cable protector	BSD2DD



SERVO-DRIVE SET FOR 3 DRAWER PACK

Description	Art. No.
1 x Vertical profile, 1 set top/bottom brackets, 3 x drive units, 8 x distance bumper, 1 connecting node, 1 cable protector	BSD3MMD



SERVO-DRIVE SET FOR SINK UNIT DRAWER PACK

Description	Art. No.
2 x Single tier Lower brackets, 2 x drive units, 8 x distance bumper, 2 connecting nodes, 2 cable protectors	BSD2SD



SERVO-DRIVE SET FOR LARDER OR PANTRY UNIT

Description	Art. No.
2 x Lower brackets, 1 x Top bracket, 1 x Back bracket, 1 x Back bracket cover, 1 x 6 mtr Distribution cable 2 x 1170 mm cut-to-suit vertical profiles, 1 x 6 mtr distribution cable, 5 x Drive units, 1 x Connecting node, 1 x Cable end protector	BSD5PU

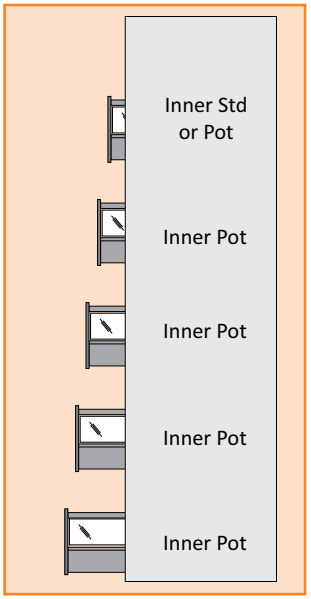

NOTE:
Drawers are sold separately. *With the exception of the Larder / Pantry unit solution shown, all other configurations are based on a 720 mm high cabinet with 18 mm top / bottom*

Subject to technical modifications and changes to the range without notice

Component Parts



ADAPTOR BRACKET FOR DRIVE UNIT

Description	Art. No.
Adaptor bracket used for Sink Unit and other special applications	BZ10D7101



PROFILE KIT WITH BACK & BOTTOM BRACKETS

Description	Art. No.
Cut-to-suit profile max. internal height 713 mm	BZ10T703SETB
Note: Further sizes available by special order	



CABLE TIE

Description	Art. No.
Adhesive and screw fixing for cable organisation	BZ10K0009



BACK ADAPTOR BRACKET

Description	Art. No.
For use with 300 mm cabinets with Timber backs	BZ10A3H00



EXTRA POWER DISTRIBUTION CABLEBACKS

Description	Art. No.
Pre-cut 6 meter length	BZ10K600A
Cut-to-suit 100 meter length	BZ10K1HM

SERVO DRIVE ASSEMBLY JIGS

Description	Art. No.
Jig for profile positioning and drilling	BZML1150
Workshop jig for testing Drive Unit	BZML130A

Subject to technical modifications and changes to the range without notice

Blum TANDEMBOX with TIP-ON

TANDEMBOX TIP-ON

Handle-less drawers and pull-outs will open with reliable ease with TIP-ON for TANDEMBOX.

A single touch on the front is all that's required for drawers to open. Thanks to optional synchronisation, TIP-ON can also be used for wide pull-outs. To close, simply press shut.

TIP-ON cannot be combined with soft-close BLUMOTION. To retain soft-closing BLUMOTION function, use Blum SERVO-DRIVE for TANDEMBOX.

ASK PAUL ABOUT THIS PAGE

TIP-ON Drawer sides and Runners

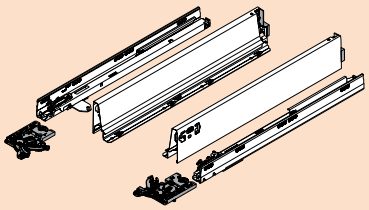

Nominal Length	Weight Capacity	Art. No.	Finish	P.U
270 mm	20 kg	B358M270T	W-Alu	6
450 mm	50 kg	B358M450T	W-Alu	6
500 mm	50 kg	B358M500T	W-Alu	6

- Note: All standard parts work with TIP-ON drawers. See page 1.04 - 1.22
- Other sizes and finishes available by special order, MOQ's apply

Optional Synchronisation Kit (for cabinets ≥ 550 mm width)



Internal Cabinet width	Art. No.	MOQ
508 - 570 mm	BZ55S1350E	10
708 - 770 mm	BZ55S2350E	10
808 - 870 mm	BZ55S2850E	10
908 - 970 mm	BZ55S3350E	10

- Note: Non-Stock item, Minimum order quantity and lead times apply
- Other cabinet dimensions available by special order

Subject to technical modifications and changes to the range without notice

Blum TANDEMBOX Plus

TANDEMBOX Plus Standard height drawer

- Concealed, guided, full extension
- Integrated BLUMOTION soft close
- Drawer side height M = 83 mm
- Unparalleled running action for the lifetime of the furniture
- Steel sides in White Aluminium and Stainless Steel INOX
- 30kg weight carrying capacity 270 mm - 500 mm
- Tool free assembly option
- 2 dimensional front adjustment



Space Requirement

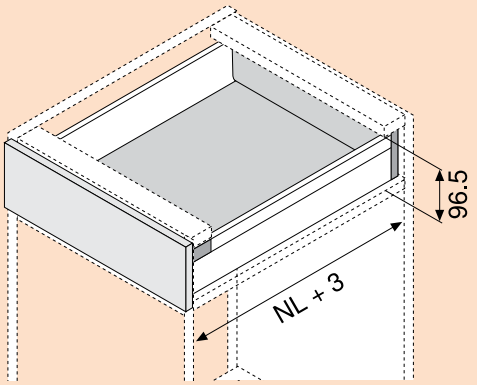

Components

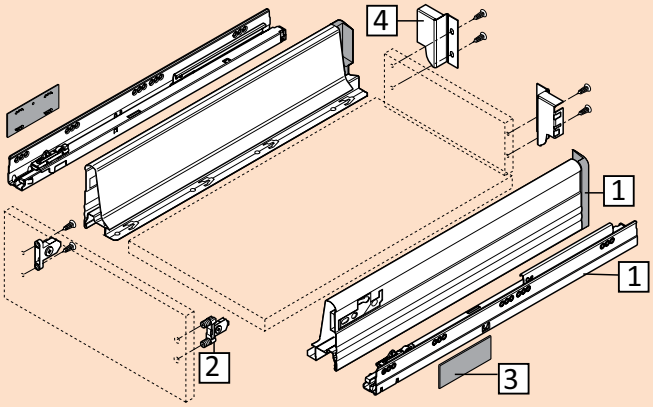

1. Runners and Sides
2. Front-fixing brackets
3. Cover caps
4. Back brackets

Height Requirement

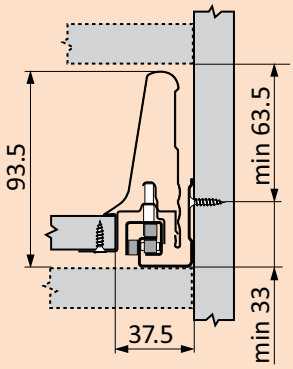

Installation for screw on front-fixing bracket



Front drilling for INSERTA front-fixing brackets



Back installation dimensions



Note: For runner positions and base and back cutting dimensions see Page 1.36

Flanagan Fittings

Subject to technical modifications and changes to the range without notice

TANDEMBOX Plus Standard Drawer

DRAWER SIDES AND RUNNERS

30kg

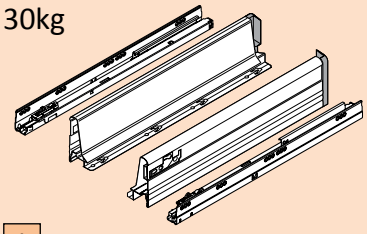

1

Nominal Length	White Aluminium	P.U
270 mm	B358M270B	20
450 mm	B358M450B	20
500 mm	B358M500B	20

FRONT BRACKETS



2

Front Brackets	Screw On	P.U	INSERTA	P.U
(2 Pcs Required)	BZSF3502	500	BZSF3902	500

COVER CAPS



3

Cover Cap	Plain Cover Cap	P.U	Cap with Logo	P.U
(2 Pcs Required)	BZAA330	1000	BZAA330L	1000

BACK BRACKETS

M



4

	White Aluminium	P.U
Left Bracket	BZ30M000L	50
Right Bracket	BZ30M000R	50
Steel Backs	Page 1.16	

Subject to technical modifications and changes to the range without notice

TANDEMBOX Plus Pot Drawer

TANDEMBOX Plus D height Pot drawer

- Concealed, guided, full extension
- Integrated BLUMOTION soft close
- Drawer side height M = 83mm
- Unparalled running action for the lifetime of the furniture
- Steel sides in White Aluminium and Stainless Steel INOX
- 30kg weight carrying capacity 270 mm - 500 mm
- 50kg weight carrying capacity 450 mm - 650 mm
- Tool free assembly option
- 2 dimensional front adjustment



Space Requirement

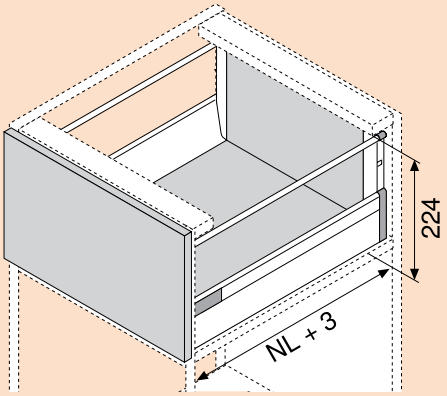

Components

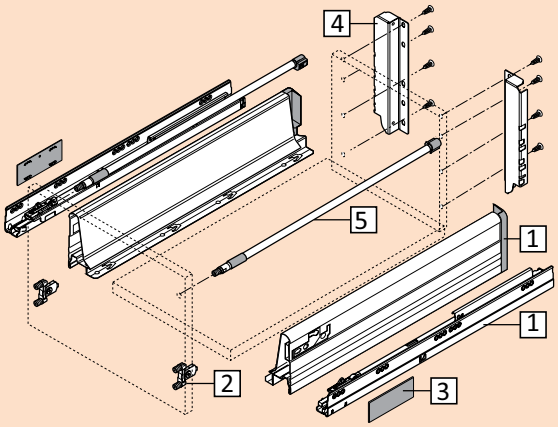

1. Runners and Sides
2. Front-fixing brackets
3. Cover caps
4. Back brackets
5. Gallery Rails

Height Requirement

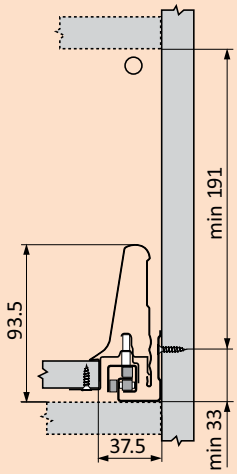

Installation for screw on front-fixing bracket

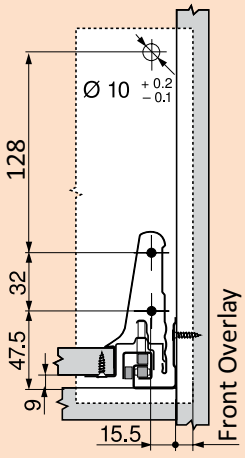

Front drilling for INSERTA front-fixing brackets

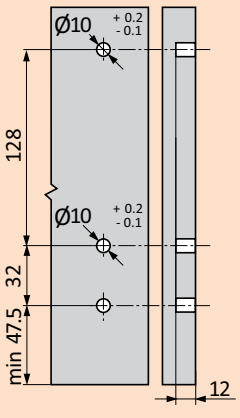

Back installation dimensions

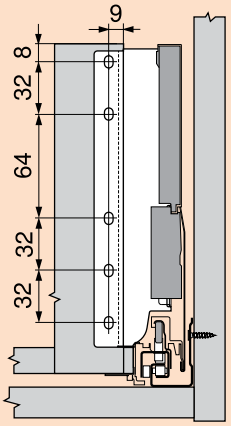

Note: For runner positions and base and back cutting dimensions see Page 1.36

Flanagan Fittings

Subject to technical modifications and changes to the range without notice

TANDEMBOX Plus Pot Drawer

DRAWER SIDES AND RUNNERS

30kg



1

Nominal Length	White Aluminium	P.U
450 mm	B358M450A	20
500 mm	B358M500A	20

FRONT BRACKETS



2

Front Brackets	Screw On	P.U	INSERTA	P.U
(2 Pcs Required)	BZSF3502	500	BZSF3902	500

COVER CAPS



3

Cover Cap	Plain Cover Cap	P.U	Cap with Logo	P.U
(2 Pcs Required)	BZAA330	1000	BZAA330L	1000

BACK BRACKETS

D height



4

	White Aluminium	P.U
Left Bracket	BZ30D000L	50
Right Bracket	BZ30D000R	50
Steel Backs	See page 1.16	

Round Gallery Rails



5

	White Aluminium	P.U
450 mm	BZRG396	-
500 mm	BZRG446	-

NOTE: BOXSIDE can be attached to gallery rails for a solid sided drawer.

BOXSIDE set for TANDEMBOX Plus D height



Nominal Length	White Aluminium	P.U
450 mm	BZRG396	100
650 mm	BZRG596	100

Subject to technical modifications and changes to the range without notice

TANDEMBOX Plus Inner fronts

Used for both Standard and Pot drawers, these pre-assembled inner drawer fronts are easy to use and minimise assembly and construction times. The fronts are available in Silver and Stainless Steel INOX.

For off-standard cabinet sizes these inner drawer fronts can be cut to the size you require. For standard drawers simply slot the cut down profile into the brackets and attach. For pot drawers, a handle and cross bar are attached for ease of access.

TANDEMBOX Plus inner fronts Standard drawers



Cabinet Width	Silver	P.U	Inox	P.U
400 mm	BZIS276M0	30	BZIS276M0I	30
500 mm	BZIS376M0	30	-	30
600 mm	BZIS476M0	30	-	30
800 mm	BZIS676M0	30	BZIS676M0I	30
900 mm	BZIS776M0	30	-	30
1000 mm	BZIS876M0	30	-	30

TANDEMBOX Plus Inner fronts D height



Cabinet Width	Silver	P.U	Inox	P.U
400 mm	BZIS276D2G	15	BZIS276D2GI	15
500 mm	BZIS376D2G	15	BZIS376D2GI	15
600 mm	BZIS476D2G	15	-	15
800 mm	BZIS676D2G	15	-	15
900 mm	BZIS776D2G	15	BZIS776D2GI	15
1000 mm	BZIS876D2G	15	-	15

TANDEMBOX Plus inner fronts Standard drawers CUT-TO-SUIT

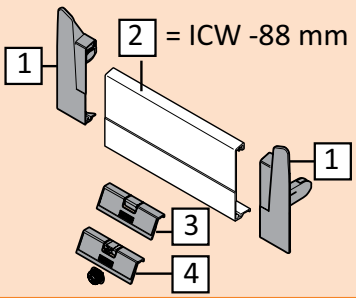

Nr.	Detail	Silver	Inox	P.U
1.	Front brackets	BZIF70M0 L+R		1
2.	Drawer Front 1081 mm *	BZ31A1081	BZ31A1081SS	1
3.	Handle	BZIF7005		1
4.	Handle & Catch	BZIF7007		1

* CUT-TO-SUIT dimension = Internal Carcase Width (ICW) - 88 (See diagram)

TANDEMBOX Plus inner fronts D height Pot drawers CUT-TO-SUIT



Nr.	Detail	Silver	Inox	P.U
1.	Front brackets	BZIF70M0 L+R		1
2.	Drawer Front 1081 mm *	BZ31A1081	BZ31A1081SS	1
3.	Top Rail 1094 mm*	BZRG1094U	BZRG1094USS	1
4.	Handle for D height	BZIF7008		1

* CUT-TO-SUIT dimension = Internal Carcase Width (ICW) - 88 (See diagram)

Flanagan Fittings

Subject to technical modifications and changes to the range without notice

TANDEMBOX Plus Larder Unit Solutions

TANDEMBOX Plus Larder Solutions

- Complete set of components to manufacture a Blum Larder or Pantry Unit
- Includes 4 pcs of ZERO protrusion hinge
- Larder Units in 400, 500 and 600 mm cabinets widths c/w 5 D height drawers
- Pantry units in 800, 900 & 1000 mm cabinet widths c/w 1 standard height inner drawer & 4 D height drawers
- Steel backs for all white aluminium drawers
- Pre-assembled inner fronts for 400, 500, 600, 800 and 1000 mm white aluminium drawers
- All inox fronts and 900 mm white aluminium are cut-to-suit components
- Minimum internal carcase depth 503 mm

NOTE: Standard depth is 500 mm; however other depths from 450 mm to 550 mm are available by special request. Drawer bases are not supplied with the kit.

TANDEMBOX Plus Larder Units

Cabinet Width	White Aluminium	Inox	P.U
400 mm	BP50400	BP50400I	1 set
500 mm	BP50500	BP50500I	1 set
600 mm	BP50600	BP50600I	1 set

- The Larder Unit comes equipped with 5 Inner Pot Drawers with Boxside
- Available for cabinet widths 400 mm, 500 mm and 600 mm
- Full organisation potential when used with ORGA-LINE
- All pull outs have integrated BLUMOTION soft close
- Available for Metallic Silver and Stainless Steel INOX finishes
- INOX fronts are cut to suit (See page 1.34)

TANDEMBOX Plus Pantry Units

Cabinet Width	White Aluminium	Inox	P.U
800 mm	BP50800	BP50800I	1 set
900 mm	BP50900	BP50900I	1 set
1000 mm	BP501000	BP501000I	1 set

- Equipped with 1 x inner and 4 x high front inner pull outs
- Available for cabinet widths 800 mm, 900 mm and 1000 mm
- The pantry has full organisation potential when used with ORGA-LINE
- All pull outs have integrated BLUMOTION soft close
- Available for Metallic Silver and Stainless Steel INOX finishes
- INOX fronts are cut to suit (See page 1.34)

Subject to technical modifications and changes to the range without notice

Fixing Dimensions

Standard height drawer

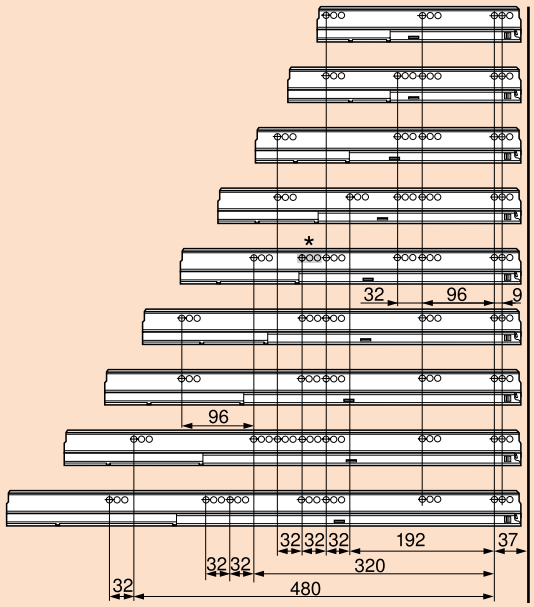

Drawer length	Min.. Internal Depth	Loss of extension
270 mm	273 mm	0 mm
300 mm	303 mm	0 mm
350 mm	353 mm	0 mm
400 mm	403 mm	0 mm
450 mm	453 mm	0 mm
500 mm	503 mm	0 mm
550 mm	553 mm	0 mm
600 mm	603 mm	0 mm
650 mm	653 mm	0 mm

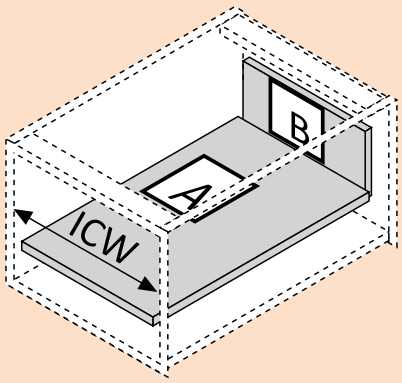

ICW = Internal Carcase Width

We stock a large range of pre-cut timber bases and steel backs (see page 1.16). In the event that you decide to cut your own bases or timber backs please note that the dimensions below are based on 16 mm thick board.

Base Cutting Dimensions

	Width	Length
Chipboard back	Internal Carcase Width - 76 mm	Drawer Length - 24 mm
Steel back	Internal Carcase Width - 76 mm	Drawer Length - 22 mm

Back Cutting Dimensions

	Height	Width	Length
Shallow Drawer	N	Internal Carcase Width - 88 mm	69 mm
Standard Drawer	M	Internal Carcase Width - 88 mm	84 mm
Pot Drawer	C	Internal Carcase Width - 88 mm	167 mm
Pot Drawer	D	Internal Carcase Width - 88 mm	199 mm

Flanagan Fittings

Subject to technical modifications and changes to the range without notice

Fixing Dimensions

TANDEMBOX Sink Unit

Base & Back





ICW = Internal Carcase Width,
SPW = Interal width between sink drawer sides
Y min.. = 48 mm
Y Max = 225 mm



TANDEMBOX TIP-ON

Height Requirement



TIP-ON Locking mechanisim fixing dimensions

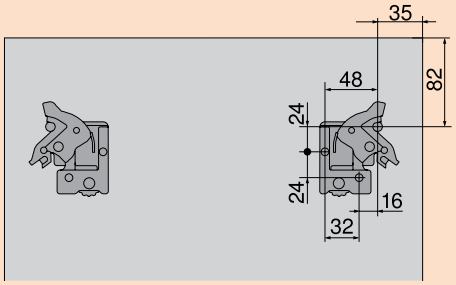

Installation for screw on front-fixing bracket



TIP-ON Synchronisation unit fitting dimensions

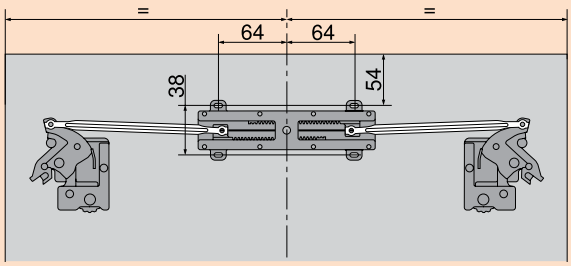

Front Fixing

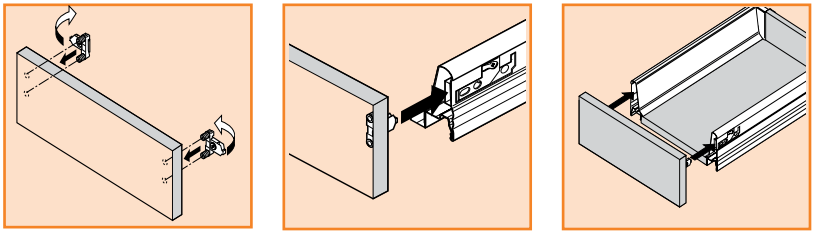

Gallery Fixing

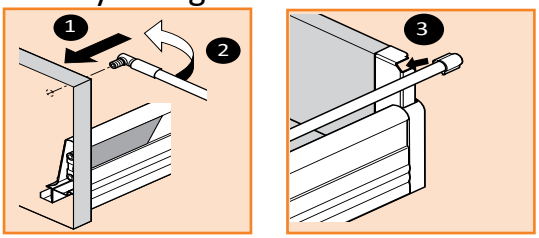

Adjustment

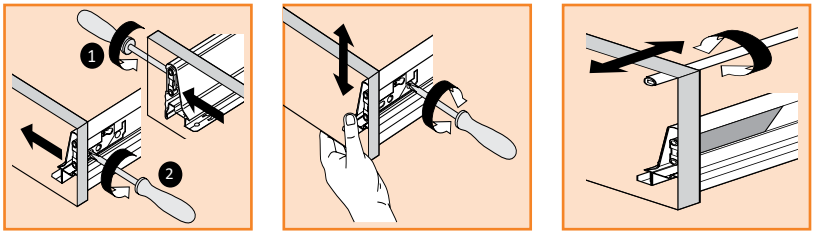

Insertion and Removal

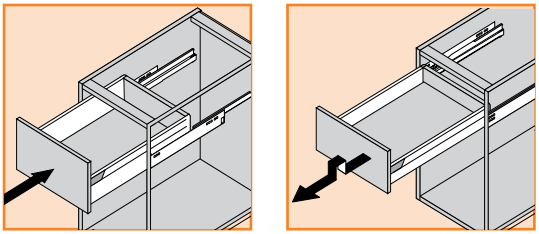

Subject to technical modifications and changes to the range without notice

SERVO-DRIVE Technical

HORIZONTAL CROSS MEMBER

The horizontal cross member allows for the fixing of the profile to the cabinet on the top and bottom.

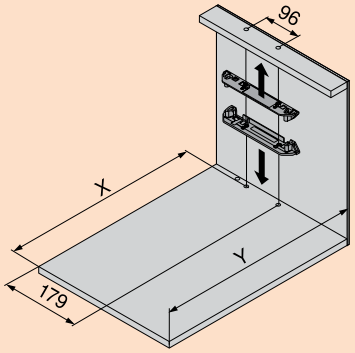

X = Profile Fixing Positions

Steel Drawer Back = Drawer Depth -1 mm
Timber Drawer Back = Drawer Depth +16 mm

Y = Minimum Internal Cabinet Depth

Steel Drawer Back = Drawer Depth +13 mm
Timber Drawer Back = Drawer Depth +30 mm

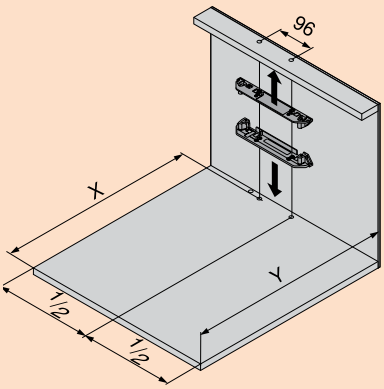

VERTICAL CROSS MEMBER

Where cabinet construction does not allow for use of the Horizontal Cross Member, the vertical cross member allows for the fixing of the profile to the base and back of the cabinet.

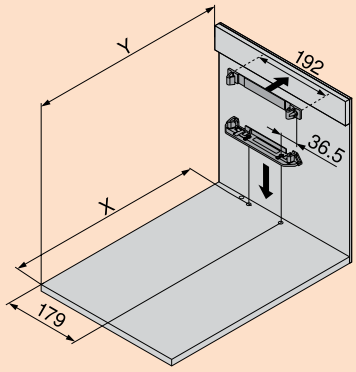

X = Profile Fixing Positions

Steel Drawer Back = Drawer Depth -1 mm
Timber Drawer Back = Drawer Depth +16 mm

Y = Minimum Internal Cabinet Depth

Steel Drawer Back = Drawer Depth +14 mm
Timber Drawer Back = Drawer Depth +31 mm

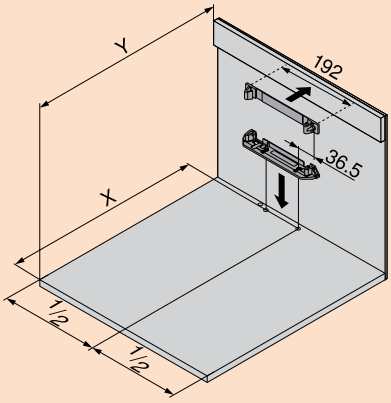

SINK UNIT APPLICATION

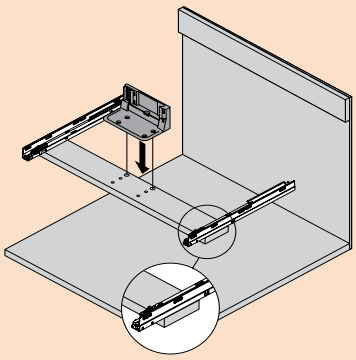

Shelf Position

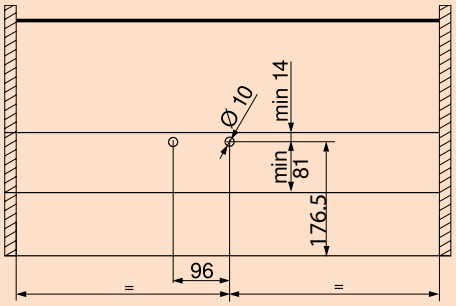

Cabinet Shelf Drilling

Note: For lower drawer, use adaptor bracket with standard drilling pattern on base of cabinet.

Flanagan Fittings

Subject to technical modifications and changes to the range without notice

PROFILE BRACKET DRILLING POSITIONS

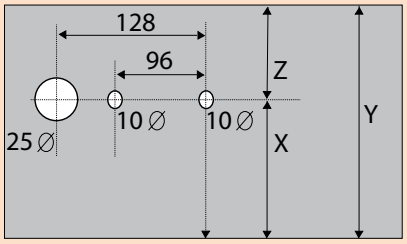

CABINET BASE
X = Fixing Positions
Y = Internal Depth
Z = Y - X

CROSS PROFILE
Y1 = Profile Depth
X1 = Y1 - Z

SPACE REQUIREMENTS

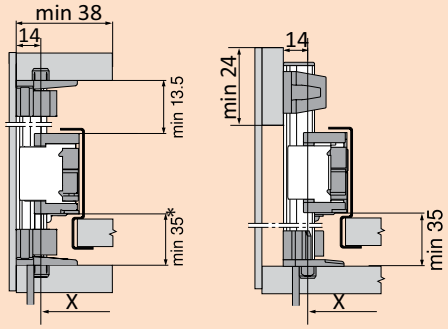

X = Profile fixing positions: Steel Back Drawer Depth - 1
or Timber Back Drawer Depth + 16 mm
*min. 27.5 mm for N Height Steel Back
NOTE: Minimum depth of horizontal cross member is 38 mm; however it is recommended depth is 100 mm for maximum flexibility.

BACK PROFILE FOR CUTTING TO SIZE

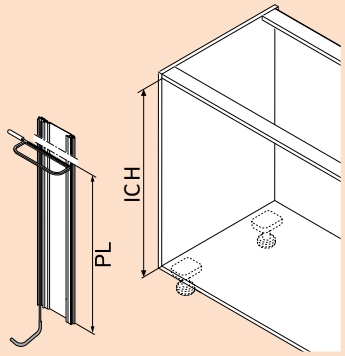

ICH = Internal Cabinet Height
PL = Profile Length

PL = ICH - 10 mm

DRIVE UNIT FIXING POSITIONS

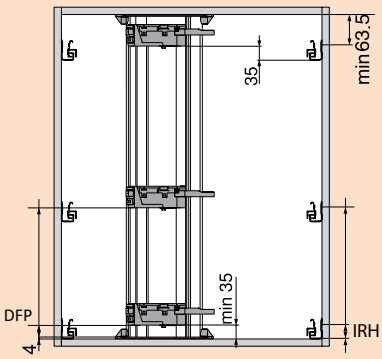

IRH = Internal Fixing Height of Runner
DRP = Drive Unit Fixing Position on Profile

DFP = IRH - 2 mm

DRAWER FRONT FIXING POSITIONS

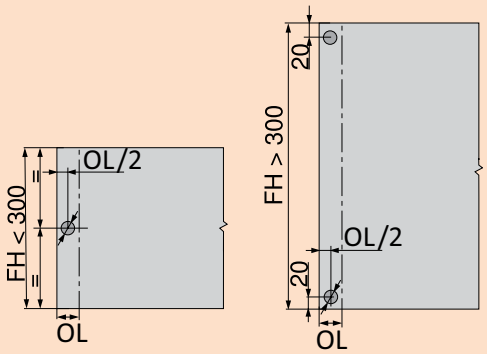

OL = Overlay on Gable
FH = Front Height
8 mm Hole
Min. 10 mm Depth

SPACE & SAFETY DISTANCE FOR TRANSFORMER HOUSING



Maintain 30 mm space around all edges of the transformer in order to avoid the risk that the Blum transformer could overheat.

Subject to technical modifications and changes to the range without notice

SERVO DRIVE Installation

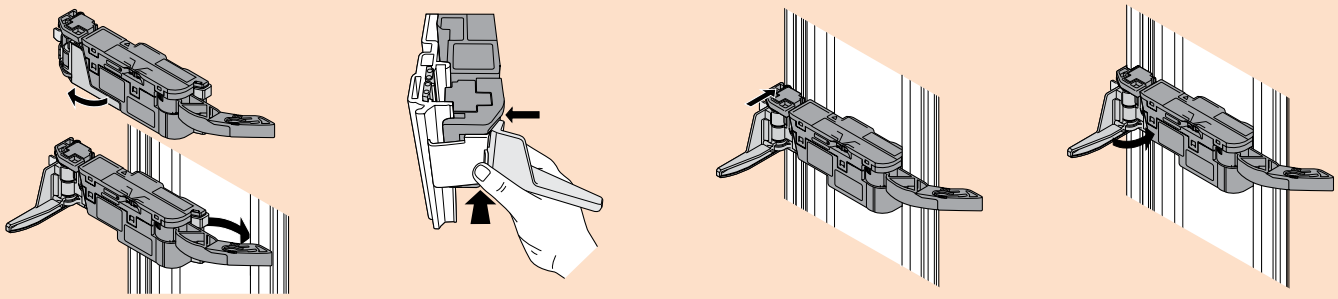

1. Open lever and position Drive Unit on right of profile
2. Open clamp on left side of Drive Unit and position on left of profile
3. Press Drive Unit firmly in place
4. Close lever to engage pinch technology

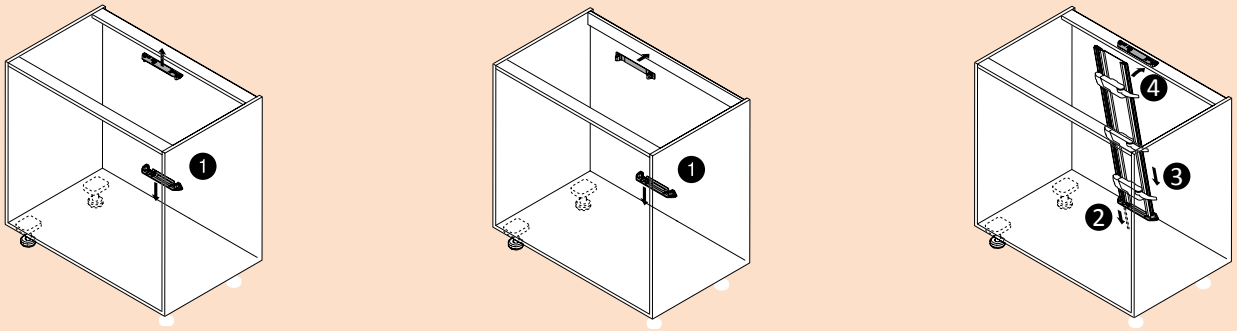

1. Fix brackets to cabinet (top or back option)
2. Slide cable through base
3. Clip profile into base bracket
4. Clip profile into top bracket OR Clip profile into back bracket



Fix Power Cable into Transformer and insert into housing.
NOTE: Housing ensures power cable will not pull out of transformer.



Pull Transformer Cable to the front of the cabinet and secure to Power Distribution cable with Connecting Node.



Once power is switched on, the illumination of lights on the Drive Unit(s) and Transformer indicate that SERVO DRIVE is ready for use.

NOTE: Cables are designed so that they cannot be inserted into connecting nodes incorrectly.

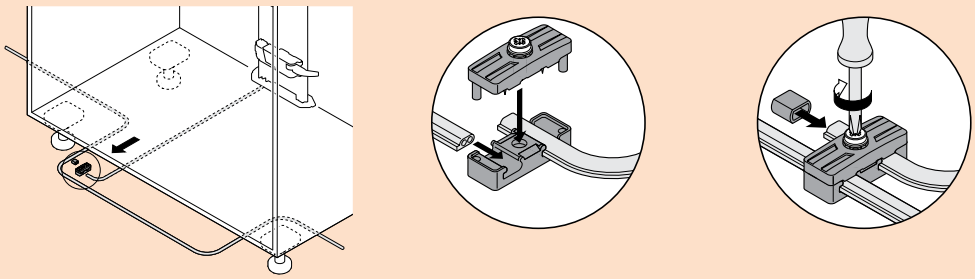

Flanagan Fittings

Subject to technical modifications and changes to the range without notice